


V750F DRAINAGE PUMP

CW FLOAT SWITCH & 6M CABLE

Performance Chart

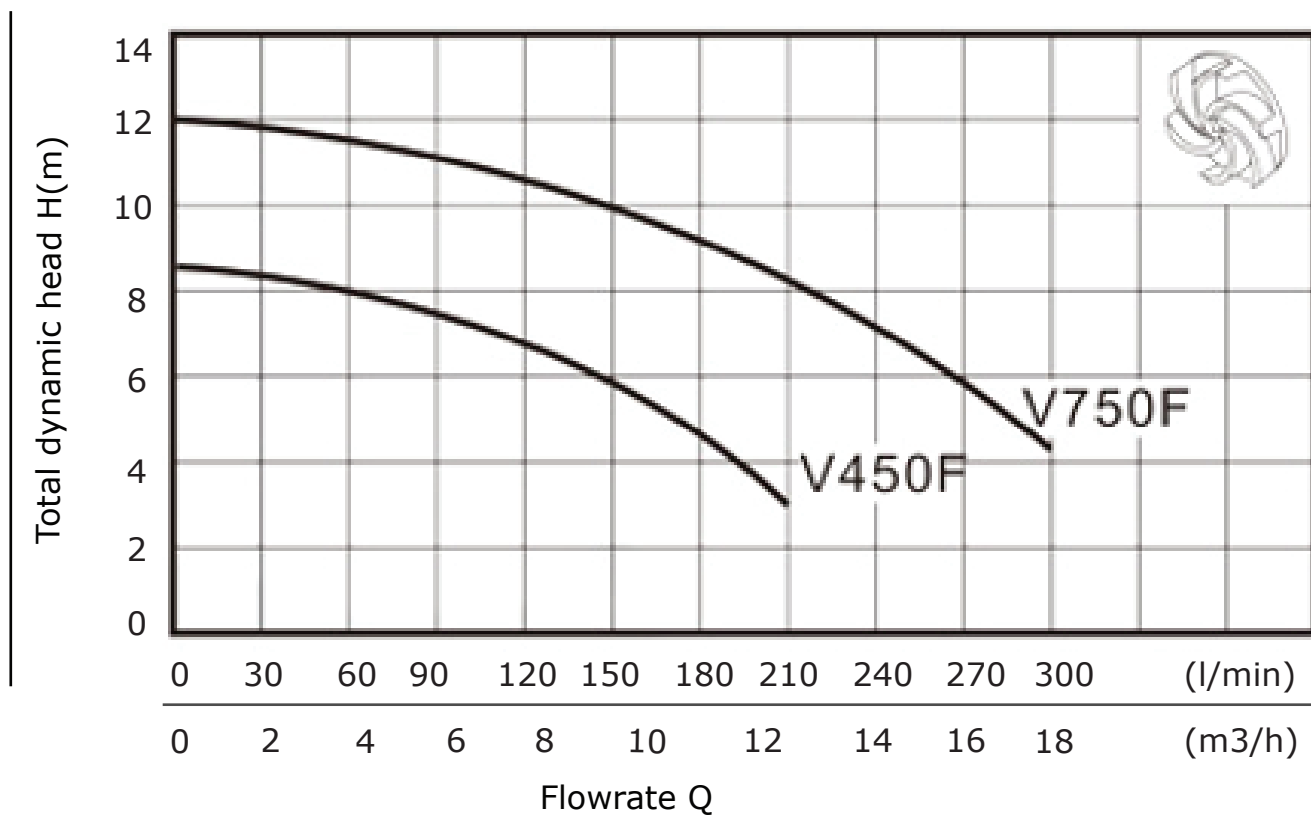

Performance Table

| Model | Power (kW) | Outlet Diameter (mm) | Voltage/Frequency (V/Hz) | Max. Flow (l/min) | Max. Head (m) | Max. Diameter of Particle (mm) | G.W. (kg) |
|-------|------------|----------------------|--------------------------|-------------------|---------------|--------------------------------|-----------|
| V750F | 0.75 | 50 | 220/50 | 300 | 12 | 25 | 21 |



Application

- Waste water drainage in factories, construction sites and commercial facilities
- Drainage system in municipal sewage treatment plants
- Drainage stations in residential quarters
- Municipal projects
- Methane pools and field irrigation in countryside

Pump

- Max. immersion depth: 5 m
- Max. liquid temperature: 40 C
- Liquid pH value: 4-10
- Max. liquids density: 1.2 x 10kg/m

Motor

- Copper winding
- Built-in thermal protector
- Stainless steel welded shaft
- Insulation Class: B
- Protection Class: IPX8