


# DIMENSIONS AND WEIGHTS

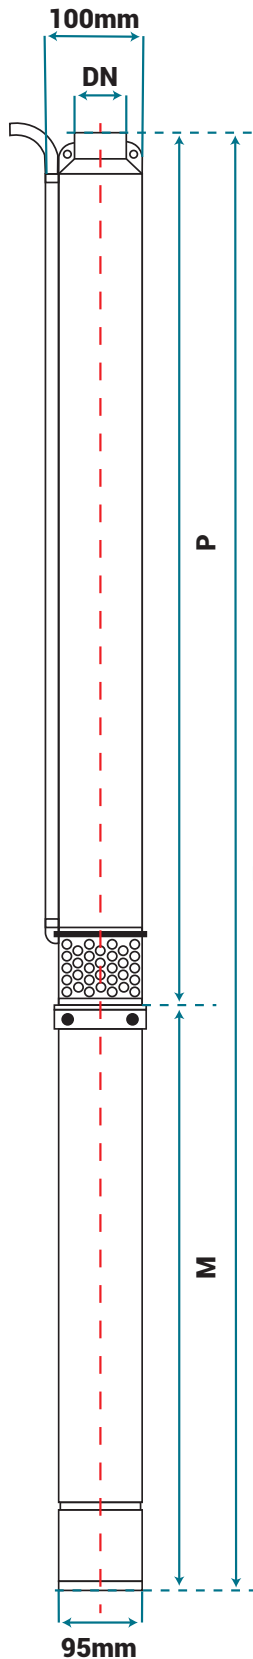

MODEL		DN	DIMENSIONS (mm)					WEIGHTS (kg)				
1 - 220-240V	3 - 380 - 415V		P	M(s)	M(T)	T(s)	T(T)	P	M(s)	M(T)	T(s)	T(T)
4SDM10/5	4SD10/5	2"	418	359	344	777	762	3.0	8.7	8.0	11.7	11.0
4SDM10/6	4SD10/6	2"	456	379	379	835	835	3.3	9.8	9.8	13.1	13.1
4SDM10/7	4SD10/7	2"	494	399	379	893	873	3.6	10.6	9.8	14.2	13.4
4SDM10/8	4SD10/8	2"	532	424	424	956	956	3.9	11.7	11.7	15.6	15.6
4SDM10/10	4SD10/10	2"	609	449	424	1058	1033	4.5	12.9	11.7	17.4	16.2
4SDM10/12	4SD10/12	2"	716	502	514	1218	1231	5.1	15.7	15.7	20.8	20.8
4SDM10/14	4SD10/14	2"	793	542	514	1335	1307	5.7	17.7	15.7	23.4	21.4
4SDM10/16	4SD10/16	2"	869	594	554	1463	1423	6.3	19.8	17.7	26.1	24.0
-	4SD10/18	2"	945	-	594	-	1539	6.9	-	19.8	-	26.7
-	4SD10/20	2"	1021	-	658	-	1679	7.5	-	21.4	-	28.9
-	4SD10/22	2"	1097	-	698	-	1796	8.1	-	23.7	-	31.8
-	4SD10/25	2"	1212	-	738	-	1950	9.0	-	25.5	-	34.5
-	4SD10/28	2"	1357	-	788	-	2146	9.8	-	28.0	-	37.8
-	4SD10/32	2"	1510	-	848	-	2358	11.0	-	30.0	-	41.0
-	4SD10/36	2"	1662	-	908	-	2570	12.2	-	34.0	-	46.2
4SDM12/4	4SD12/4	2"	452	359	344	811	796	3.1	8.7	8.0	11.8	11.1
4SDM12/5	4SD12/5	2"	508	379	379	887	887	3.5	9.8	9.8	13.3	13.3
4SDM12/6	4SD12/6	2"	564	399	379	963	943	3.8	10.6	9.8	14.4	13.6
4SDM12/7	4SD12/7	2"	620	424	424	1044	1044	4.2	11.7	11.7	15.9	15.9
4SDM12/8	4SD12/8	2"	676	449	424	1125	1100	4.6	12.9	11.7	17.5	16.3
4SDM12/10	4SD12/10	2"	819	502	514	1321	1334	5.4	15.7	15.7	21.1	21.1
4SDM12/12	4SD12/12	2"	931	542	514	1473	1445	6.1	17.7	15.7	23.8	21.8
4SDM12/14	4SD12/14	2"	1043	594	554	1637	1597	6.9	19.8	17.7	26.7	24.6
-	4SD12/16	2"	1155	-	594	-	1749	7.6	-	19.8	-	27.4
-	4SD12/18	2"	1298	-	658	-	1956	8.4	-	21.4	-	29.8
-	4SD12/20	2"	1410	-	698	-	2108	9.2	-	23.7	-	32.9
-	4SD12/23	2"	1578	-	738	-	2316	10.3	-	25.5	-	35.8
-	4SD12/26	2"	1745	-	788	-	2533	11.4	-	28.0	-	39.4
-	4SD12/29	2"	1944	-	848	-	2793	12.6	-	30.0	-	42.6
-	4SD12/32	2"	2143	-	908	-	3020	13.7	-	34.0	-	47.7
4SDM16/4	4SD16/4	2"	502	399	379	907	881	3.4	10.6	9.8	14.0	13.2
4SDM16/5	4SD16/5	2"	570	424	424	994	995	3.8	11.7	11.7	15.5	15.5
4SDM16/6	4SD16/6	2"	639	449	424	1088	1063	4.3	12.9	11.7	17.2	16.0
4SDM16/8	4SD16/8	2"	807	502	514	1309	1322	5.2	15.7	15.7	20.9	20.9
4SDM16/9	4SD16/9	2"	876	542	514	1418	1390	5.6	17.7	15.7	23.3	21.3
4SDM16/11	4SD16/11	2"	1013	594	554	1607	1567	6.5	19.8	17.7	26.3	24.2
-	4SD16/12	2"	1081	-	594	-	1675	7.0	-	19.8	-	26.8
-	4SD16/14	2"	1218	-	658	-	1876	7.9	-	21.4	-	29.3
-	4SD16/16	2"	1386	-	698	-	2084	8.8	-	23.7	-	32.5
-	4SD16/18	2"	1523	-	738	-	2261	9.7	-	25.5	-	35.2
-	4SD16/20	2"	1660	-	788	-	2448	10.6	-	28.0	-	38.6
-	4SD16/23	2"	1897	-	848	-	2745	11.9	-	30.0	-	41.9
-	4SD16/25	2"	2034	-	908	-	2942	12.8	-	34.0	-	46.8

\* M(s) is single phase motor, M(T) is three phase motor.

\* T(s) is single phase motor, T(T) is three phase motor.