

Applications

- Water supply
- Industry pressure boosting
- Industry liquid transfer
- Water treatment
- Irrigation

Motor

- Fitted with a totally enclosed fan-cooled, 2-pole motor
- Enclosure class: IP55
- Insulation class: F
- Supply voltage: 50Hz or 60Hz


Operation conditions

- Thin, clean, non-explosive liquids, not containing solid particles or fibers liquid
- Liquid temperature: normal temperature type: -15°C~+70°C hot water type: -15°C~+105°C
- Ambient temperature: maximum +40°C
- Altitude: maximum 1000m

Material


- Inlet&outlet chamber: Cast iron/Stainless steel(304/316)
- Impeller: Stainless steel(304/316)
- Shell: Stainless steel(304/316)
- Shaft: Stainless steel(304/316)
- Coupling: Ductile iron
- Bearing: Tungsten carbide
- Mechanical seal: Tungsten carbide/Graphite

Performance Curves

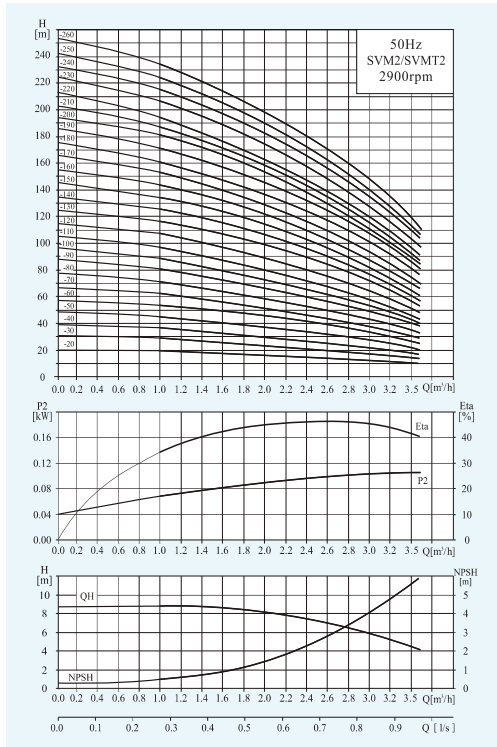

Performance Table

Model	Associated motor(kw)	Q (m ³ /h)	H (m)								
			1	1.2	1.6	2.0	2.4	2.8	3.2	3.5	
SVM2-20	0.37	18	17	16	15	13	12	10	8		
SVM2-30	0.37	27	26	24	22	20	18	15	12		
SVM2-40	0.55	36	35	33	30	26	24	20	16		
SVM2-50	0.55	45	43	40	37	33	30	24	20		
SVM2-60	0.75	53	52	50	45	40	36	30	24		
SVM2-70	0.75	63	61	57	52	47	41	35	28		
SVM2-90	1.1	80	78	73	67	61	54	45	37		
SVM2-110	1.1	98	95	89	82	73	64	54	44		
SVM2-130	1.5	116	114	106	98	89	78	65	52		
SVM2-150	1.5	134	130	123	112	100	90	73	60		
SVM2-180	2.2	161	157	148	136	121	108	91	76		
SVM2-220	2.2	197	192	180	165	148	130	110	90		
SVM2-260	3.0	232	228	214	198	179	158	130	110		

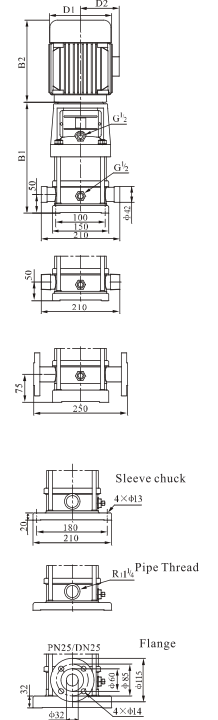

Dimension & Weight

Model	Size (mm)					Net Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM2-20	258	225	483	148	117	20
SVM2-30	276	225	501	148	117	20
SVM2-40	294	225	519	148	117	22
SVM2-50	312	225	537	148	117	23
SVM2-60	340	245	585	170	142	26
SVM2-70	358	245	603	170	142	26
SVM2-90	394	245	639	170	142	28
SVM2-110	430	245	675	170	142	29
SVM2-130	476	290	766	190	155	35
SVM2-150	512	290	802	190	155	36
SVM2-180	566	290	856	190	155	41
SVM2-220	638	290	928	190	155	42
SVM2-260	720	345	1065	197	165	52