
AquaDuty AQD 60 / 70 / 80 Peripheral Pumps

Performance curves and technical data (50 Hz).

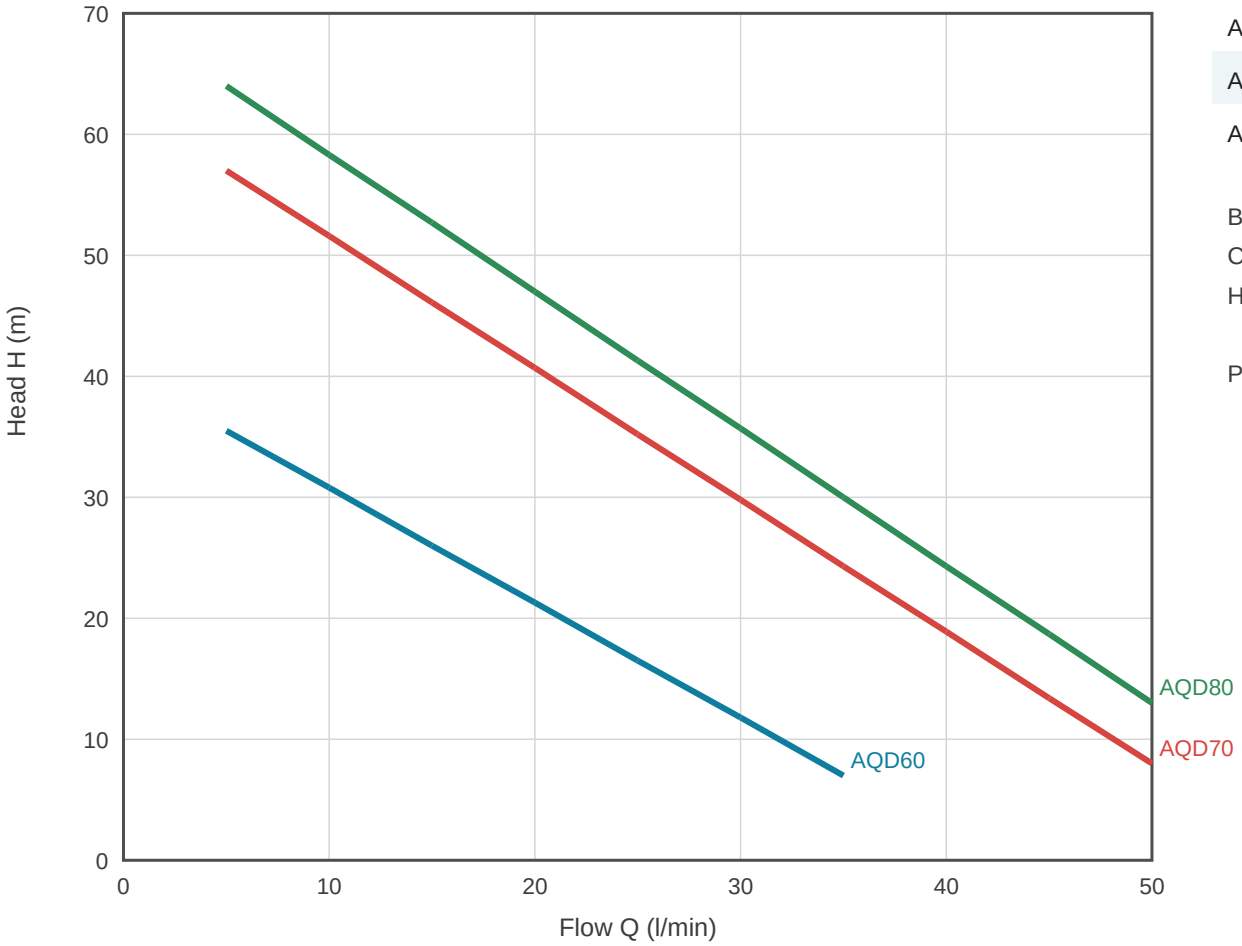

Model	Motor	Supply	Max head	Max flow
AQD 60	0.37 kW	230 V	35.5 m	35 l/min
AQD 70	0.55 kW	230 / 400 V	57 m	50 l/min
AQD 80	0.75 kW	230 / 400 V	64 m	50 l/min

Brass peripheral impeller, 2850 rpm, 50 Hz.
Clean water up to 60 °C. M = 230 V, T = 400 V.
Heads at 5 l/min to end of curve (approximate).

Pumps On Line - www.pumps.co.za