


TYPICAL AVERAGE PUMP PERFORMANCE	
TESTED ON WATER AT 20 °C	
INLET/OUTLET	Ø 40 (1½")
MAX. DIFF. HEAD	450 m
MIN. STARTING TORQUE	22 Nm

HD7

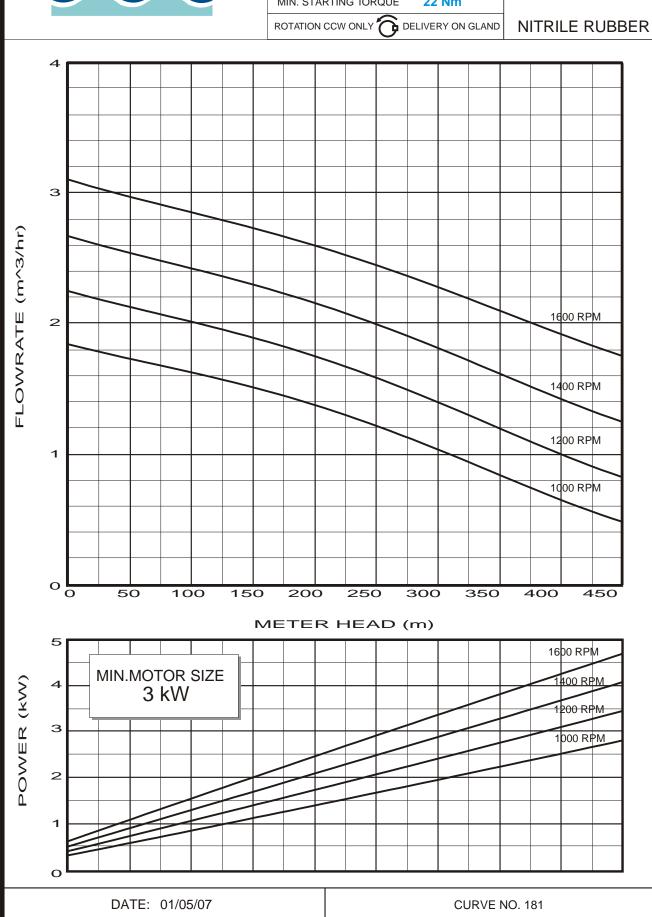

MANUFACTURED BY Franklin Electric