
Meudy KBV / KS Submersible Drainage Pumps

Performance curves and technical data (2850 rpm, 50 Hz). 50 mm outlet.

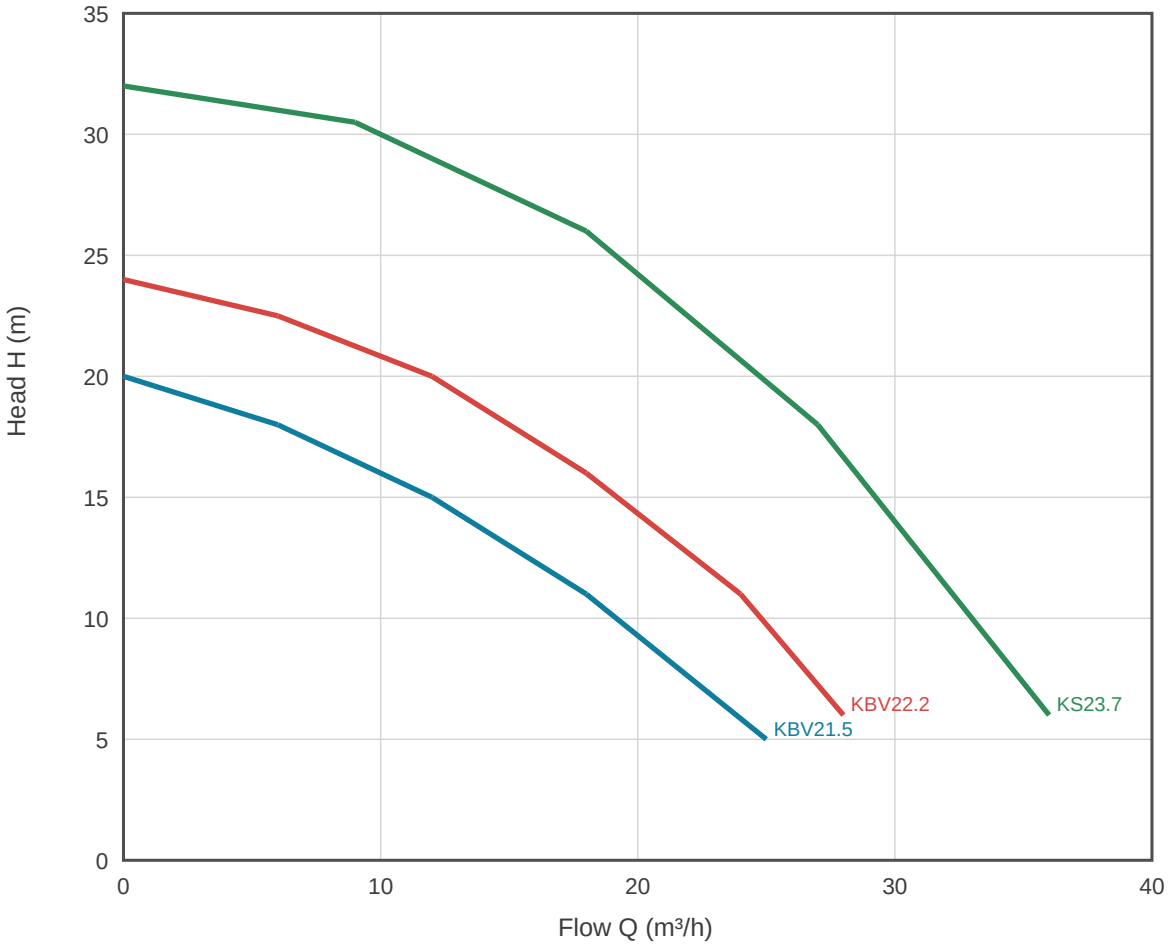

Model	Motor	Outlet	Rated duty	Max H / Q
KBV21.5	1.5 kW	50 mm	12 m³/h @ 15 m	20 m / 25
KBV22.2	2.2 kW	50 mm	12 m³/h @ 20 m	24 m / 28
KS23.7	3.7 kW	50 mm	18 m³/h @ 26 m	32 m / 36

KBV: lightweight aluminium alloy body, ductile iron impeller.

KS: cast iron drainage pump, 8.5 mm solids.

Three-phase 400 V or 525 V, 50 Hz.

Max. liquid temperature 40 °C, IP68 motor.

Data per manufacturer performance table.

Pumps On Line - www.pumps.co.za