

SVM64




SVM64




Performance table

Model	Associated motor(kW)	Q (m ³ /h)	30	40	50	60	64	70	80
SVM64-10-1	4.0	H (m)	19	18	16	14	13	11	8
SVM64-10	5.5		27	25	23	21	20	18	15
SVM64-20-2	7.5		39	36	33	29	27	23	17
SVM64-20-1	11		46	44	40	36	34	30	24
SVM64-20	11		53	51	47	43	41	37	30
SVM64-30-2	15		66	62	56	50	47	41	32
SVM64-30-1	15		73	69	63	57	54	48	39
SVM64-30	18.5		80	76	70	64	61	55	46
SVM64-40-2	18.5		92	87	80	71	67	60	47
SVM64-40-1	22		100	94	87	78	74	67	54
SVM64-40	22		107	101	94	85	81	74	61
SVM64-50-2	26		121	114	105	95	89	80	64
SVM64-50-1	26		128	121	112	102	96	87	71
SVM64-50	30		136	129	119	109	103	94	78
SVM64-60-2	30		150	142	131	118	111	101	81
SVM64-60-1	37		157	149	138	125	118	108	88
SVM64-60	37		164	156	145	132	125	115	95
SVM64-70-2	37		179	169	156	141	133	121	99
SVM64-70-1	37		186	176	163	148	141	128	106
SVM64-70	45		193	183	170	155	148	135	112
SVM64-80-2	45		207	196	182	164	156	142	116
SVM64-80-1	45		215	203	189	171	163	149	123

Performance curves

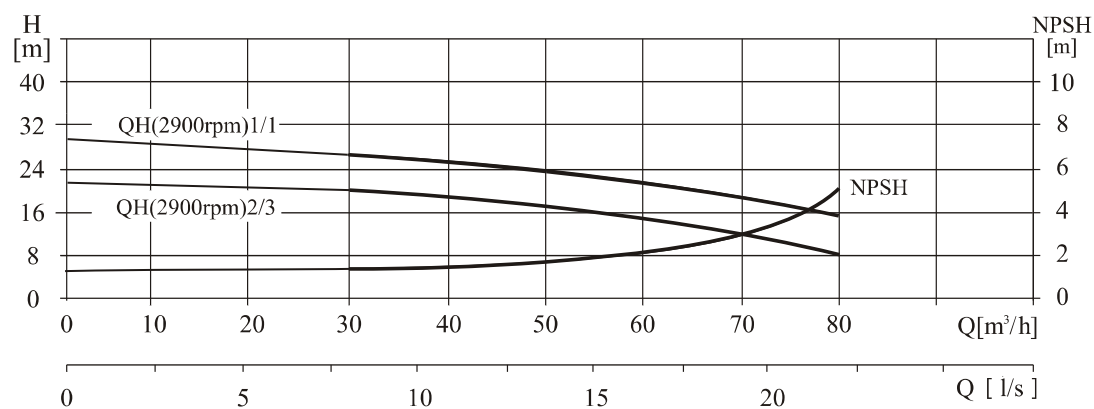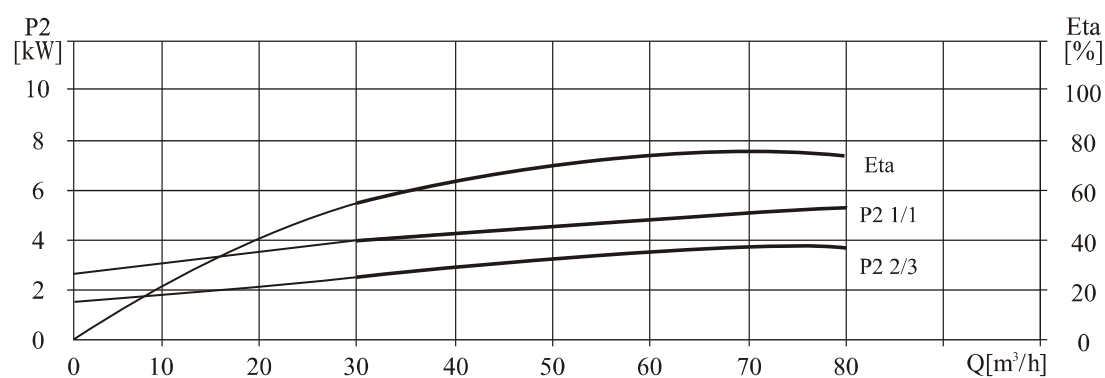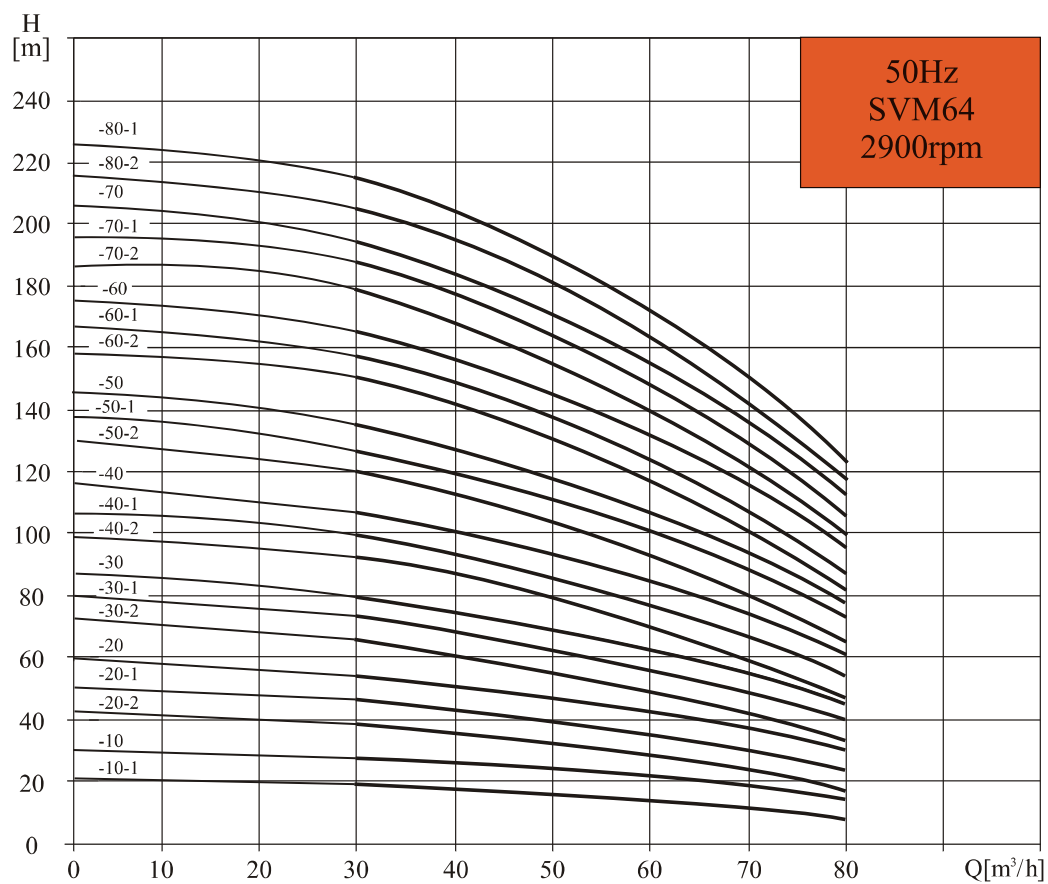


Size & Weight

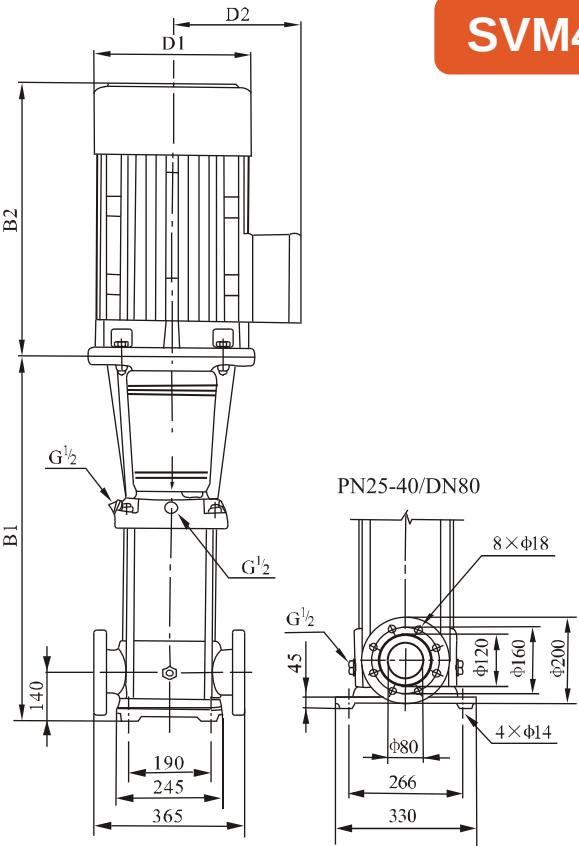

SVM45	Model	Size(mm)					Weight (kg)
		B1	B2	B1+B2	D1	D2	
	SVM45-10-1	561	345/355	906/916	197/230	165/188	83/90
	SVM45-10						
	SVM45-20-2	641	390	1031	260	208	105/110
	SVM45-20						
	SVM45-30-2	721/826	390/500	1111/1326	260/330	208/255	127/183
	SVM45-30						
	SVM45-40-2	906	500	1406	330	255	197
	SVM45-40						
	SVM45-50-2	986	550	1536	330	255	221
	SVM45-50						
	SVM45-60-2	1066	575	1641	360	285	261
	SVM45-60						
	SVM45-70-2	1146	575	1721	360	285	288
	SVM45-70						
	SVM45-80-2	1226	650	1876	400	310	324
	SVM45-80						
	SVM45-90-2	1306	650	1956	400	310	328/352
	SVM45-90						
	SVM45-100-2	1386	650	2036	400	310	355
	SVM45-100						
	SVM45-110-2	1466	685	2151	450	345	426
	SVM45-110						
	SVM45-120-2	1546	685	2231	450	345	432
	SVM45-120						
	SVM45-130-2	1626	685	2311	450	345	438

Installation drawing

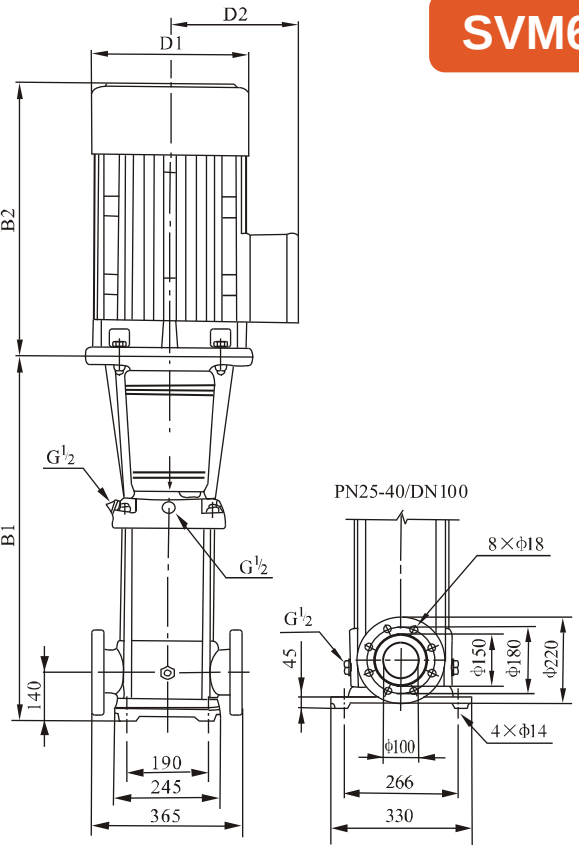

Size & Weight

SVM64	Model	Size(mm)					Weight (kg)
		B1	B2	B1+B2	D1	D2	
	SVM64-10-1	561	355	916	230	188	93
	SVM64-10	561	390	951	260	208	105
	SVM64-20-2	644	390	1034	260	208	110
	SVM64-20-1	754	500	1254	330	255	182
	SVM64-20	754	500	1254	330	255	182
	SVM64-30-2	836	500	1336	330	255	196
	SVM64-30-1	836	500	1336	330	255	197
	SVM64-30	836	550	1386	330	255	221
	SVM64-40-2	919	550	1469	330	255	225
	SVM64-40-1	919	575	1494	360	285	258
	SVM64-40	919	575	1494	360	285	258
	SVM64-50-2	1001	575	1576	360	285	276
	SVM64-50-1	1001	575	1576	360	285	276
	SVM64-50	1001	650	1651	400	310	320
	SVM64-60-2	1084	650	1734	400	310	325
	SVM64-60-1	1084	650	1734	400	310	349
	SVM64-60	1084	650	1734	400	310	349
	SVM64-70-2	1166	650	1816	400	310	353
	SVM64-70-1	1166	650	1816	400	310	353
	SVM64-70	1166	685	1851	460	340	420
	SVM64-80-2	1248	685	1933	460	340	424
	SVM64-80-1	1248	685	1933	460	340	424