Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.


Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

Dimension and Weights
QFN210


50HZ

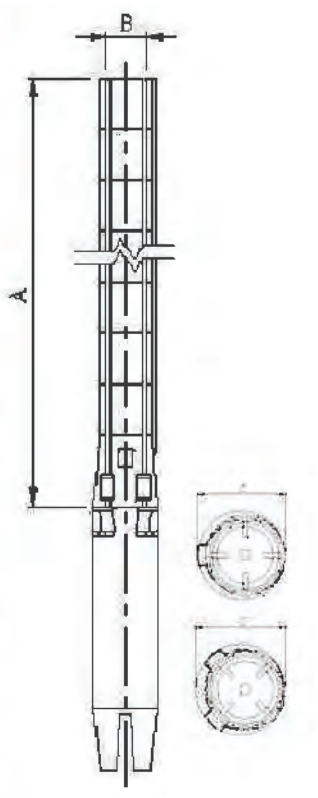

Pump Type	Motor (kw)	Dimensions (mm)			Net Weight (kg)
		B 6” Connection (RP, NPT)			
		A	C*	C**	Pump
QFN210-1A-6”	7.5	652	211	218	29.2
QFN210-1-6”	11	652	211	218	29.26
QFN210-2AA-6”	13	807	211	218	35.64
QFN210-2A-6”	18.5	807	211	218	35.7
QFN210-2-6”	22	807	211	218	35.76
QFN210-3AA-6”	22	963	211	218	42.14
QFN210-3A-6”	26	963	211	218	42.2
QFN210-3-6”	30	963	211	218	42.26
QFN210-3-8”	30	963	213	218	47.06
QFN210-4AA-6”	37	1118	211	218	48.64
QFN210-4AA-8”	37	1118	213	218	51.94
QFN210-4A-6”	37	1118	211	218	48.7
QFN210-4A-8”	37	1118	213	218	52
QFN210-4-6”	37	1118	211	218	48.76
QFN210-4-8”	37	1118	213	218	52
QFN210-5AA-6”	45	1274	211	218	55.14
QFN210-5AA-8”	45	1274	213	218	59.94
QFN210-5A-6”	45	1274	211	218	55.2
QFN210-5A-8”	45	1274	213	218	57
QFN210-5-8”	55	1274	213	218	57.06
C* Maximum diameter of pump with one motor cable					
C** Maximum diameter of pump with two motor cables					

Dimension and Weights
QFN210

50HZ

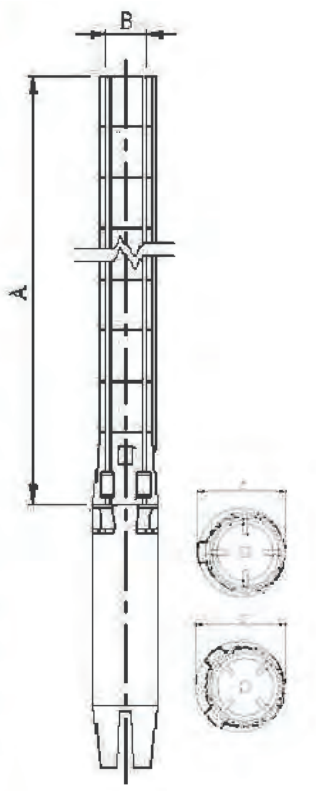

Pump Type	Motor (kw)	Dimensions (mm)			Net Weight (kg)
		B 6" Connection (RP, NPT)			
		A	C*	C**	Pump
QFN210-6AA-8"	55	1429	213	218	61.94
QFN210-6A-8"	55	1429	213	218	62
QFB210-6-8"	63	1429	218	227	62.06
QFN210-7AA-8"	63	1585	218	227	66.94
QFN210-7A-8"	63	1585	218	227	67
QFN210-7-8"	75	1585	218	227	67.06
QFN210-8AA-8"	75	1740	218	227	71.94
QFN210-8A-8"	75	1740	218	227	72
QFN210-8-8"	75	1740	218	227	72.06
QFN210-9AA-8"	93	1896	218	227	76.94
QFN210-9A-8"	93	1896	218	227	77
QFN210-9-8"	93	1896	218	227	77.06
QFN210-10AA-8"	93	2051	218	227	81.94
QFN210-10A-8"	93	2051	218	227	82
QFN210-10-8"	93	2051	218	227	82.06
QFN210-11-8"	110	2207	218	227	87.06
C* Maximum diameter of pump with one motor cable					
C** Maximum diameter of pump with two motor cables					