Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.


Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

Dimension and Weights
QFN270


50HZ

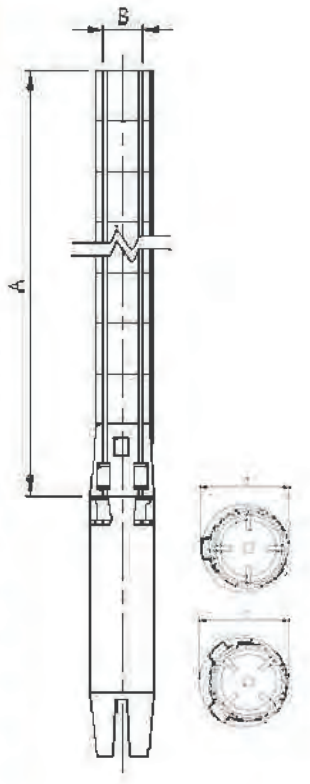

Pump Type	Motor (kw)	Dimensions (mm)			Net Weight (kg)
		B 6" Connection (RP, NPT)			
		A	C*	C**	Pump
QFN270-1A-6"	9.2	652	211	218	30.4
QFN270-1-6"	13	652	211	218	30.4
QFN270-2AA-6"	18.5	807	211	218	36.74
QFN270-2A-6"	22	807	211	218	36.82
QFN270-3-6"	26	807	211	218	36.82
QFN270-3AA-6"	30	963	211	218	43.16
QFN270-3A-6"	37	963	211	218	43.24
QFN270-3-6"	37	963	211	218	43.24
QFN270-4AA-8"	45	1118	218	227	50.9
QFN270-4A-8"	45	1118	218	227	50.98
QFN270-4-8"	55	1118	218	227	50.98
QFN270-5AA-8"	55	1274	218	227	57.32
QFN270-5A-8"	55	1274	218	227	57.4
QFN2705-8"	63	1274	218	227	57.4
QFN270-6AA-8"	63	1429	218	227	63.74
QFN270-6A-8"	75	1429	218	227	63.82
QFN270-6-8"	75	1429	218	227	63.82
C* Maximum diameter of pump with one motor cable					
C** Maximum diameter of pump with two motor cables					

Dimension and Weights
QFN270

50HZ

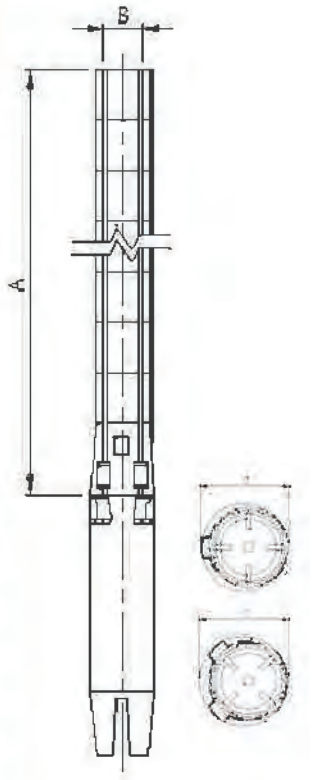

Pump Type	Motor (kw)	Dimensions (mm)			Net Weight (kg)
		B 6" Connection (RP, NPT)			
		A	C*	C**	Pump
QFN270-7AA-8"	75	1585	218	227	70.16
QFN270-7A-8"	92	1585	218	227	70.24
QFN270-7-8"	92	1585	218	227	70.24
QFN-8AA-8"	92	1740	218	227	76.58
QFN270-8A-8"	92	1740	218	227	76.66
QFN270-8-8"	92	1740	218	227	76.66
QFN270-9AA-8"	110	1896	218	227	83
QFN270-9A-8"	110	1896	218	227	83.08
QFN270-9-8"	110	1896	218	227	83.08
QFN270-10AA-8"	110	2051	218	227	89.42
QFN270-10A-8"	132	2181	227	247	102.62
QFN270-10-8"	132	2181	227	247	102.62
QFN270-11-8"	132	2337	227	247	109.04
QFN270-12-8"	147	2492	227	247	115.46
QFN270-13-8"	170	2648	227	247	121.88
QFN270-14-8"	170	2803	227	247	128.3
C* Maximum diameter of pump with one motor cable					
C** Maximum diameter of pump with two motor cables					