





TYPICAL AVERAGE PUMP PERFORMANCE		
TESTED ON WATER AT 20°C		
COLUMN <b>50 mm</b> <b>65 mm</b>	SHAFTS <b>16 mm</b> <b>19 mm</b>	UP TO <b>7.5 kW</b> <b>15 kW</b>
MIN. STARTING TORQUE <b>30 Nm</b>		

**GW0904RCL**

AQUA B

AQUA C

DISCHARGE HEAD

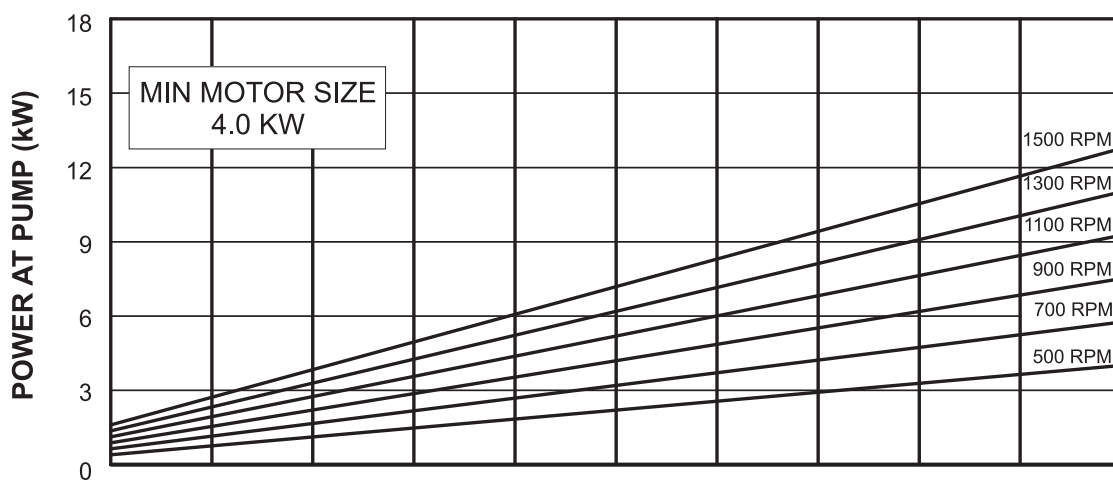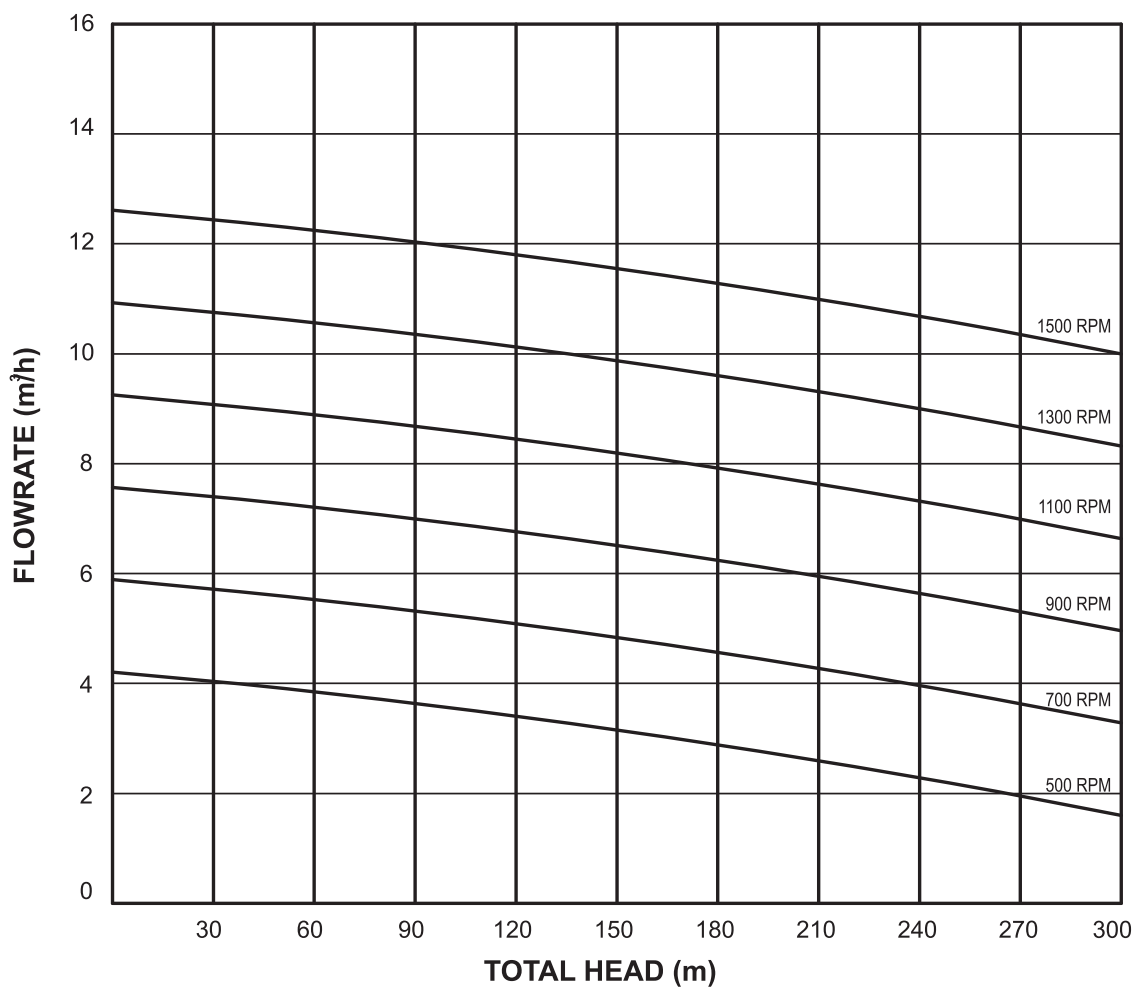

DATE: 07/12/09

CURVE NO. C680

MANUFACTURED BY



Franklin Electric