Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.


Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

Dimension and Weights
QFN125


50HZ

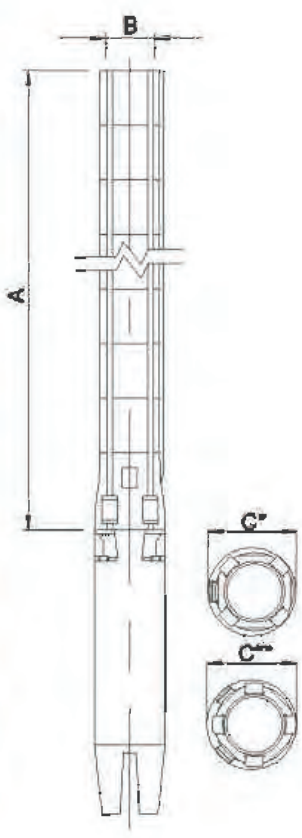

Pump Type	Motor (kw)	Dimensions (mm)					Net Weight (kg)	
		125mm / 5" Connection (RP, NPT)						
		A	B	C	E*	E**	Pump	Motor
QFN125-01-6"	5.5	1232	614	618	178	186	25.1	40
QFN125-02-B-6"	5.5	1360	614	746	178	186	28.7	40
QFN125-02-6"	7.5	1392	646	746	178	186	28.7	42
QFN125-03-B-6"	9.0	1585	711	874	178	186	32.3	45
QFN125-03-6"	11.0	1585	711	874	178	186	32.3	48
QFN125-04-B-6"	13.0	1779	776	1003	178	186	35.9	50
QFN125-04-6"	15.0	1779	776	1003	178	186	35.9	54
QFN125-05-6"	18.5	1972	841	1131	178	186	39.5	65
QFN125-06-6"	22.0	2165	906	1259	178	186	43	70
QFN125-07-6"	30.0	2423	1036	1387	178	186	46.6	90
QFN125-08-B-6"	30.0	2551	1036	1515	178	186	50.2	90
QFN125-08-6"	30.0	2551	1036	1515	178	186	50.2	90
QFN125-09-6"	30.0	2680	1036	1644	178	186	53.8	90
E* Maximum diameter of pump with one motor cable								
E** Maximum diameter of pump with two motor cables								

Dimension and Weights
QFN125

50HZ

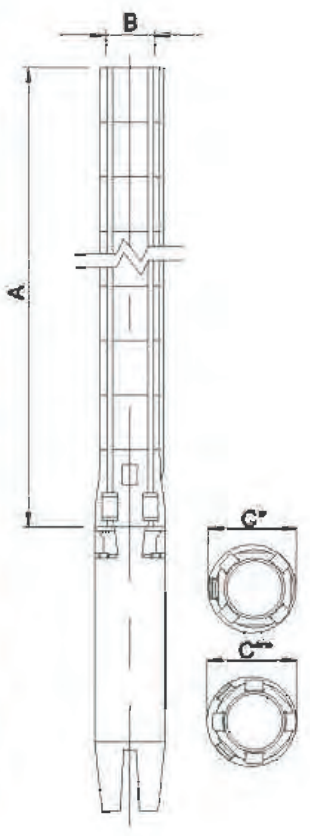

Pump Type	Motor (kw)	Dimensions (mm)					Net Weight (kg)	
		125mm / 5" Connection (RP, NPT)						
		A	B	C	E*	E**	Pump	Motor
QFN125-10-6"	37.0	3177	1405	1772	178	186	54.4	101
QFN125-11-6"	37.0	3305	1405	1900	178	186	61	101
QFN125-12-6"	45.0	3586	1547	2039	178	186	66	148
QFN125-12-8"	45.0	3101	1062	2039	200	204	66	175
QFN125-13-8"	56.0	3372	1204	2168	200	204	69.6	193
QFN125-14-8"	56.0	3504	1204	2300	200	204	73.2	193
QFN125-15-8"	56.0	3628	1204	2424	200	204	76.8	193
QFN125-16-8"	63.0	3946	1394	2552	200	204	80.4	213
QFN125-17-8"	63.0	4079	1394	2685	200	204	84	213
QFN125-18-8"	63.0	4203	1394	2809	200	204	87.6	213
QFN125-19-8"	75.0	4570	1633	2937	200	204	91.2	269
QFN125-20-8"	75.0	4698	1633	3065	200	204	94.8	269
E* Maximum diameter of pump with one motor cable								
E** Maximum diameter of pump with two motor cables								