

SVM45




SVM45




Performance table

Model	Associated motor(kW)	Q (m ³ /h)	25	30	35	40	45	50	55
SVM45-10-1	3.0	H (m)	20	19	18	17	15	13	11
SVM45-10	4.0		24	23	22	21	19	18	16
SVM45-20-2	5.5		40	38	36	33	30	27	23
SVM45-20	7.5		48	46	44	42	39	35	31
SVM45-30-2	9.2		63	61	58	54	50	44	38
SVM45-30	11		71	69	66	63	58	53	47
SVM45-40-2	15		87	84	80	75	69	62	54
SVM45-40	15		95	92	88	84	78	71	62
SVM45-50-2	18.5		111	107	102	96	88	80	69
SVM45-50	18.5		119	115	110	105	97	88	78
SVM45-60-2	22		135	130	124	117	108	97	85
SVM45-60	22		143	138	132	125	116	106	93
SVM45-70-2	26		158	152	146	138	127	115	100
SVM45-70	26		166	161	154	146	135	124	109
SVM45-80-2	30		182	175	168	159	146	133	116
SVM45-80	30		190	184	176	167	154	141	124
SVM45-90-2	30		205	198	190	180	166	150	132
SVM45-90	37		214	207	198	188	174	159	140
SVM45-100-2	37		230	221	212	200	185	168	147
SVM45-100	37		238	230	220	209	193	177	155
SVM45-110-2	45		255	246	236	223	206	188	165
SVM45-110	45		263	255	244	232	214	196	173
SVM45-120-2	45		280	270	259	245	226	206	181
SVM45-120	45		289	280	268	255	236	216	190
SVM45-130-2	45		305	294	282	267	247	225	198

Performance curves

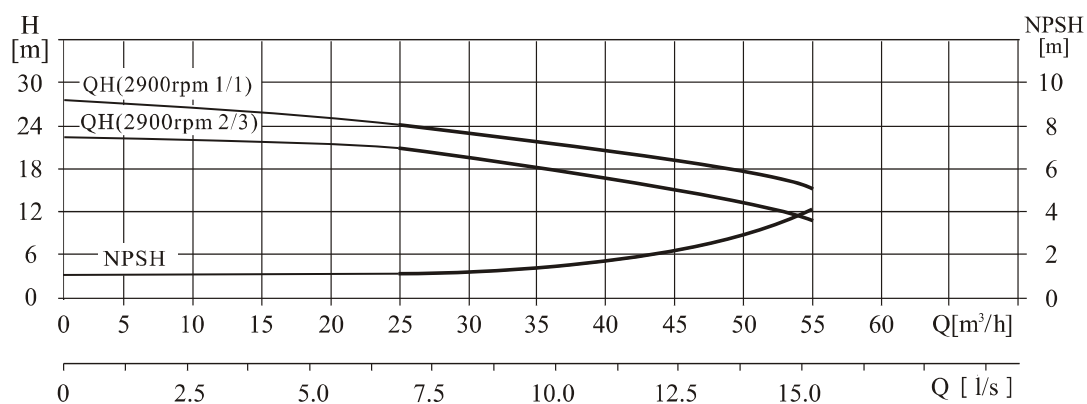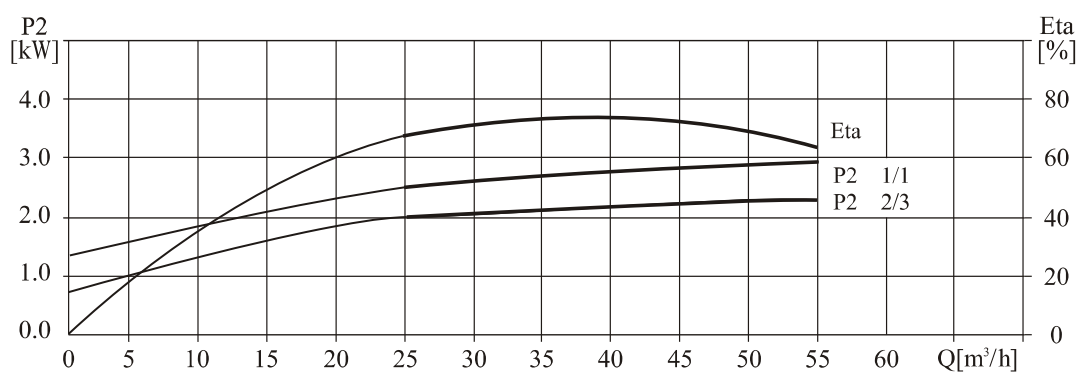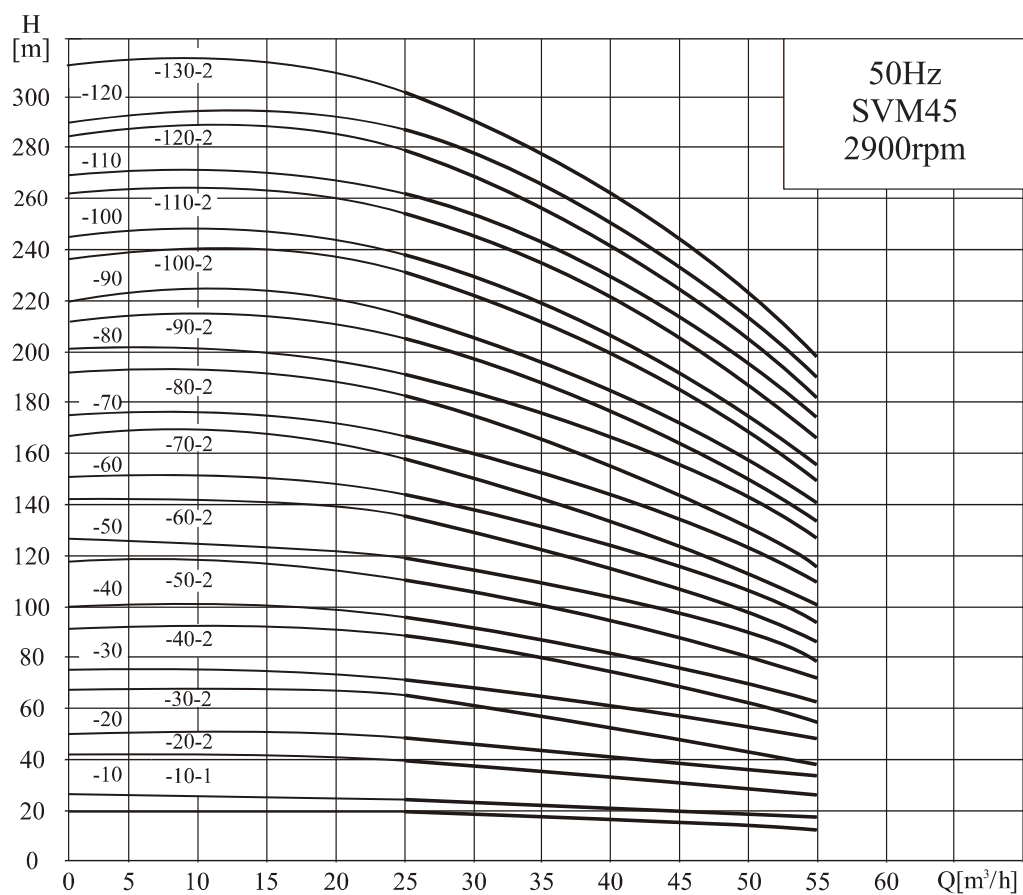

Size & Weight

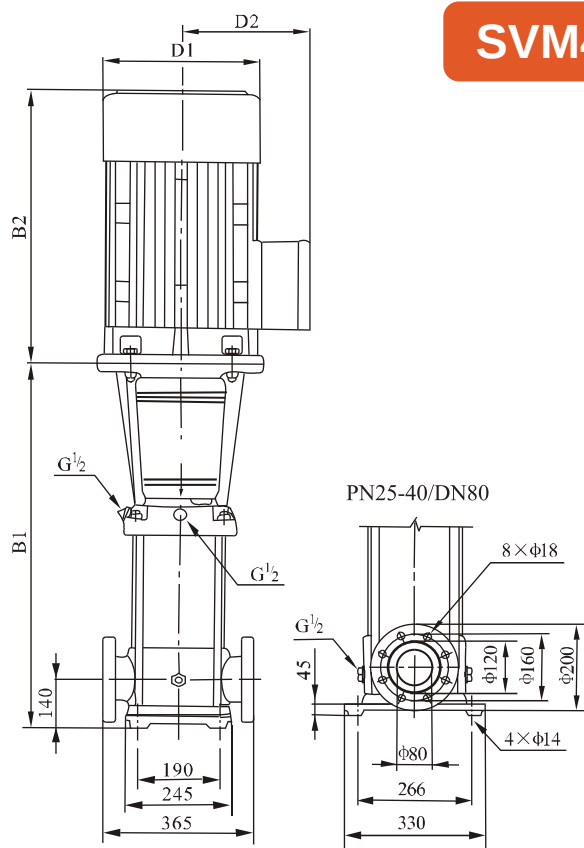

SVM45


Model

Size(mm)

Weight (kg)

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM45-10-1	561	345/355	906/916	197/230	165/188	83/90
SVM45-10						
SVM45-20-2	641	390	1031	260	208	105/110
SVM45-20						
SVM45-30-2	721/826	390/500	1111/1326	260/330	208/255	127/183
SVM45-30						
SVM45-40-2	906	500	1406	330	255	197
SVM45-40						
SVM45-50-2	986	550	1536	330	255	221
SVM45-50						
SVM45-60-2	1066	575	1641	360	285	261
SVM45-60						
SVM45-70-2	1146	575	1721	360	285	288
SVM45-70						
SVM45-80-2	1226	650	1876	400	310	324
SVM45-80						
SVM45-90-2	1306	650	1956	400	310	328/352
SVM45-90						
SVM45-100-2	1386	650	2036	400	310	355
SVM45-100						
SVM45-110-2	1466	685	2151	450	345	426
SVM45-110						
SVM45-120-2	1546	685	2231	450	345	432
SVM45-120						
SVM45-130-2	1626	685	2311	450	345	438

Installation drawing

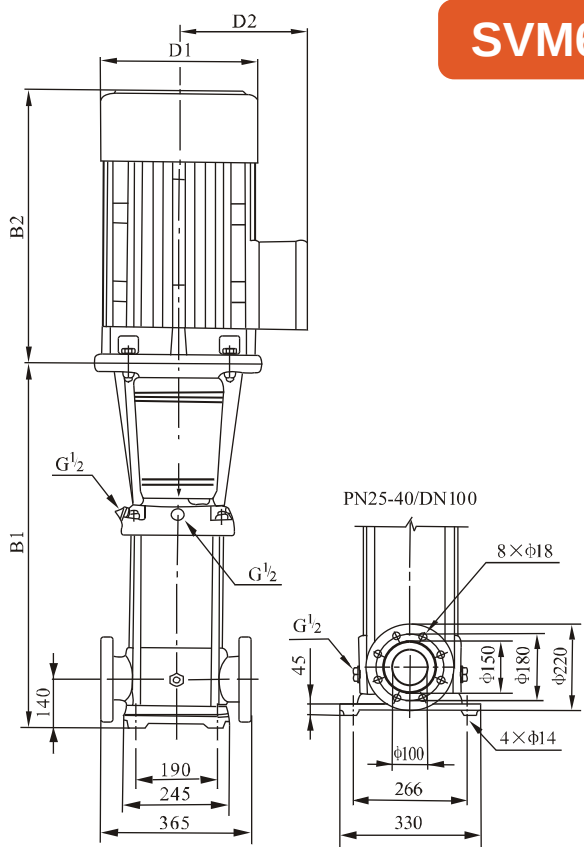

SVM64

Model

Size(mm)

Weight (kg)

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM64-10-1	561	355	916	230	188	93
SVM64-10	561	390	951	260	208	105
SVM64-20-2	644	390	1034	260	208	110
SVM64-20-1	754	500	1254	330	255	182
SVM64-20	754	500	1254	330	255	182
SVM64-30-2	836	500	1336	330	255	196
SVM64-30-1	836	500	1336	330	255	197
SVM64-30	836	550	1386	330	255	221
SVM64-40-2	919	550	1469	330	255	225
SVM64-40-1	919	575	1494	360	285	258
SVM64-40	919	575	1494	360	285	258
SVM64-50-2	1001	575	1576	360	285	276
SVM64-50-1	1001	575	1576	360	285	276
SVM64-50	1001	650	1651	400	310	320
SVM64-60-2	1084	650	1734	400	310	325
SVM64-60-1	1084	650	1734	400	310	349
SVM64-60	1084	650	1734	400	310	349
SVM64-70-2	1166	650	1816	400	310	353
SVM64-70-1	1166	650	1816	400	310	353
SVM64-70	1166	685	1851	460	340	420
SVM64-80-2	1248	685	1933	460	340	424
SVM64-80-1	1248	685	1933	460	340	424