PMC

BOOSTER SYSTEM




PMC - BOOSTER System

Energy Saving: 30% - 50%
Energy Consumption: 30% Down
Max. Suction Distance: 9m




- Multi-Protection
- Permanent Magnet Motor
- Integrated Design
- Constant Pressure
- LCD Display
- Adjustible Pressure
- High Flow Rate
- Energy Saving
- Wider Range of Voltage
- Low Noise


Performance Range

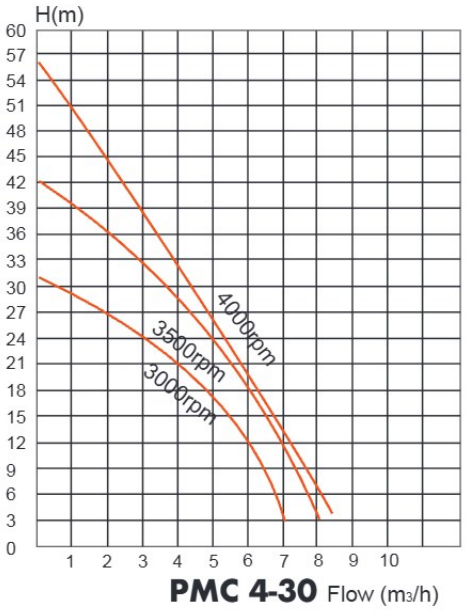

PMC 4-30

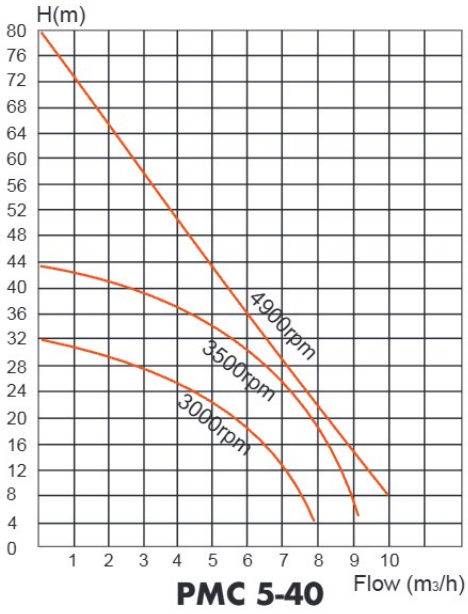

PMC 5-40

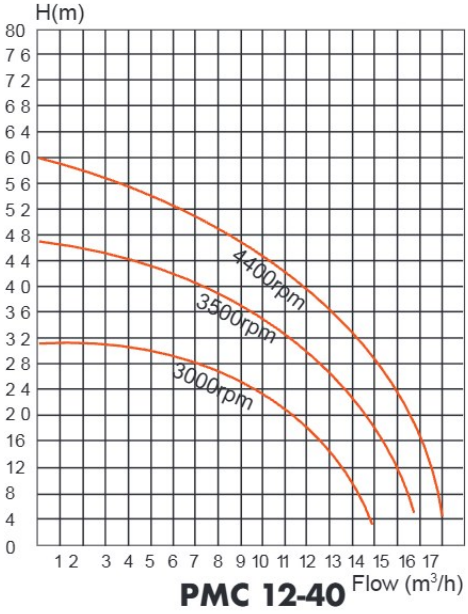

PMC 12-40

Technical Data

Model	Power Range (Kw)	Max. Head (m)	Rated Head (m)	Max. Flow (m3/h)	Rated Flow (m3/h)	Max. Speed (rpm)	Voltage (v)	Frequency (Hz)	Inlet&Outlet (inch)
PMC4-30	0.9Kw	56	30	8,5	4	4000	220+20%	50/60	1 1/4" 1"
PMC5-40	1.1Kw	80	40	10	5	4900	220+20%	50/60	1 1/4" 1"
PMC12-40	2.2Kw	60	40	18	12	4400	220+20%	50/60	2"/2"