


SPP100CF DRAINAGE PUMP

CW FLOAT SWITCH

Performance Chart

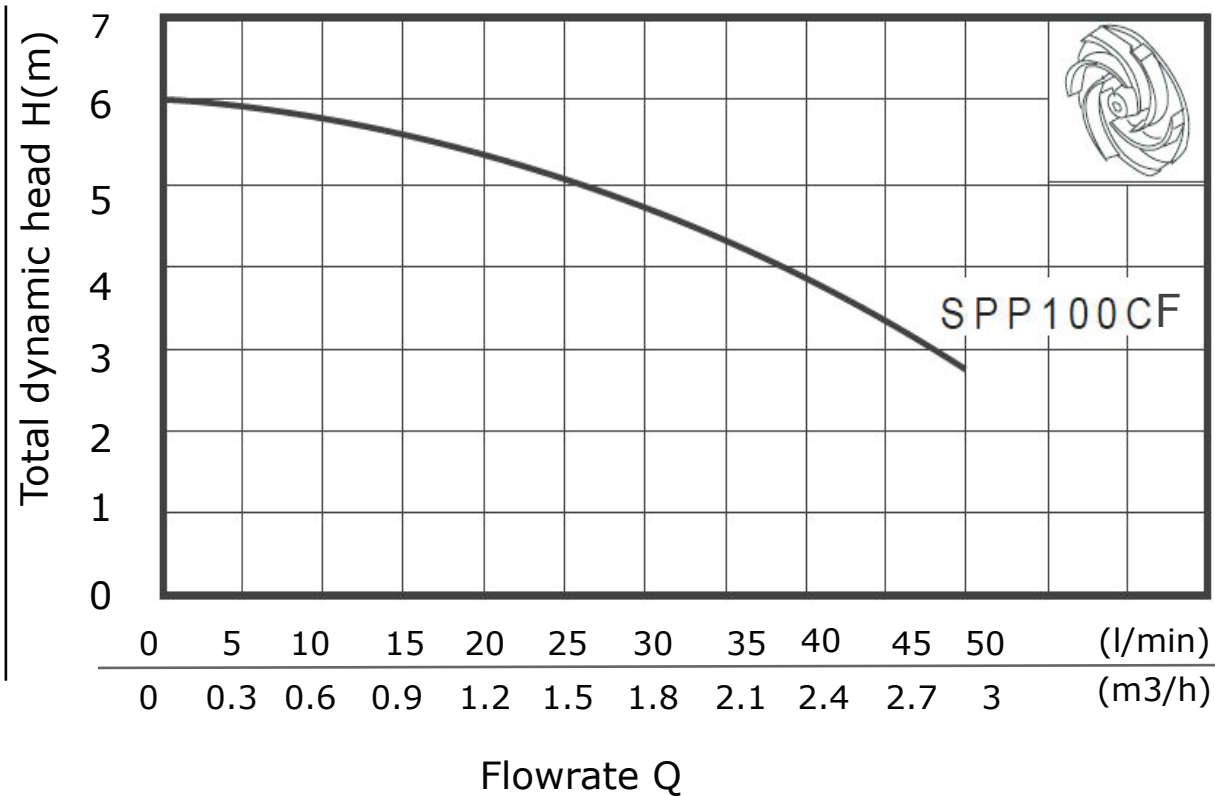

Performance Table

Model	Power (kW)	Outlet Diameter (mm)	Voltage/Frequency (V/HZ)	Max. Flow (l/min)	Max. Head (m)	G.W. (kg)
SPP-100CF	0.1	15,20,25	220/50	50	6	4.3



Application

- Small electrical irrigation and drainage equipment
- Particularly applied in urban well water pumping
- Field irrigation and drainage
- Garden irrigation and household water supply

Pump

- Max. immersion depth: 3 m
- Max. liquid temperature: 40 C
- Liquid pH value: 6.5-8
- Max particals 0.2mm

Motor

- Copper winding
- Built-in thermal protector
- Stainless steel welded shaft
- Insulation Class: B
- Protection Class: IPX8