


TYPICAL AVERAGE PUMP PERFORMANCE	
TESTED ON WATER AT 20 °C	
INLET/OUTLET	Ø 40 (1½")
MAX. DIFF. HEAD	300 m
MIN. STARTING TORQUE	30 Nm
\sim	

HD20H

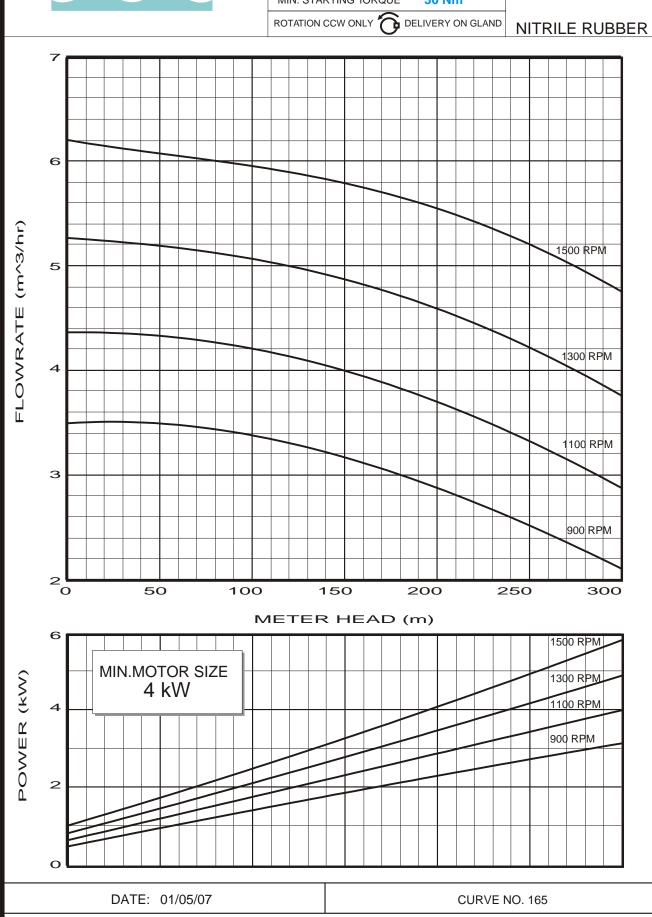

MANUFACTURED BY Franklin Electric