


# WSD SUBMERSIBLE RANGE

## Performance Curve

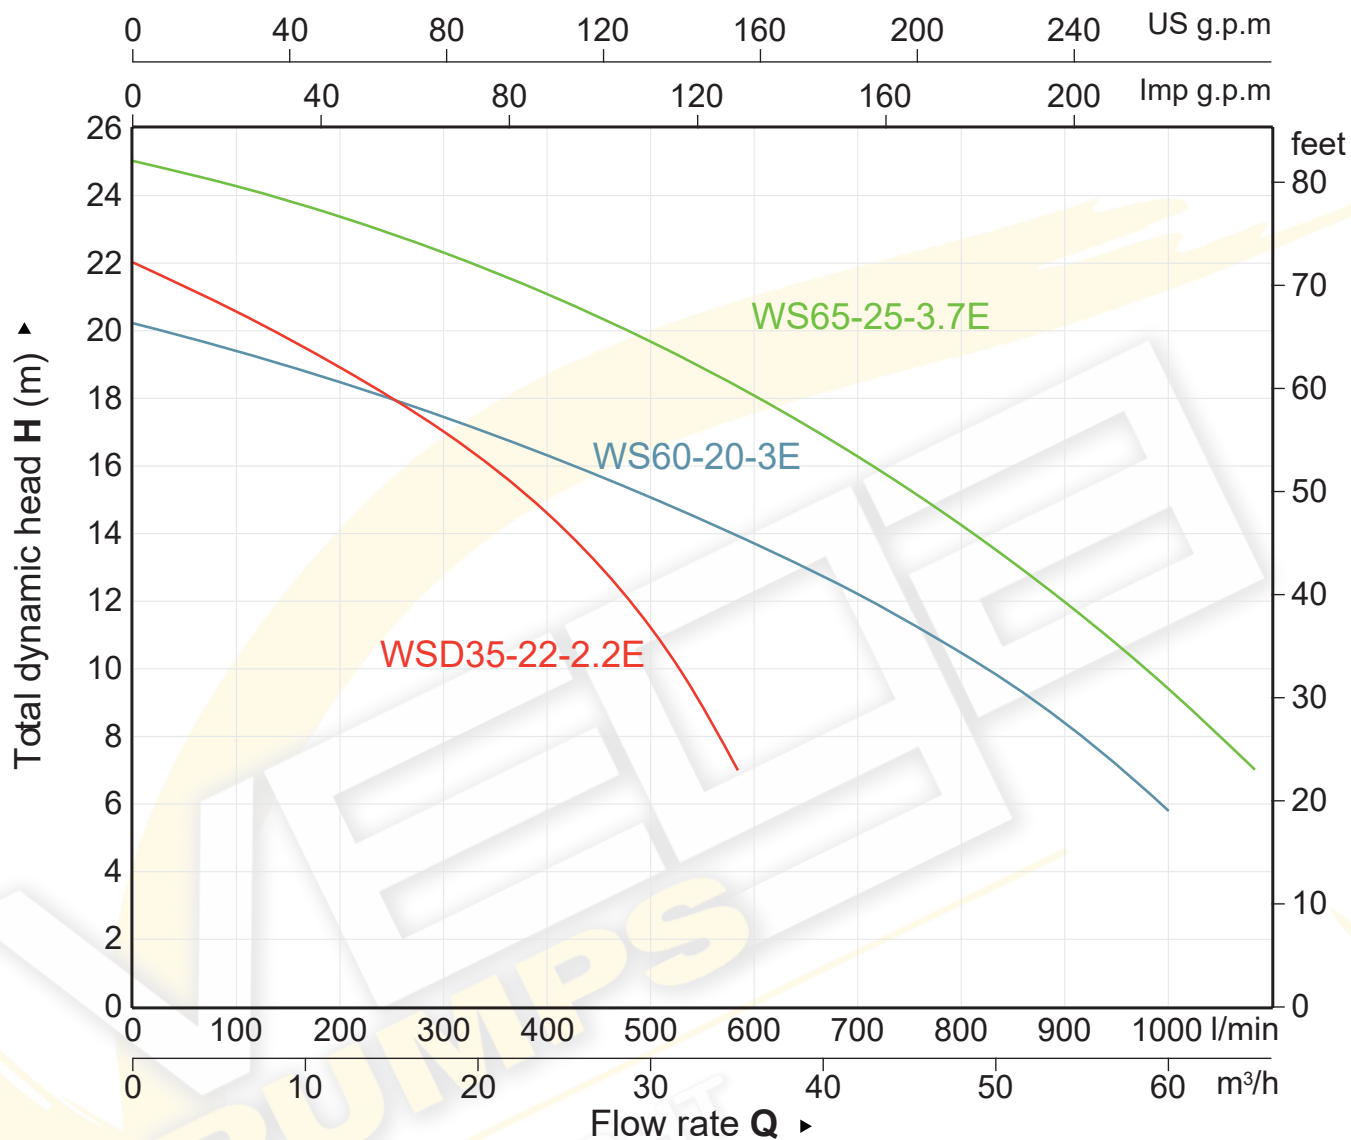

MODEL		P <sub>2</sub>		DELIVERY				
1~ 220 - 240V	3~ 380 - 415V	kW	HP	m <sup>3</sup> /h	0	3	6	9
				l/min	0	50	100	150
WSD8-7-0.18C	WS8-7-0.18C	0.18	0.25	HEAD (m)	7.1	6.0	3.8	
WSD9-8-0.25C	WS9-8-0.25C	0.25	0.33		8.0	7.0	5.0	3.0

MODEL		P <sub>2</sub>		DELIVERY															
1~ 220 - 240V	3~ 380 - 415V	kW	HP	m <sup>3</sup> /h	0	5	10	15	20	25	30	35	40	45	50	55	60	65	
				l/min	0	83	167	250	333	417	500	583	667	750	833	917	1000	1083	
WSD20-12-0.55E	WS20-12-0.55E	0.55	0.75	HEAD (M)	12.1	10.7	9.7	7.8	5.3										
WSD20-15-0.75E	WS20-15-0.75E	0.75	1		15.5	13.1	12.4	10.5	8.2										
WSD25-15-1.1E	WS25-15-1.1E	1.1	1.5		15.1	13.5	12.7	11.1	9.1	6.6									
WSD28-18-1.5E	WS28-18-1.5E	1.5	2		18.2	16.4	15.3	13.4	11	7.7									
WSD35-22-2.2E	WS35-22-2.2E	2.2	3		22.0	20.3	19.5	18	16.3	14	10.9	7.2							
-	WS60-20-3E	3	4		20.2	19.5	18.7	17.9	17	16.1	15	13.9	12.7	11.3	9.8	8	5.8		
-	WS65-25-3.7E	3.7	5		25.0	24.4	23.6	22.8	21.9	20.8	19.7	18.4	16.9	15.3	13.5	11.5	9.4	7	