



Application

- Wastewater drainage in factories, construction sites and commercial facilities
- Drainage system in municipal sewage treatment plants
- Drainage station in residential quarters
- Municipal projects
- Methane pools and field irrigation in countryside

Pump


- Max. immersion depth: 10 m
- 0.25-4kw, Standard PN6 pump body with hose coupling
- 5.5-7.5kw, Standard PN6 pump body with hose coupling, optional PN10 pump body, without hose coupling
- 11-22kW, Standard PN10 pump body, without hose coupling, optional PN6 pump body with hose coupling
- Can be equipped with hose connection can choose flange connection
- Cable Length: 10m (under 30kW), 8m (30-45kW)
- Max. liquid temperature: up to +40℃
- Liquid PH value: 4 - 10
- Max.liquid density: 1.3x10³ kg/m³
- Allowed by the particle diameter: 20 - 80 mm
- Single phase optional

Motor

- Copper winding
- Insulation class: F
- Enclosures class: IP68
- Motor protection: 0.25 - 4kW(5.5kW and above need control cabinet)
- 0.25-4kW: Star connection; 5.5-37kW: Delta connection; 45kW: Star-triangle connection


Identification Codes

65 WQ D 15-10-1.1(M)(A)/(4)

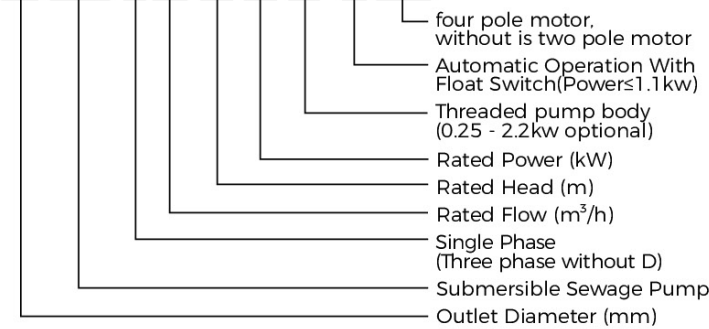

Material Table

No.	Part	Material	No.	Part	Material
01	Cable		12	Bearing	
02	Handle	AISI304	13	Oil Chamber	HT200
03	Top Cover	HT200	14	Mechanical Seal	
04	O-Ring	NBR	15	Pressing	AISI304
05	End Cover	HT200	16	O-Ring	NBR
06	O-Ring	NBR	17	Cylinder Head	HT200
07	Wave Spring Washer	65Mn	18	Oil Seal	
08	Bearing		19	Impeller	HT200
09	Rotor		20	Pump Body	HT200
10	Stator		21	Base	HT200
11	Motor Casing	HT200			

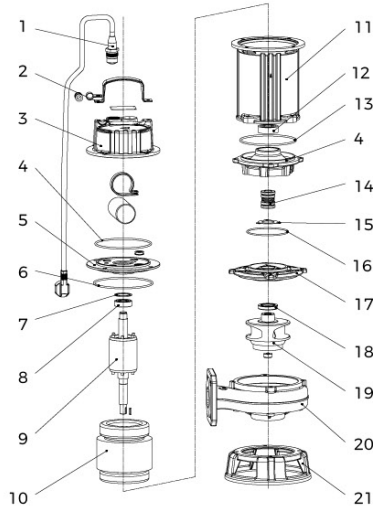


0.25 - 4 kW

Material Table

No.	Part	Material
01	Pedestal	HT200
02	Pump body	HT200
03	Air vent valve	
04	Washer	AISI304
05	Impeller	HT200
06	Casket seal	NBR
07	Cylinder Head	HT200
08	Mechanical seals	
09	Oil chamber	HT200
10	Ball bearing	
11	Cable assembly	
12	Rings	
13	Top cover	HT200
14	End cover	HT200


No.	Part	Material
15	Winding	
16	Mechine barrel	HT200
17	Ball bearing	
18	Motor	

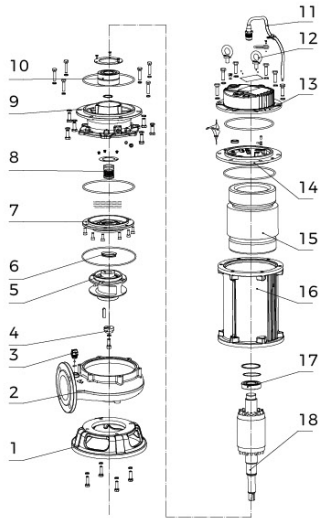

5.5 - 7.5 kW

No.	Part	Material
01	Pump base	HT200
02	Pump body	HT200/HT250/QT400
03	Impeller ring	45
04	Impeller	HT200/HT250/QT400
05	O-ring	NBR
06	Mechanical seal	Silicon/Carbon
07	Pump cover	HT200
08	O-ring	NBR
09	Mechanical seal	Silicon/Carbon
10	Oil chamber	HT200
11	O-ring	NBR
12	Float switch (optional)	AISI304
13	Oil-water probe (optional)	AISI304
14	Motor base	HT200
15	Handle components	Q235
16	Cable assembly	YCW
17	Cable clamp	HT200

No.	Part	Material
18	Signal line (optional)	YCW
19	Nameplate	AISI304
20	Top cover	HT200
21	O-ring	NBR
22	Water leakage protection(optional)	
23	Wiring base	
24	Upper cover	HT200
25	O-ring	NBR
26	Wave spring	65Mn
27	Ball bearing	
28	Rotor	
29	Bearing	
30	Snap ring	65Mn
31	Temperature sensor(optional)	
32	Stator	

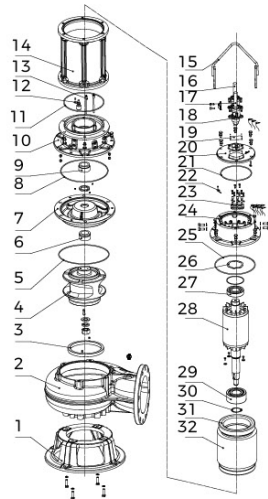

11 - 45 kW