Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.


Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

Dimension and Weights
QFN100

50HZ

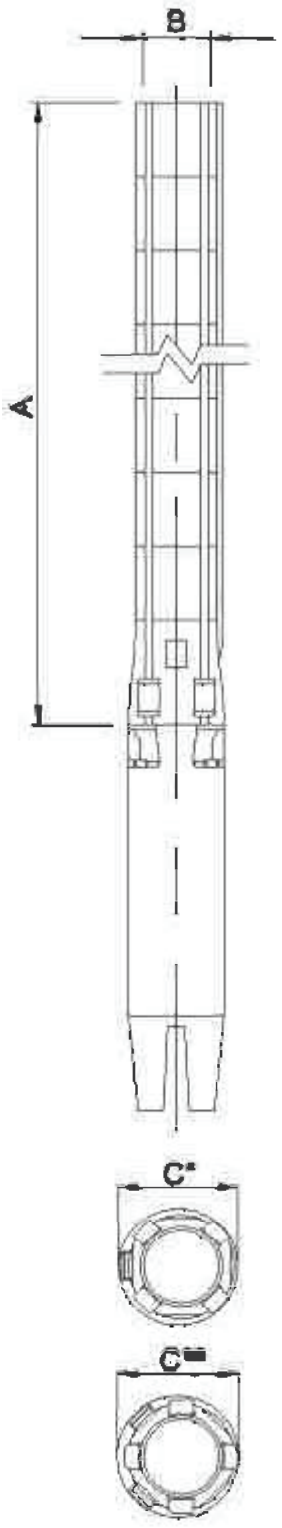

Pump Type	Motor (kw)	Dimensions (mm)						Net Weight (kg)	
		A	B	C	D	E*	E**	Pump	Motor
QFN100-02-A-4”	3.7	1059	563	496		146		9.2	25
QFN100-02-4”	4.0	1059	563	496		146		9.2	25
QFN100-03-4”	5.5	1286	677	609		146		11.5	27
QFN100-03-6”	5.5	1223	614	609		149		11.5	40
QFN100-04-4”	7.5	1497	775	722		146		13.7	30
QFN100-04-6”	7.5	1368	646	722	NPT/TP	149	152	13.7	40
QFN100-05-6”	9.0	1546	711	835	100mm	149	152	16	45
QFN100-06-6”	11.0	1659	711	948	4”	149	152	18.3	48
QFN100-07-6”	13.0	1837	776	1061		149	152	20.6	50
QFN100-08-6”	15.0	1950	776	1174		149	152	22.9	54
QFN100-09-6”	18.5	2128	841	1287		149	152	25.1	65
QFN100-10-6”	18.5	2241	841	1400		149	152	27.4	65
QFN100-11-6”	22.0	2419	906	1513		149	152	29.7	70
QFN100-12-6”	22.0	2532	906	1626		149	152	32	70
QFN100-13-6”	30.0	2775	1036	1739		149	152	34.3	90
QFN100-14-6”	30.0	2888	1036	1852		149	152	36.5	90
QFN100-15-6”	30.0	3001	1036	1965		149	152	38.8	90
QFN100-16-6”	30.0	3114	1036	2078		149	152	41.1	90
QFN100-17-6”	37.0	3596	1405	2191		149	152	43.4	101
QFN100-18-6”	37.0	3709	1405	2304		149	152	45.7	101
QFN100-20-6”	37.0	3935	1405	2530		149	152	50.2	101
QFN100-21-6”	45.0	4190	1457	2643		149	152	52.5	148

E* Maximum diameter of pump with two motor cables

E** Maximum diameter of pump with one motor cable