


LKJ-PAE

PRESSURE BOOSTER

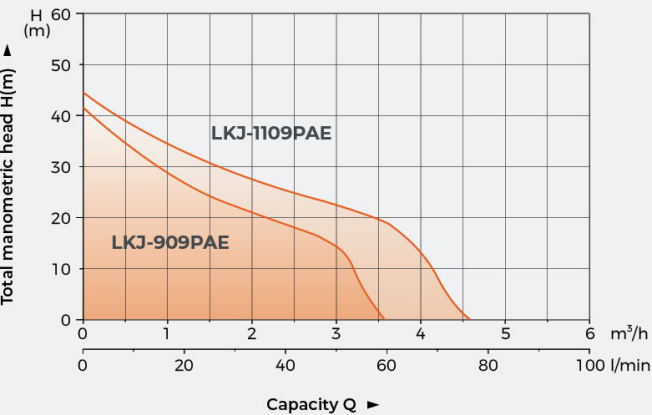


Features

- Self-priming booster for the supply of water in domestic applications.(gardening and pressurisation)
- Automatic switching on and off according to demand
- Compact, light, robust and easy to use
- Equipped with pre-filter for extended pump life
- The pressure tank configuration will bring a better user experience

Model	LKJ-909PAE	LKJ-1109PAE
Rated Power	900 W	1100 W
Max. Head	42 m	46 m
Max. Flow	3.6 m³/h	4.6 m³/h
Max. Suction Depth	8 m	8 m
Start Pressure	1.4 bar	1.4 bar
Stop Pressure	2.8 bar	2.8 bar
Tank	24 L	24 L
Outlet/Inlet	1"x1"	1"x1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C
Package Dimension	550x340x695 mm	550x340x695 mm
Package Gross Weight	17.9 kg	18.3 kg
Qty/20'GP	204	204

XCm-PS(-2)

MULTISTAGE CENTRIFUGAL PUMP

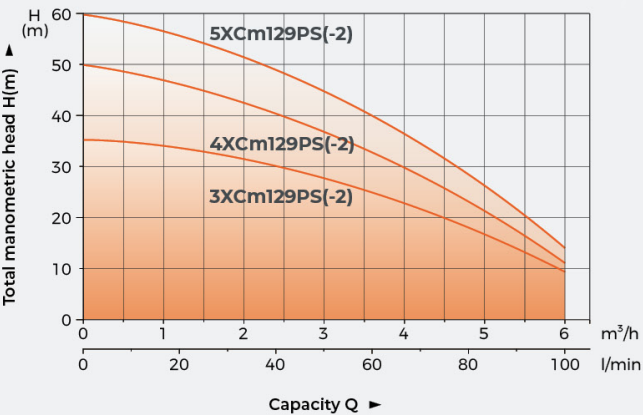

Features

- Multi-stage, self priming centrifugal pump with horizontal shaft, with excellent suction capacity even in the presence of air bubbles, featuring extremely quiet operation suitable for domestic water supply and pressurisation, irrigation of gardens and general water movement.
- Reliable sealing system: mechanical seal+lip seal
- With stainless steel shaft
- Motor with thermal protector.

Model	3XCm129PS(-2)	4XCm129PS(-2)	5XCm129PS(-2)
Rated Power	900 W	1100 W	1300 W
Max. Head	35 m	50 m	60 m
Max. Flow	5.0 m³/h	5.4 m³/h	5.4 m³/h
Max. Suction Depth	8 m	8 m	8 m
Impellers	3	4	5
Outlet/Inlet	1"x1"	1"x1"	1"x1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C
Package Dimension	462x235x240 mm (-2: 438x241x267 mm)	487x235x240 mm (-2: 460x267x241 mm)	507x235x240 mm (-2: 482x241x267 mm)
Package Gross Weight	10.28 Kg (-2: 10.43 Kg)	11.61 Kg (-2: 11.82 Kg)	12.88 Kg (-2: 13 Kg)
Qty/20'GP	972	927	891