


TK32

Performance data

Model	Power		Q (m ³ /h)	2	4	6	8	10	12.5	14	16
	kW	HP									
TK32-18/2	1.1	1.5	H (m)	19.3	19.1	18.7	18.0	16.7	14.3		
TK32-21/2	1.5	2.0		24.4	24.2	23.9	23.3	22.5	21.0	19.4	15.8
TK32-25/2	2.2	3		28.2	28.2	28.0	27.5	26.7	25.0	23.6	20.6
TK32-32/2	3	4		34.2	34.2	33.9	33.6	33.1	32.0	30.8	28.1
TK32-38/2	4	5.5		39.7	39.8	39.7	39.4	39.0	38.0	37.0	35.1
TK32-50/2	5.5	7.5		51.6	51.6	51.4	51.1	50.7	50.0	49.3	47.9

Installation dimensions & weight

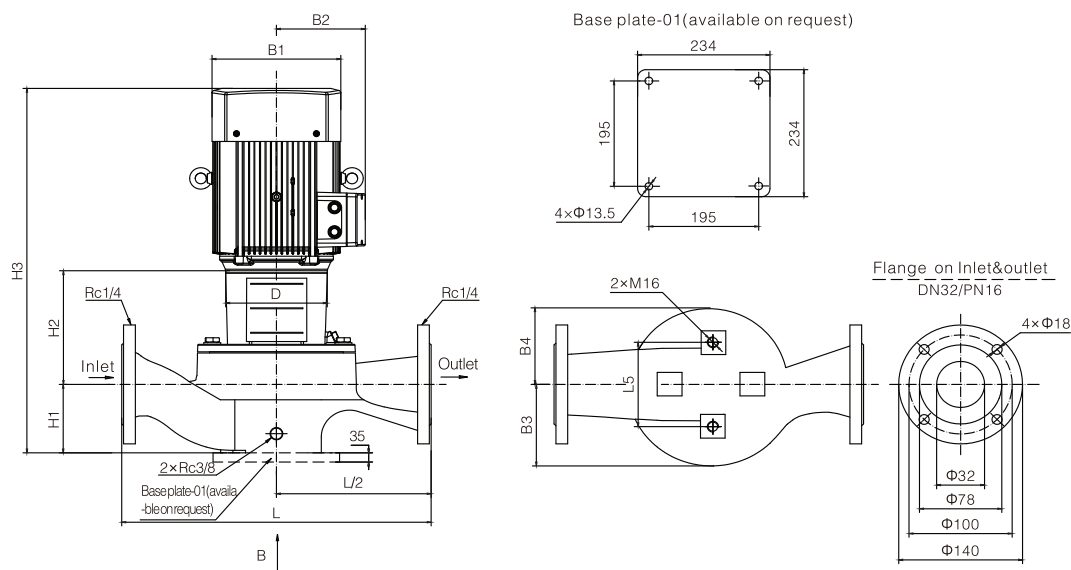

Model	Dimensions (mm)											Weight (kg)
	D	B1	B2	B3	B4	B5	H1	H2	H3	L1	L2	
TK32-18/2	120	170	142	124	116	144	100	189	540	340	170	36
TK32-21/2	140	190	155	124	116	144	100	199	592	340	170	40
TK32-25/2	140	190	155	124	116	144	100	199	592	340	170	42
TK32-32/2	160	197	165	124	116	144	100	205	619	340	170	48
TK32-38/2	160	230	188	142	142	144	100	207	642	440	220	64
TK32-50/2	200	260	208	142	142	144	100	227	737	440	220	85

Performance curves

