


TK40

Performance data

Model	Power		Q (m ³ /h)	4	8	12.5	16	20	25	28	32
	kW	HP									
TK40-16/2	1.1	1.5	H (m)	17.7	17.3	16.0	12.5				
TK40-20/2	1.5	2.0		21.4	21.1	20.0	17.2				
TK40-18/2	2.2	3		19.8	19.8	19.5	19	18.0	15.8		
TK40-25/2	3	4		27.6	27.5	27.1	26.4	25.0	22.5		
TK40-30/2	4	5.5		33.7	33.6	33.1	32.6	31.7	30.0	28.6	26.0
TK40-36/2	5.5	7.5		38.9	38.8	38.5	38.1	37.3	36.0	35.0	32.5
TK40-48/2	7.5	10		49.7	49.7	49.5	49.4	49.0	48.0	46.6	44.1

Installation dimensions & weight

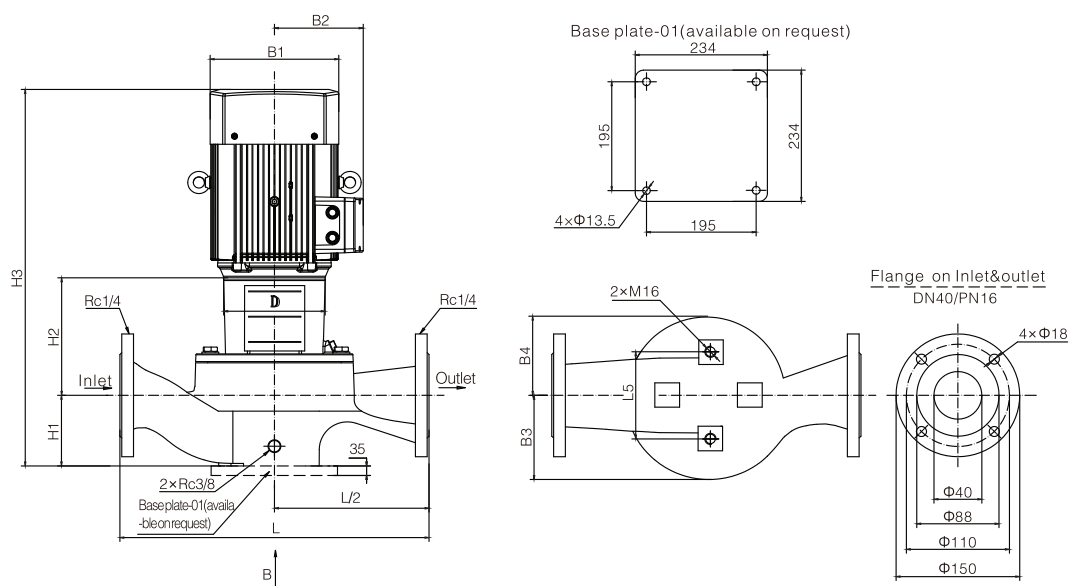

Model	Dimensions (mm)										Weight (kg)
	D	B1	B2	B3	B4	B5	H1	H2	H3	L	
TK40-16/2	120	170	142	96	95	120	68	178	497	320	31
TK40-20/2	140	190	155	96	95	120	68	188	549	320	36
TK40-18/2	140	190	155	109	94	144	100	195	588	340	40
TK40-25/2	160	197	165	126	114	144	100	207	621	340	52
TK40-30/2	160	230	188	126	114	144	100	207	642	340	62
TK40-36/2	200	260	208	136	123	144	110	227	747	440	86
TK40-48/2	200	260	208	136	123	144	110	227	747	440	95

Performance curves

