
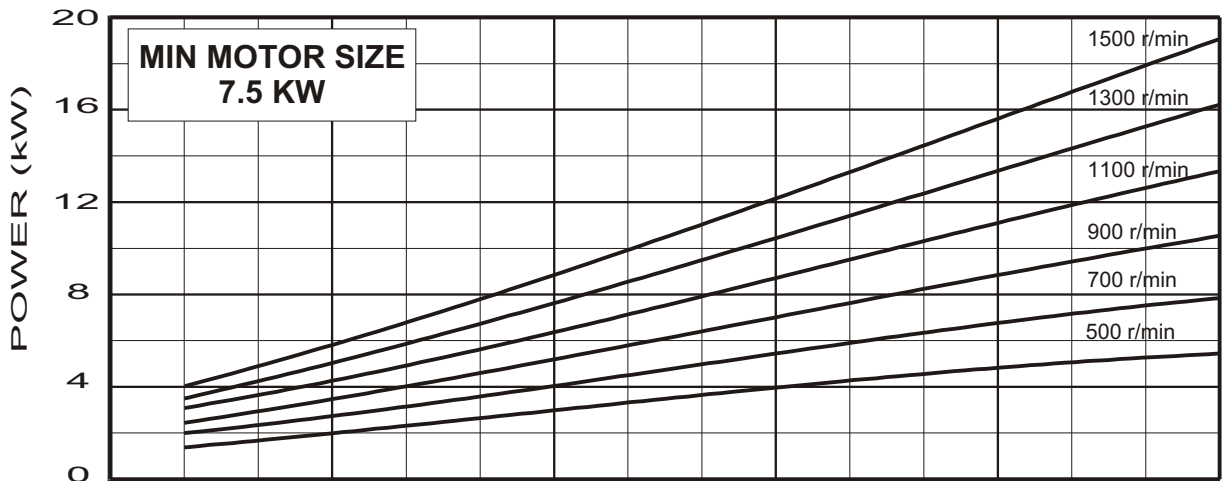
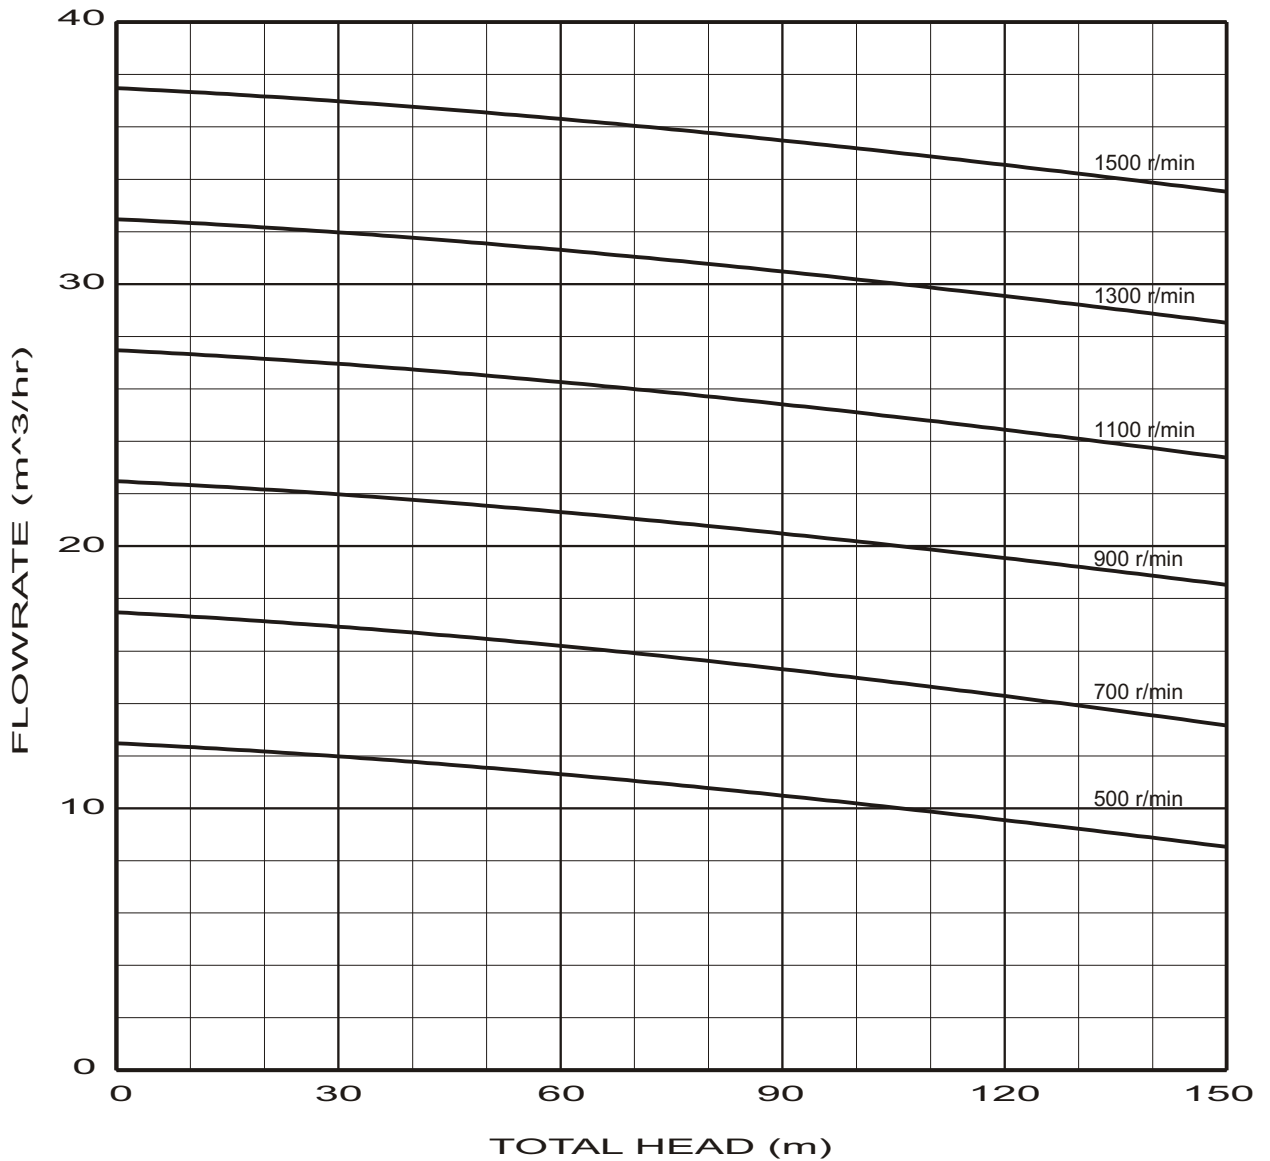




TYPICAL AVERAGE PUMP PERFORMANCE	
TESTED ON WATER AT 20 °C	
INLET/OUTLET	80 mm BS 4504 / 16
MAX. DIFF. HEAD	150 m
MIN. STARTING TORQUE	50 Nm
ROTATION CCW ONLY  DELIVERY ON GLAND	

**PP 2402**



DATE 01/06/06

CURVE NO. C440