


EKJ-P

GARDEN PUMP



EKJ-602P / EKJ-802P

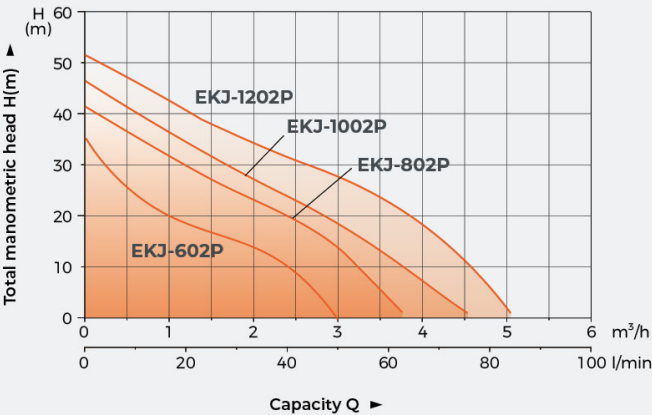

EKJ-1002P / EKJ-1202P


Features

Self-priming garden pump, also suitable for the pressurization of water in domestic applications.
Compact, robust and easy to use.
Motor with thermal protector
Equipped with engineering plastic pump body

Model	EKJ-602P	EKJ-802P	EKJ-1002P	EKJ-1202P
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m³/h	3.7 m³/h	4.5 m³/h	5.0 m³/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Outlet/Inlet	1"x1"	1"x1"	1"x1"	1"x1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	365x225x225 mm	365x225x225 mm	410x250x250 mm	410x250x250 mm
Package Gross Weight	6.5 kg	7.4 kg	9 kg	10 kg
Qty/20'GP	1500	1500	960	960

EKJ-I

GARDEN PUMP

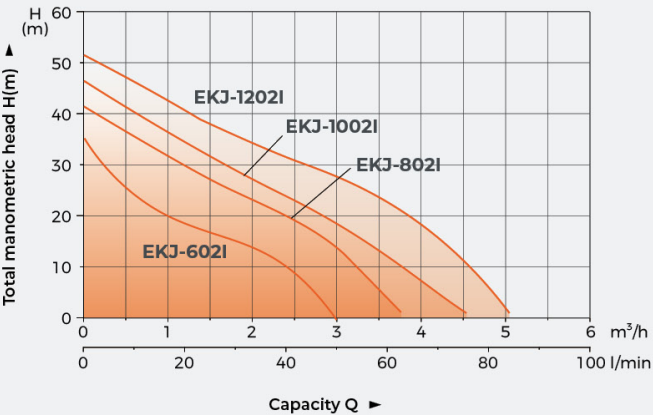

EKJ-602I / EKJ-802I



EKJ-1002I / EKJ-1202I

Features

Self-priming garden pump, also suitable for the pressurization of water in domestic applications.
Compact, robust and easy to use.
Motor with thermal protector
Equipped with cast iron pump body

Model	EKJ-602I	EKJ-802I	EKJ-1002I	EKJ-1202I
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m³/h	3.7 m³/h	4.5 m³/h	5.0 m³/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Outlet/Inlet	1"x1"	1"x1"	1"x1"	1"x1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	350x210x210 mm	350x210x210 mm	410x250x250 mm	410x250x250 mm
Package Gross Weight	8.5 kg	9.4 kg	11.8 kg	12.8 kg
Qty/20'GP	1720	1720	960	960