


Data sheet : Wilo- Multivert MVI 203 (1~230 V, FKM, PN 25)


Pump curves

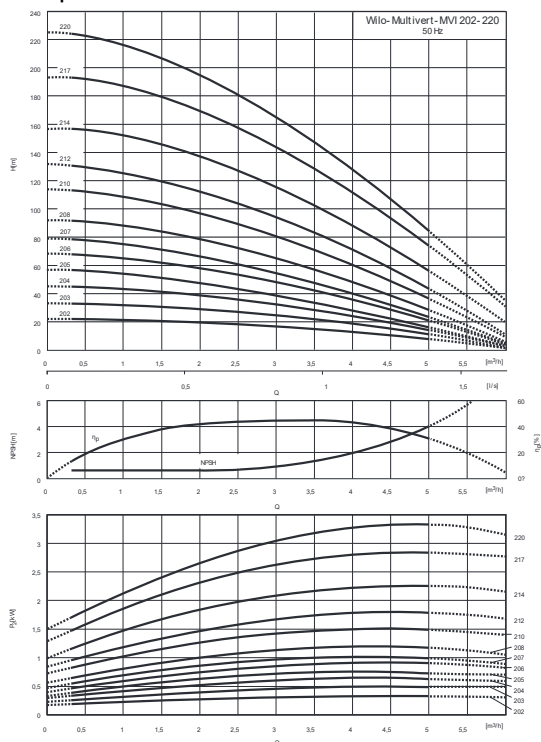

Pump curves in accordance with ISO 9906, class 2


Terminal diagram

Single- phase current



Terminal diagram

Single- phase current at wrong direction of rotation



Power

Fluid temperature	T	- 15...+90 °C
Max. ambient temperature	T	40 °C
Maximum operating pressure	p_{max}	25 bar

Minimum Efficiency Index (MEI)

Minimum Efficiency Index (MEI)	≥ 0.40
--------------------------------	-------------

Motor

Insulation class	F	
Protection class	IP55	
Mains connection	1~230 V, 50 Hz	
Nominal motor power	P_2	0.55 kW
Power consumption	P_1	0.79 kW
Nominal current 1~230 V, 50 Hz	I_N	3.6 A
Motor efficiency	$\eta_{m, 100\%}$	72.0 %

Connections

Flange nominal diameter (on the pressure side)	DN 25	
Flange nominal diameter (on the suction side)	DN 25	
Rated pressure level (on the pressure side)	P_N	PN 16
Rated pressure level (on the suction side)	P_N	PN 16

Materials

Impeller	1.4404 [AISI316L]
Pump housing	1.4404 [AISI316L]
Pump shaft	1.4404 [AISI316L]
Static seal	FKM
Mechanical seal	Q1BVG

Information for order placements

Make	Wilo	
Type	MVI 203	
Art no.	4019096	
Weight approx.	m	19.6 kg

• = available, - = not available