Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.


Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

Dimension and Weights
QFN30

50HZ

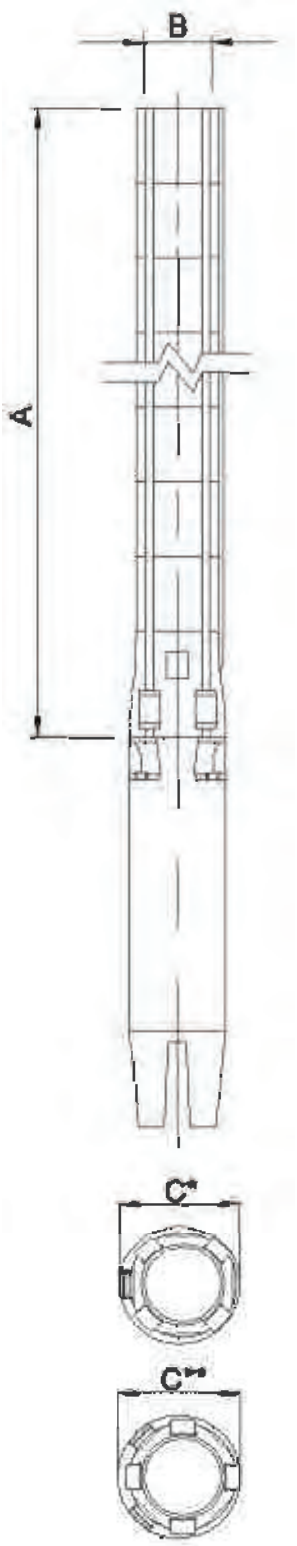

Pump Type	Motor (kw)	Dimensions (mm)					Net Weight (kg)	
		A	B	C	D	E*	Pump	Motor
QFN30-01-4”	0.55	613	270	343		131	5	7.6
QFN30-02-4”	1.1	701	298	403		131	6.4	11
QFN30-03-4”	2.2	843	408	435		131	7.9	14.2
QFN30-04-4”	2.2	932	408	524		131	9.3	16
QFN30-05-4”	3.0	1034	449	585		131	10.8	19
QFN30-06-4	3.7	1208	563	645		131	12.2	25
QFN30-07-4”	4.0	1269	563	706		131	13.7	25
QFN30-08-4”	5.5	1379	677	767		131	15.2	27
QFN30-09-4”	5.5	1440	677	828		131	16.7	27
QFN30-10-4”	5.5	1501	698	887		131	18	27
QFN30-10-06”	5.5	1517	614	887		142	18	40
QFN30-12-4”	7.5	1783	775	1008		131	20.9	30
QFN30-12-6”	7.5	1654	646	1008		142	20.9	42
QFN30-13-4”	7.5	1844	775	1069		131	22.4	30
QFN30-13-6”	7.5	1715	646	1069		142	22.4	42
QFN30-17-6”	9.0	2022	679	1311	RP	142	28.2	45
QFN30-19-6”	11.0	2142	711	1433	65mm	142	31.2	48
QFN30-20-6”	11.0	2203	711	1492	2 1/2”	142	32.5	48
QFN30-22-6”	13.0	2389	776	1613		142	35.4	50
QFN30-24-6”	13.0	2510	776	1734		142	38.3	50
QFN30-27-6”	15.0	2692	776	1916		142	42.7	54
QFN30-29-6”	18.5	2878	841	2037		142	45.6	65
QFN30-31-6”	18.5	2999	841	2158		142	48.5	65
QFN30-33-6”	18.5	3120	841	2279		142	51.4	65
QFN30-36-6”	22.0	3366	906	2460		142	55.7	70
QFN30-38-6”	22.0	3487	906	2581		142	58.6	70
QFN30-40-6”	22.0	3608	906	2702		142	61.5	70

E* Maximum diameter of pump with 4” or 6” motor