Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.


Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

Dimension and Weights
QFN360


50HZ

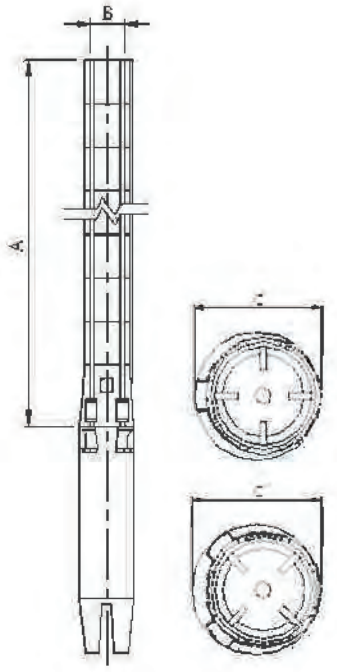

Pump Type	Motor (kw)	Dimensions (mm)			Net Weight (kg)
		B 6” Connection (RP, NPT)			
		A	C*	C**	Pump
QFN360-1A-6”	15	771.7	237	241	46.08
QFN360-1-6”	18.5	771.7	237	241	46.08
QFN2AA-6”	30	947.7	237	241	56.12
QFN360-2A-6”	37	947.7	237	241	56.12
QFN360-2-8”	45	947.7	237	241	55.78
QFN360-3AA-8”	55	1123.7	237	241	65.6
QFN360-3A-8”	55	1123.7	237	241	65.6
QFN360-3-8”	63	1123.7	237	241	65.6
QFN360-4AA-8”	75	1299.7	237	241	75.42
QFN360-4A-8”	75	1299.7	237	241	75.42
QFN360-4-8”	75	1299.7	237	241	75.42
QFN360-5AA-8”	93	1475.7	237	241	85.8
QFN360-5A-8”	93	1475.7	237	241	85.8
QFN360-5-8”	93	1475.7	237	241	85.8
QFN360-6AA-8”	110	1651.7	237	241	96.18
C* Maximum diameter of pump with one motor cable					
C** Maximum diameter of pump with two motor cables					

Dimension and Weights
QFN360

50HZ

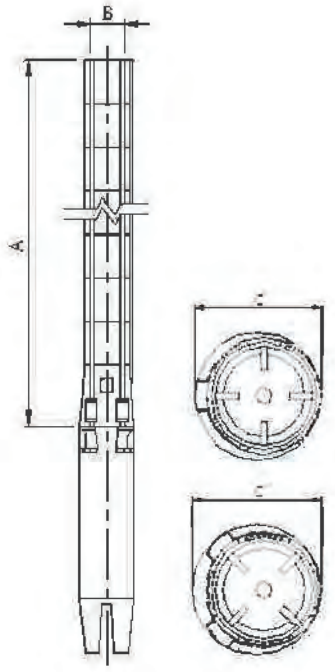

Pump Type	Motor (kw)	Dimensions (mm)			Net Weight (kg)
		B 6" Connection (RP, NPT)			
		A	C*	C**	Pump
QFN360-6A-8"	110	1651.7	237	241	96.18
QFN360-6-8"	110	1651.7	237	241	96.18
QFN360-7AA-10"	132	1827.7	262	274	111.24
QFN360-7A-10"	132	1827.7	262	274	111.24
QFN360-7-10"	132	1827.7	262	274	111.24
QFN360-8AA-10"	147	2003.7	262	274	121.48
QFN360-8A-10"	147	2003.7	262	274	121.48
QFN360-8-10"	147	2003.7	262	274	121.48
QFN360-9AA-10"	170	2179.7	262	274	131.72
QFN360-9A-10"	170	2179.7	262	274	131.72
QFN360-9-10"	170	2179.7	262	274	131.72
C* Maximum diameter of pump with one motor cable					
C** Maximum diameter of pump with two motor cables					