




SUBMERSIBLE ELECTRIC PUMP
TYPICAL AVERAGE PERFORMANCE DATA
BASED ON WATER DENSITY 1000 kg/m ³
VISCOSITY 1.13 cst 113 mm ² /s

**SERIES
TS 20**

PERFORMANCE DATA

Model	Motor kW.	Motor Amps		l/min m ³ /h l/sec	Capacity				
					0	10	15	20	25
					0.0	0.60	0.90	1.20	1.50
TS 2006/25	0.25	2.8	-	Head (Metres)	0.0	0.17	0.25	0.33	0.42
TS 2009/37	0.37	4.0	1.1		53	47	42	35	24
TS 2013/55	0.55	6.0	1.6		75	69	61	48	31
TS 2017/75	0.75	7.3	2.1		110	95	85	70	52
TS 2026/110	1.1	8.9	3.0		146	128	113	92	70
					223	192	166	135	105

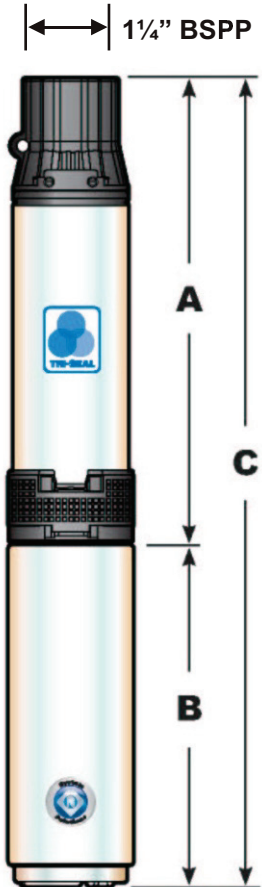

DIMENSION - 230 VOLT MOTOR

Model	Diameter mm		230 Volts					
			Length mm			Mass Kg		
	A	B	A	B	C	A	B	C
TS2006/25	95	95	307	223	530	3.6	7.3	10.9
TS2009/37	95	95	370	242	612	4.1	8.3	12.4
TS2013/55	95	95	453	271	724	5.0	9.6	14.6
TS2017/75	95	95	535	299	834	7.7	10.8	18.5
TS2026/110	95	95	521	356	877	8.6	13.5	22.1

DIMENSION - 400 VOLT MOTOR

Model	Diameter mm		400 Volts					
			Length mm			Mass Kg		
	A	B	A	B	C	A	B	C
TS2006/25	95	95	Not available in 400 Volt x 3 phase					
TS2009/37	95	95	370	223	593	4.1	7.3	11.4
TS2013/55	95	95	453	242	695	5.0	8.3	13.3
TS2017/75	95	95	535	271	806	7.7	9.6	17.3
TS2026/110	95	95	521	299	820	8.6	10.8	19.4

DATE 01/08/08

TECHNICAL DATA - DTS20.1