Stainless Steel Pumps
QFN Series

4” Stainless Steel Submersible Pumps

Designed for 50 Hertz operation.

Capacity from 10 litres / minutes to 270 litres / minutes. Motor adapter according to NEMA specifications.

Non-polluting, corrosion resistant, stamped stainless steel construction inside and outside. Stamped parts and shafts made of 304 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.

High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.



6” and 8” Stainless Steel Submersible Pumps

Designed for 50 Hertz and 60 Hertz operation.

Capacity from 140 litres / minute to 1800 litres / minute. Motor adapter according to NEMA specifications.

All stamped stainless steel parts made of AISI 304. Shafts made of 431 / 630 stainless steel.

Built-in, non-leaking, stainless steel check valve. Special design reduces danger of check valve malfunction.


High-performance, efficient impeller and diffuser designs with high quality machining result in superior performance. High quality material and construction provides corrosion resistance and long service life.

All dimensions and weights indicated in the catalogue are approximate and may vary according to the motor type and model - exact details are available on request.

wilo

Dimension and Weights
QFN75

50HZ

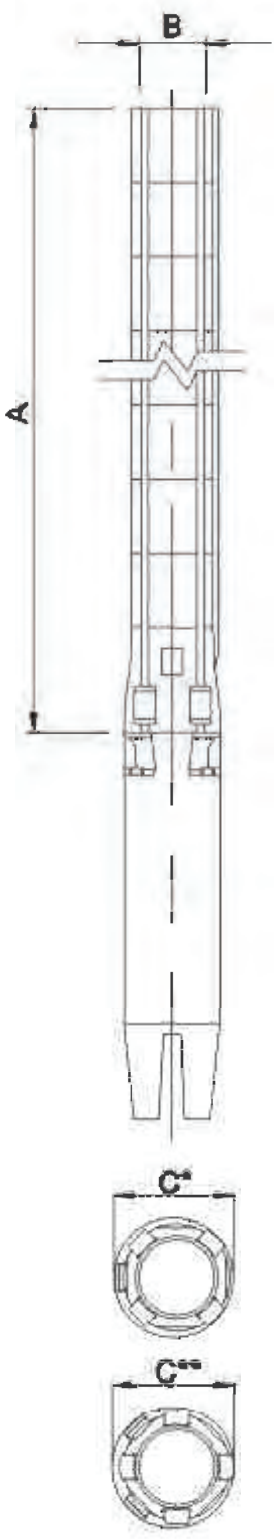

Pump Type	Motor (kw)	Dimensions (mm)						Net Weight (kg)	
		A	B	C	D	E*	E**	Pump	Motor
QFN75-02-4"	3.0	945	449	496		146		9.2	19
QFN75-03-4"	5.5	1286	677	609		146		11.5	27
QFN75-03-6"	5.5	1223	614	609		149		11.5	40
QFN75-04-4"	7.5	1478	775	703		146		13.8	30
QFN75-04-6"	7.5	1349	646	703	NPT/RP	149	152	13.8	42
QFN75-05-4"	7.5	1611	775	835	80mm	146		16	30
QFN75-05-6"	7.5	1481	646	835	3"	149	153	16	42
QFN75-06-6"	9.0	1628	680	948		149	152	18	45
QFN75-07-6"	11.0	1772	711	1061		149	152	20.6	48
QFN75-08-6"	13.0	1950	776	1174		149	152	22.9	50
QFN75-09-6"	15.0	2063	776	1287		149	152	25.5	54
QFN75-10-6"	15.0	2176	776	1400		149	152	27.4	54
QFN75-11-6"	18.5	2351	841	1510		149	152	29.4	65
QFN75-12-6"	18.5	2467	841	1626		149	152	32	65
QFN75-13-6"	18.5	2580	841	1739		149	153	34.4	65
QFN75-14-6"	22.0	2755	906	1849		149	153	36.8	70
QFN75-15-6"	22.0	2871	906	1965		149	153	38.8	70
QFN75-16-6"	30.0	3111	1036	2075		149	153	41.2	90
QFN75-17-6"	30.0	3227	1036	2191	NPT/RP	149	153	43.4	90
QFN75-18-6"	30.0	3337	1036	2301	80mm	149	153	45.8	90
QFN75-19-6"	30.0	3453	1036	2417	3"	149	152	47.9	90
QFN75-20-6"	30.0	3566	1036	2530		149	153	50.2	90
QFN75-21-6"	37.0	4125	1405	2720		149	153	52.6	101
QFN75-22-6"	37.0	4161	1405	2756		149	152	54.8	101
QFN75-23-6"	37.0	4351	1405	2946		149	152	57.2	101
QFN75-24-6"	37.0	4387	1405	2982		149	152	59.3	101
E* Maximum diameter of pump with two motor cables									
E** Maximum diameter of pump with one motor cable									