
PUMP CONTROLLER

MA ANALOGUE CONTROL BOX SINGLE PHASE

Technical data
This single phase control box is equipped with a capacitor and thermal over-load protector.

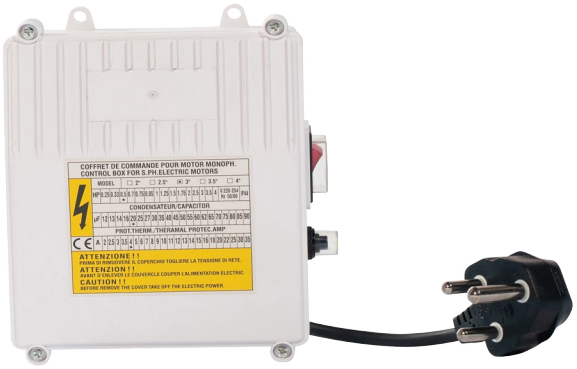

Application range

Type of motor:	Single phase motor
Motor power:	0.37-2.2kW
Voltage:	220V ~ 240V
Frequency:	50Hz

Product functions
Provides basic protection against short circuiting and over current.

Operating method
Manual control.

Installation environment index

Grade protection:	IP44
Environment temperature:	-25°C to +55°C
Environment humidity:	(20-90)%RH

POWER		RUNNING CAPACITOR	MCB
kW	HP	Microfarad (µF)	Amp
0.37	0.50	20	8
0.55	0.75	30	10
0.75	1.00	40	15
1.1	1.50	50	15
1.5	2.00	65	20
2.2	3.00	80	25

