



Hydraulic Performance Curves

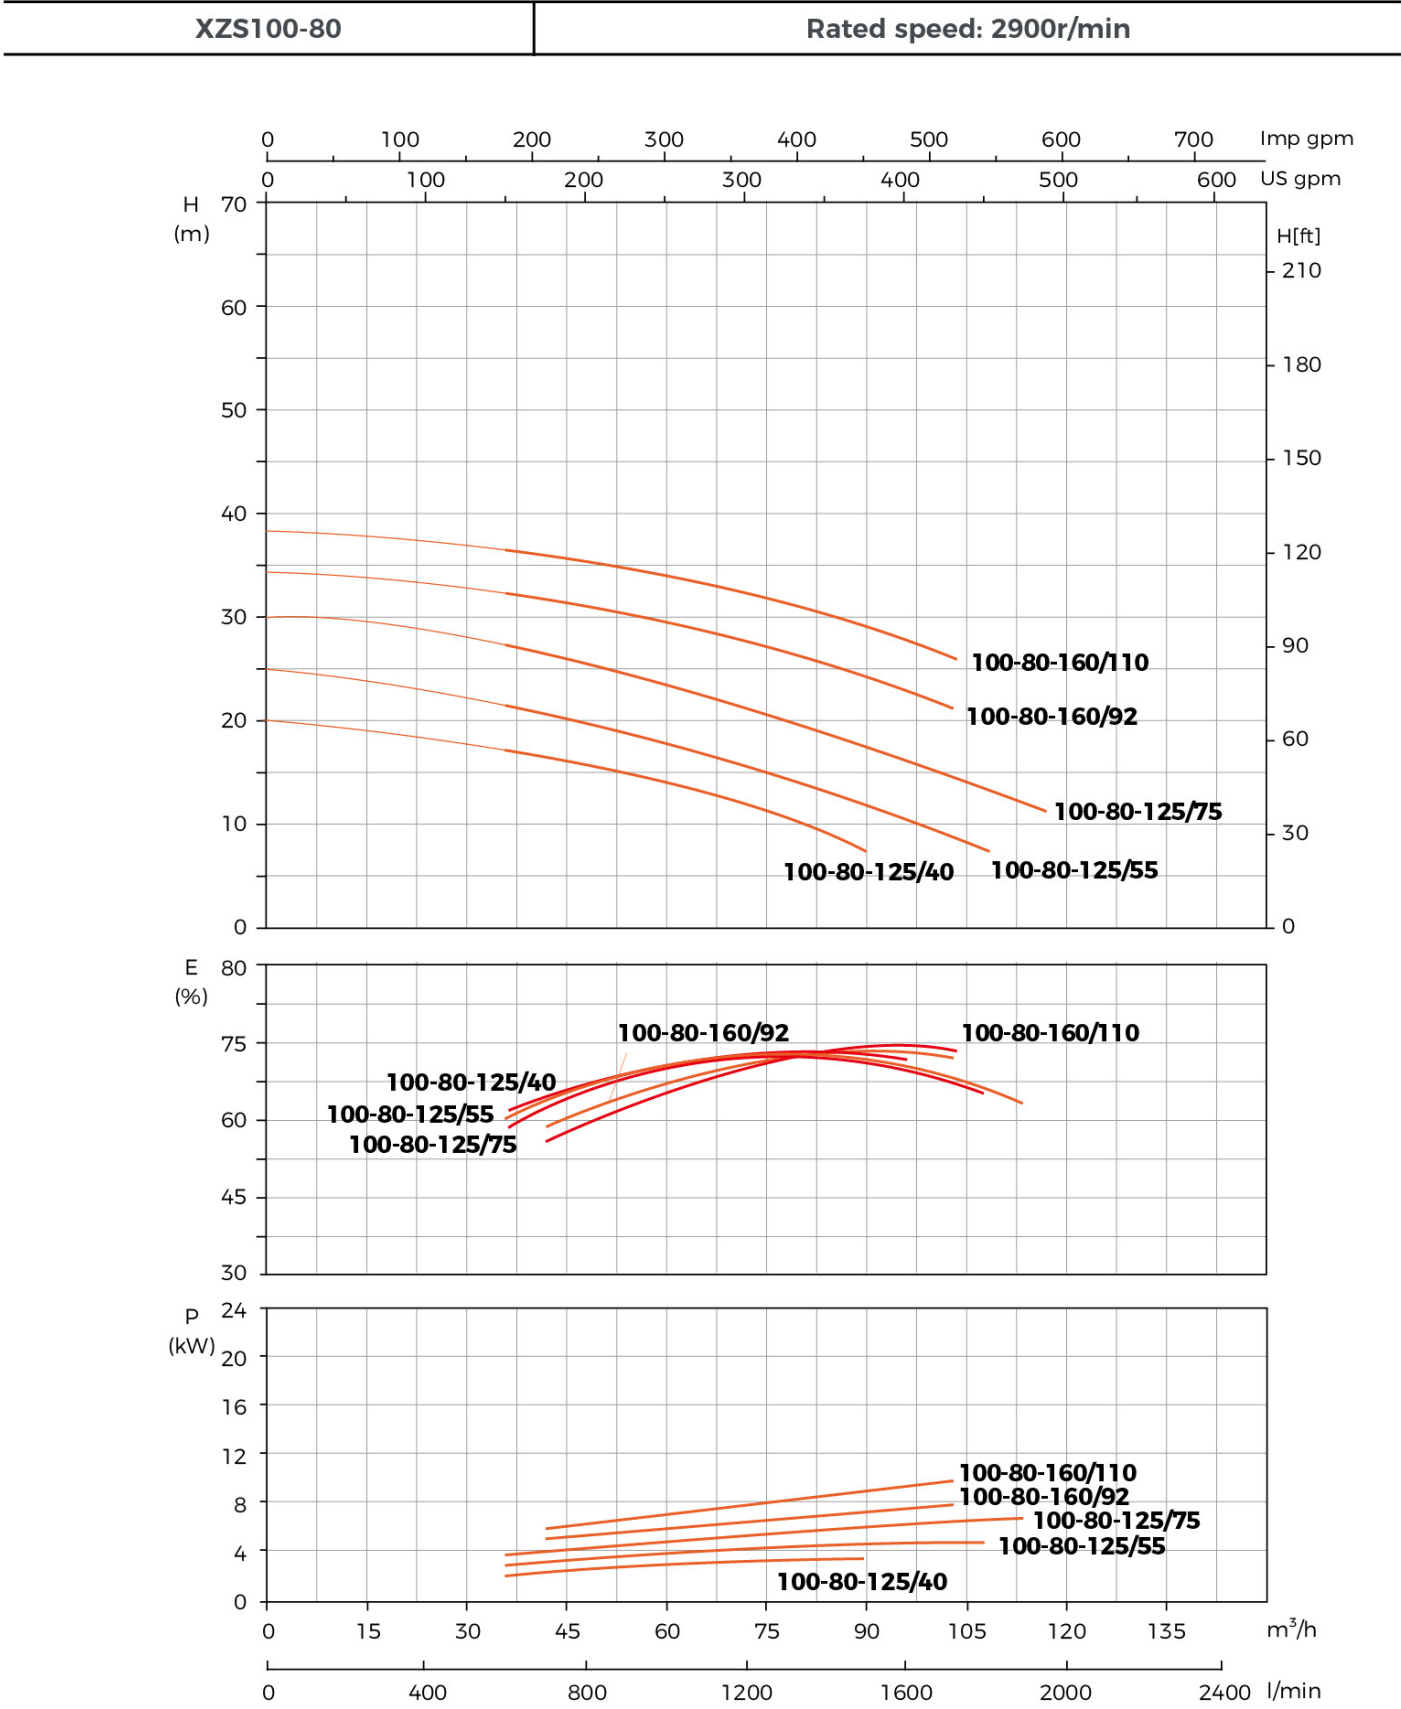

Installation Sketch

For model ≤ 7.5kW

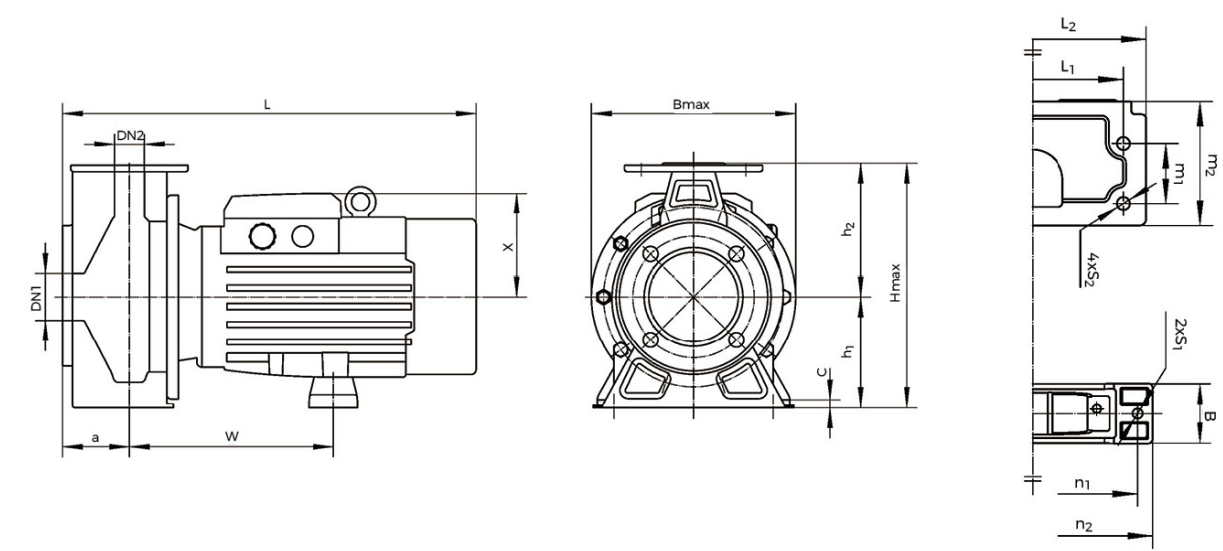

Model	DN1	DN2	a	W	L	L1	L2	m1	m2	n1	n2	h1	h2	2-S1	4-S2	B	C	X	Bmax	Hmax
XZS50-32-125/11	50	32	80	205	475	140	190	70	122	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	250
XZS50-32-160/15	50	32	80	207	477	190	240	70	122	205	240	132	160	2-Ø12	4-Ø15	65	12	127	244	292
XZS50-32-160/22	50	32	80	207	477	190	240	70	122	205	240	132	160	2-Ø12	4-Ø15	65	12	127	244	292
XZS50-32-200/30	50	32	80	244	492	190	240	70	124	225	260	160	180	2-Ø12	4-Ø15	75	15	124	295	340
XZS50-32-200/40	50	32	80	244	492	190	240	70	124	225	260	160	180	2-Ø12	4-Ø15	75	15	124	295	340
XZS65-50-125/15	65	50	80	205	475	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252
XZS65-50-125/22	65	50	80	205	475	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252
XZS65-50-160/30	65	50	80	244	492	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS65-50-160/40	65	50	80	244	492	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS65-40-200/55	65	40	40	246	563	212	265	70	146	245	280	160	180	2-Ø12	4-Ø15	70	15	142	295	340
XZS65-40-200/75	65	40	40	246	563	212	265	70	146	245	280	160	180	2-Ø12	4-Ø15	70	15	142	295	340
XZS80-65-125/30	80	65	65	254	522	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS80-65-125/40	80	65	65	254	522	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS80-65-160/55	80	65	65	256	573	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340
XZS80-65-160/75	80	65	65	256	573	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340
XZS100-80-125/40	100	80	80	256	524	212	280	95	155	225	260	160	180	2-Ø12	4-Ø15	75	15	124	280	340
XZS100-80-125/55	100	80	80	258	575	212	280	95	155	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340
XZS100-80-125/75	100	80	80	258	575	212	280	95	155	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340
XZS65-40-125/15	65	40	80	205	475	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252
XZS65-40-125/22	65	40	80	205	475	160	210	70	121	205	240	112	140	2-Ø12	4-Ø15	65	12	127	240	252
XZS65-40-160/30	65	40	80	244	492	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS65-40-160/40	65	40	80	244	492	190	240	70	123	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS65-50-125/30	65	50	100	254	522	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS65-50-125/40	65	50	100	254	522	190	240	70	158	225	260	132	160	2-Ø12	4-Ø15	75	15	124	260	292
XZS65-50-160/55	65	50	100	256	573	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340
XZS65-50-160/75	65	50	100	256	573	212	265	70	150	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340
XZS80-65-125/75	80	65	100	258	575	212	280	95	155	245	280	160	180	2-Ø12	4-Ø15	70	15	142	280	340