


Technical Specifications




- Diffuser** : Noryl
- Impeller** : Noryl
- Coupling** : Stainless steel (AISI 304)
- Strainer** : Stainless steel (AISI 304)
- Valve cap** : Stainless steel (AISI 304)
- Wear box** : Stainless steel (AISI 304)
- Top Diffuser** : Noryl
- Pump shaft** : Stainless steel (AISI 304)
- Suction case** : Stainless steel (AISI 304)
- Top bracket** : Stainless steel (AISI 304)
- Rotation** : CCW
- Revolution** : 2.900 rpm

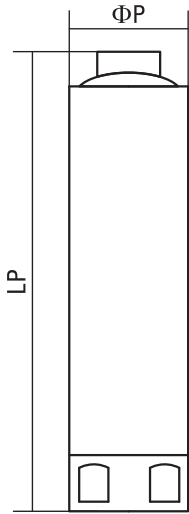

Dimension and Performance Table

Type	Stages	Motor			Pump			m ³ /h	0	0.3	0.6	0.9	1.2	1.5
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg	l/min	0	5	10	15	20	25
VSP SN 401 / 10	10	4"	0.37	0.50	324	1.25"	3.3	Head (m)	67	63	55	46	33	18
VSP SN 401 / 13	13	4"	0.37	0.50	377	1.25"	3.7		86	78	70	56	42	23
VSP SN 401 / 19	19	4"	0.55	0.75	481	1.25"	4.7		126	118	105	86	60	30
VSP SN 401 / 26	26	4"	0.75	1.00	642	1.25"	5.8		173	160	141	117	81	39
VSP SN 401 / 38	38	4"	1.10	1.50	864	1.25"	8.2		253	234	208	169	117	52

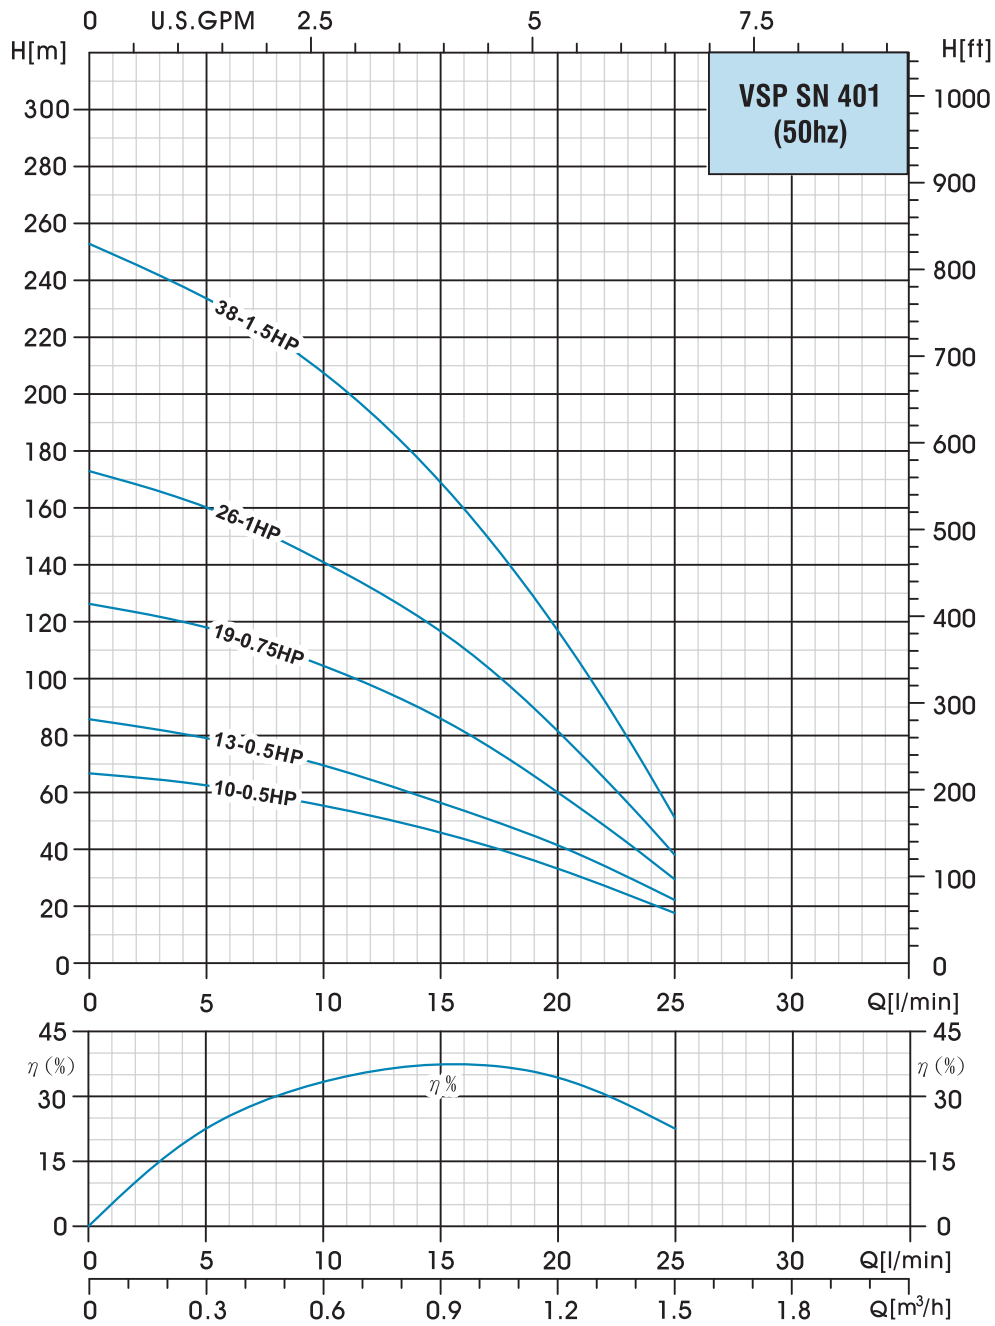

VSP SN 401 (50HZ)

No. of vanes
7

Outlet connection diameter
(inside threaded) 1 1/4"

Pump outside diameter
95 mm

Capacity
0,3-1,5 m³/h

Delivery head
234 - 52 mt

Shaft diameter
(Hexagonal) 11 mm

