


Meudy SH / SH-W High Head Submersible Drainage Pumps

Performance curves and technical data (2850 rpm, 50 Hz). 80 mm and 100 mm outlet.

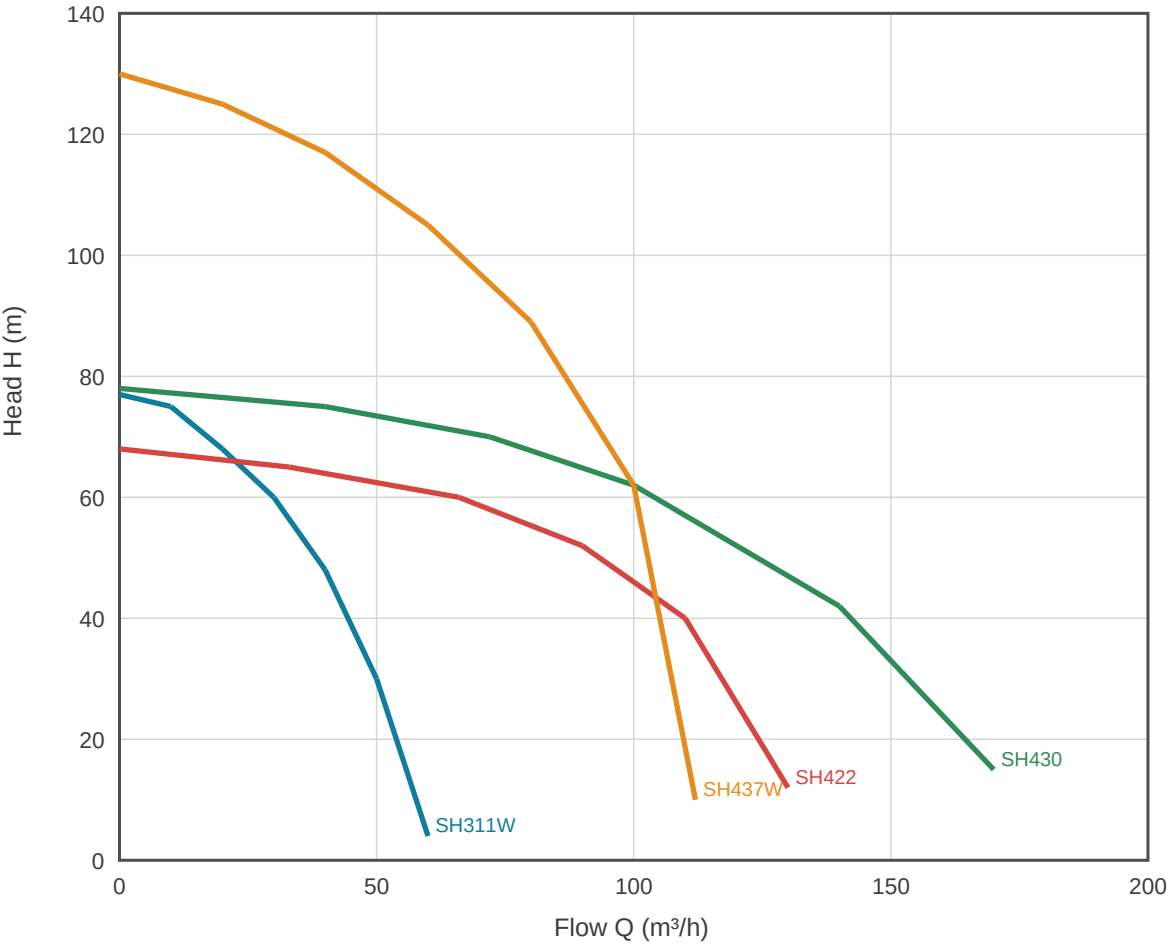


Model	Motor	Outlet	Rated duty	Max H / Q
SH311W	11 kW	80 mm	30 m³/h @ 60 m	78 m / 60
SH422	22 kW	100 mm	66 m³/h @ 60 m	68 m / 130
SH430	30 kW	100 mm	72 m³/h @ 70 m	78 m / 170
SH437W	37 kW	100 mm	60 m³/h @ 105 m	130 m / 112

SH311W direct-on-line start; 22 kW and up star-delta.
Three-phase 400 V or 525 V, 50 Hz.
Max. liquid temperature 40 °C, IP68 motor.
Data per manufacturer performance table.

Pumps On Line - www.pumps.co.za

Meudy SH High Head Submersible Drainage Pumps

Performance curves and technical data (2850 rpm, 50 Hz). 150 mm outlet.

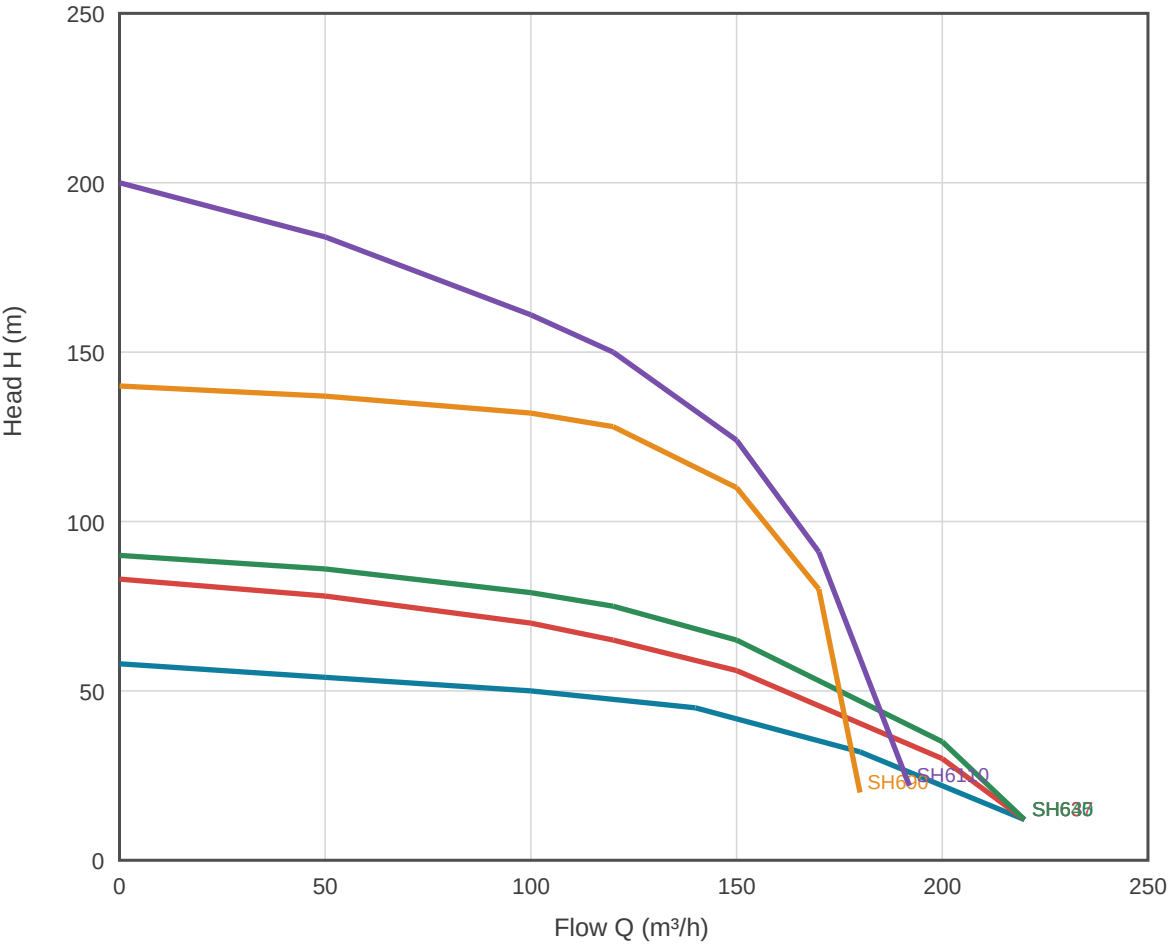


Model	Motor	Outlet	Rated duty	Max H / Q
SH630	30 kW	150 mm	140 m³/h @ 45 m	58 m / 220
SH637	37 kW	150 mm	120 m³/h @ 65 m	83 m / 220
SH645	45 kW	150 mm	120 m³/h @ 75 m	90 m / 220
SH690	90 kW	150 mm	120 m³/h @ 128 m	140 m / 180
SH6110	110 kW	150 mm	120 m³/h @ 150 m	200 m / 192

Star-delta starting.
Three-phase 400 V or 525 V, 50 Hz.
Max. liquid temperature 40 °C, IP68 motor.
Data per manufacturer performance table.

Pumps On Line - www.pumps.co.za

Meudy SH High Flow Submersible Drainage Pumps

Performance curves and technical data (2850 rpm, 50 Hz). 200 mm outlet.

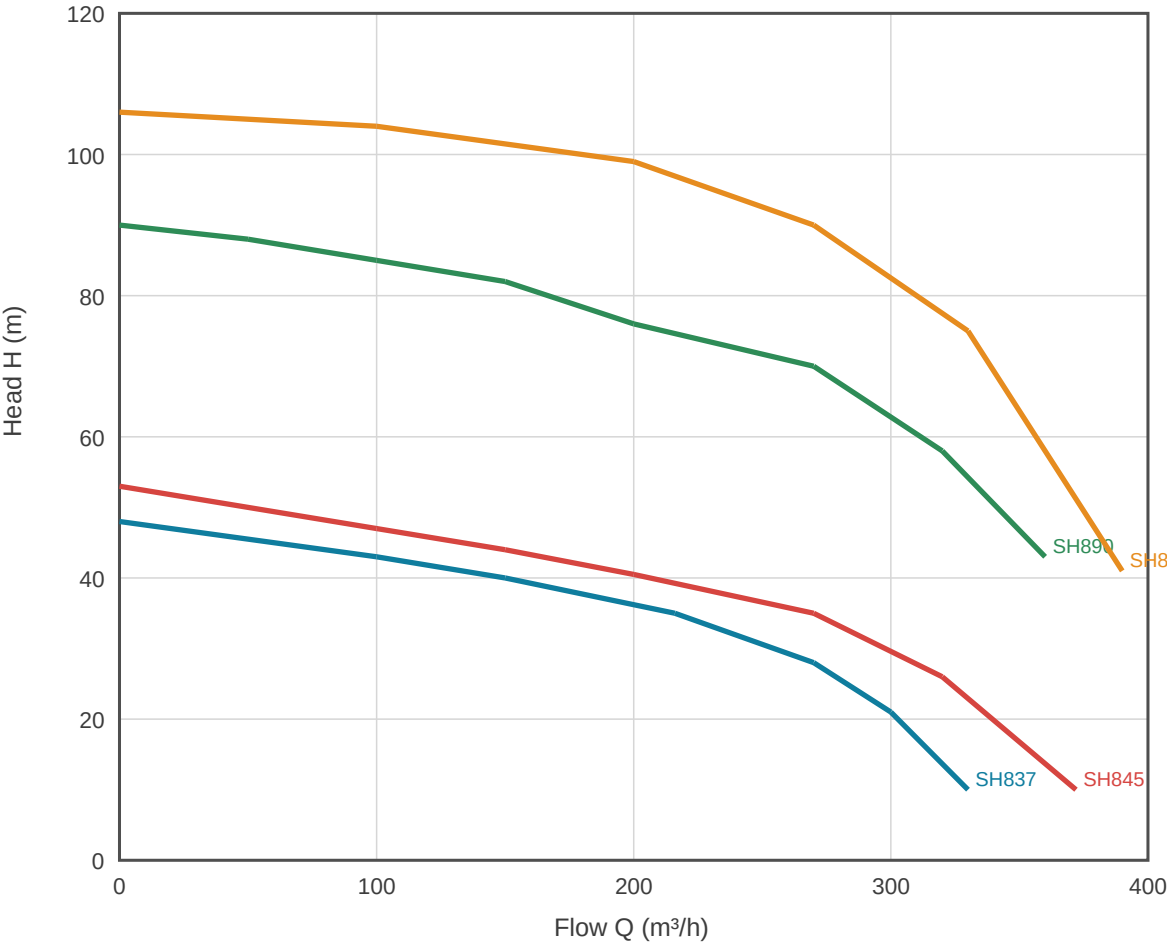

Model	Motor	Outlet	Rated duty	Max H / Q
SH837	37 kW	200 mm	216 m³/h @ 35 m	48 m / 330
SH845	45 kW	200 mm	270 m³/h @ 35 m	53 m / 372
SH890	90 kW	200 mm	270 m³/h @ 70 m	90 m / 360
SH8110	110 kW	200 mm	270 m³/h @ 90 m	107 m / 390

Star-delta starting.
Three-phase 400 V or 525 V, 50 Hz.
Max. liquid temperature 40 °C, IP68 motor.
Data per manufacturer performance table.

Pumps On Line - www.pumps.co.za