
FPS VR series

VERTICAL MULTISTAGE PUMP
TECHNICAL DATA


VR3

Dimensional Data


F Version (Standard)

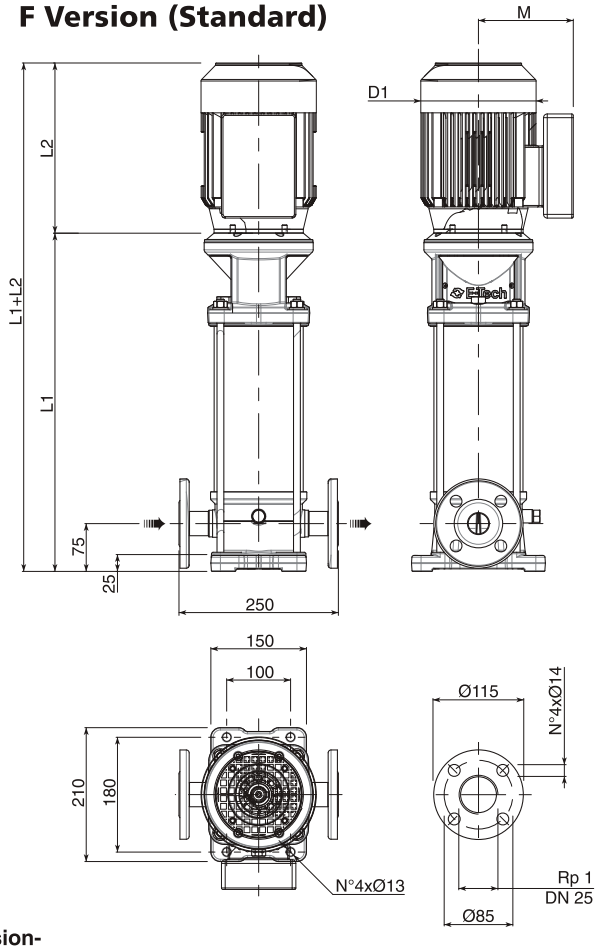


T Version

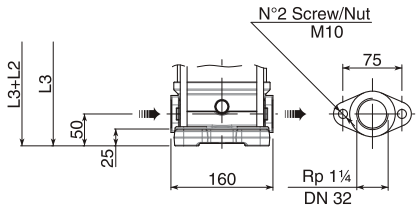

V Version



C Version



F version-
Round flanges on body type PN25.

T version-
Oval flanges on body type PN16: the pump is supplied without oval counter flanges for pipe to be screwed, joints and bolts (Optional accessories).

V version-
Connections with rapid fittings type “Victaulic”: the pump is supplied without the collars (Optional accessories).

C version-
Connections with round fittings type Clamp-FlexiClamp: the pump is supplied without collars (Optional accessories).

Pump Model	Motor			Dimensions (MM)										Weight (KG)				
	KW/HP	Size	MTG	L1	L2		L3	L4	L5	M		D1		PE	Motor		PMA	
				F	1-ph	3-ph	T-vers	V-vers	C-vers	1-ph	3-ph	1-ph	3-ph		1-ph	3-ph	1-ph	3-ph
VR3/2	.37/.55	71	B14	328.5	210	210	303.5	303.5	303.5	123	117	145.0	139.0	15.0	5.5	5.2	20.5	20.2
VR3/3	.55/.75	71	B14	352.5	210	210	327.5	327.5	327.5	123	117	145.0	139.0	15.5	5.5	5.2	21	20.7
VR3/4	.75/1.0	80	B14	376.5	250	250	351.5	351.5	351.5	142	137	165.0	158.0	16.0	8.9	8.7	24.9	24.7
VR3/5	.75/1.0	80	B14	400.5	250	250	375.5	375.5	375.5	142	137	165.0	158.0	17.0	8.9	8.7	25.9	25.7
VR3/6	1.1/1.5	80	B14	425.0	250	250	400.0	400.0	400.0	142	137	165.0	158.0	17.5	8.9	8.7	26.4	26.2
VR3/7	1.1/1.5	80	B14	449.0	250	250	424.0	424.0	424.0	142	137	165.0	158.0	18.0	8.9	8.7	26.9	26.7
VR3/8	1.5/2.0	90S	B14	483.0	260	260	458.0	458.0	458.0	150	145	185.0	175.0	19.0	12	12	31	31
VR3/10	1.5/2.0	90S	B14	531.0	260	260	506.0	506.0	506.0	150	145	185.0	175.0	20.5	12	12	32.5	32.5
VR3/12	2.2/3.0	90L	B14	579.0	285	285	554.0	554.0	554.0	150	145	185.0	175.0	21.5	15	14.5	36.5	36
VR3/14	2.2/3.0	90L	B14	627.0	285	285	602.0	602.0	602.0	150	145	185.0	175.0	23.0	15	14.5	38	37.5
VR3/17	3.0/4.0	100L	B14	709.0		308		684.0	684.0		152		197.0	25.0		20		45
VR3/20	4.0/5.5	112	B14	781.0		335		756.0	756.0		180		220.0	27.0		26		53
VR3/22	4.0/5.5	112	B14	829.0		335		804.0	804.0		180		220.0	28.5		26		54.5