




Motor technical data

Three phase power:	0.37 to 7.5kW
Speed:	2850rpm
Voltage:	380 ~ 415V/50Hz
Insulation class:	B
Protection grade:	IP 68
Highest temperature of liquid:	35°C
Maximum solid handling:	40g/m ³
Motor casing:	stainless steel
Maximum diameter:	Φ 95 mm
With sand proof cover/pressure balance membrane/mechanical seal for high performance.	
Flange and coupling according to NEMA standard.	

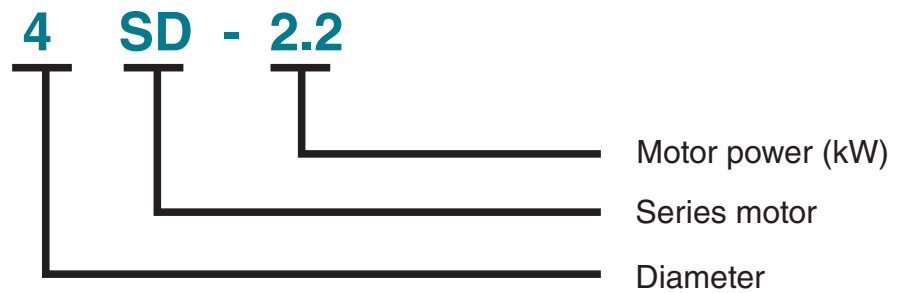

Motor dimensions

TYPE Three Phase 380V~/50HZ	MOTOR POWER			DIMENSIONS	
	kW	HP	RUNNING AMPS	Length (mm)	Weight (kg)
4SD - 0.37	0.37	0.5	1.5	314	6.7
4SD - 0.55	0.55	0.75	1.8	329	7.3
4SD - 0.75	0.75	1.0	2.5	344	8
4SD - 1.1	1.1	1.5	3.2	379	9.8
4SD - 1.5	1.5	2.0	4.3	424	11.7
4SD - 2.2	2.2	3.0	6.0	514	15.7
4SD - 3	3.0	4.0	8.0	594	19.8
4SD - 4	4.0	5.5	10.0	698	23.7
4SD - 5.5	5.5	7.5	13.0	788	28
4SD - 7.5	7.5	10.0	17.0	908	34