
Amandla Jenny J-Series Drainage Pumps (J4 – J90)

Performance curves and technical data (50 Hz, 2950 rpm). Flameproof (X) and standard versions have the same hydraulics.

Performance Curves

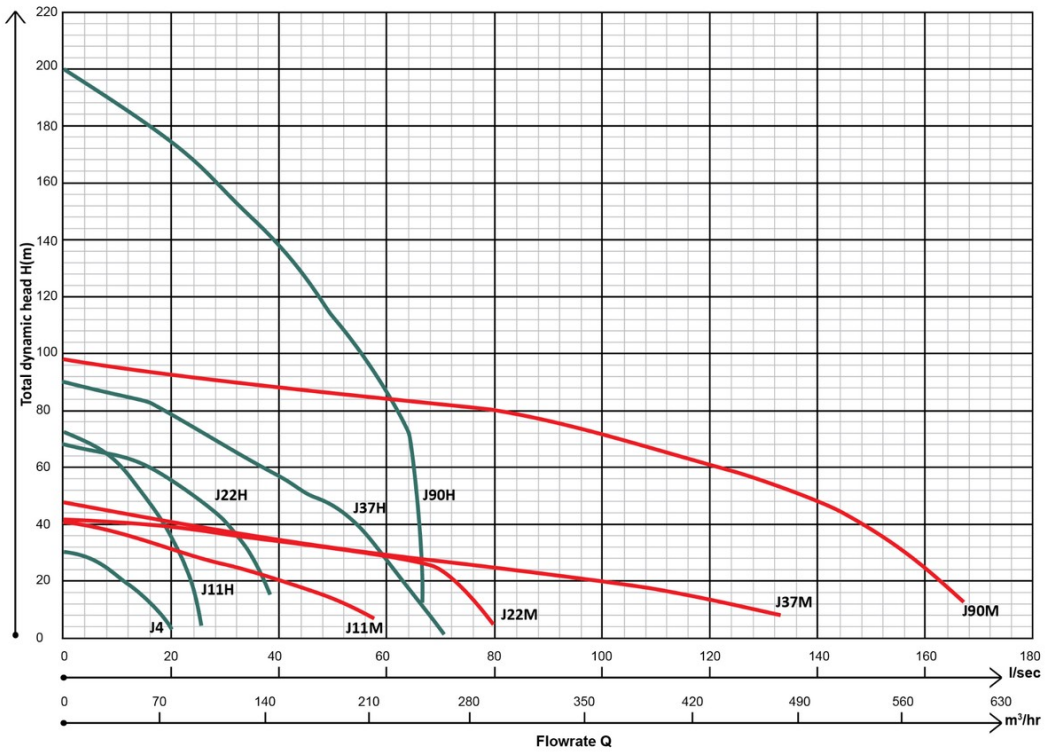

Model	Motor	Weight	Max SG	Solids	Shut-off	Max flow
J4	4 kW	70 kg	1.0	8 mm	30.5 m	20 l/s
J11H	11 kW	282 kg	1.1	8 mm	72 m	25 l/s
J11M	11 kW	285 kg	1.1	15 mm	41 m	58 l/s
J22H	22 kW	415 kg	1.1	8 mm	68 m	38 l/s
J22M	22 kW	423 kg	1.1	15 mm	41 m	80 l/s
J37H	37 kW	505 kg	1.1	8 mm	90 m	70 l/s
J37M	37 kW	512 kg	1.1	15 mm	48 m	132 l/s
J90H	90 kW	1155 kg	1.1	8 mm	200 m	67 l/s
J90M	90 kW	1070 kg	1.05	15 mm	98 m	166 l/s

All models: 3-phase motor, 380 V – 1140 V, 50 Hz, 2950 rpm.

Max. liquid temperature 60 °C. Drainage of water with small particles.

H = high head, low flow; M = medium head, high flow.

Flameproof certified versions (suffix X) for fiery mines.

Shut-off head and max. flow read off the curves (approximate).

Pumps On Line - www.pumps.co.za