


TK100

Performance data

Model	Power		Q (m ³ /h)	10	20	30	40	50	60	70	80	90	100	110	120	130	145	160
	kW	HP																
TK100-9/2	2.2	3	H (m)	13.8	13.2	12.2	10.8	9	6.8	4.4								
TK100-15/2	4	5.5		18.5	18.2	17.7	17.1	16.2	15	13.4	11							
TK100-17/2	5.5	7.5		21.6	21.5	21.1	20.7	20	19.2	18.3	17	15.3	13	10.4				
TK100-22/2	7.5	10		26.7	26.6	26.3	25.9	25.3	24.5	23.4	22	20.3	18.2	15.8				
TK100-27/2	11	15		31.4	31.3	31.1	30.9	30.7	30.3	29.8	29.2	28.2	27	25.5	23.6	20.8		
TK100-33/2	15	20		37	37	36.8	36.6	36.2	35.8	35.3	34.7	33.9	33	31.7	30.1	27.9		
TK100-40/2	18.5	25		43.2	43.2	43.1	42.9	42.7	42.4	42.1	41.6	40.9	40	38.9	37.4	35.3		
TK100-48/2	22	30		51.1	51.1	51	50.8	50.6	50.3	49.9	49.4	48.8	48	46.9	45.3	43.2		
TK100-52/2	30	40		55.2	55.3	55.3	55.3	55.2	55.1	54.8	54.6	54.4	54.2	53.8	53.1	52	49	43.4

Installation dimensions & weight

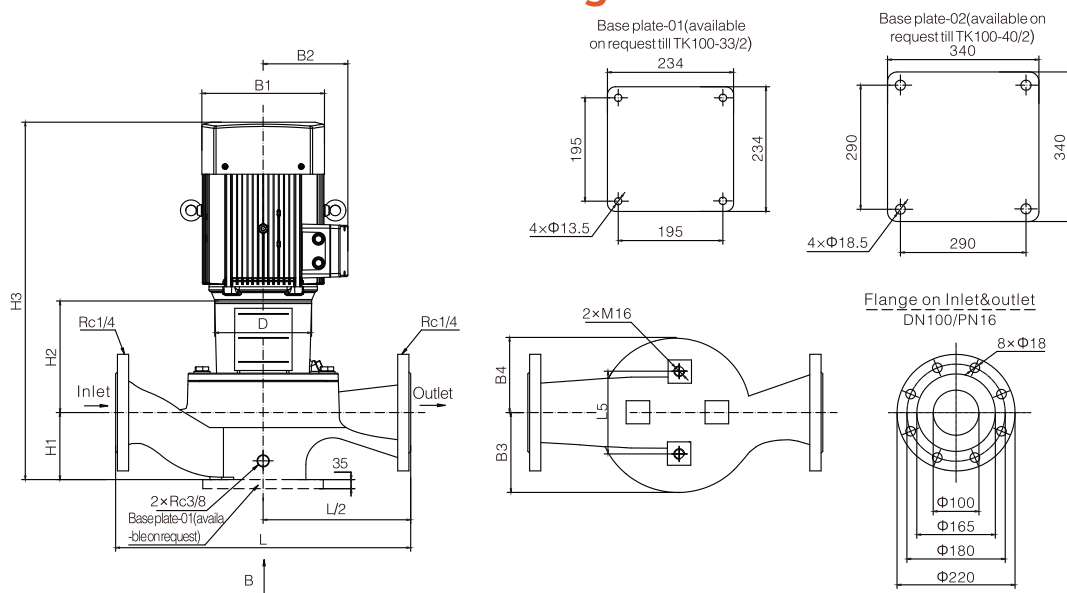

Model	Dimensions (mm)										Weight (kg)
	D	B1	B2	B3	B4	B5	H1	H2	H3	L	
TK100-9/2	140	175	155	132	99	160	105	211	609	450	54
TK100-15/2	160	215	190	132	99	160	105	212	652	450	70
TK100-17/2	200	260	205	148	115	144	140	237	787	500	98
TK100-22/2	200	260	205	148	115	144	140	237	787	500	106
TK100-27/2	350	350	255	145	121	144	140	252	934	550	184
TK100-33/2	350	350	255	145	121	144	140	252	967	550	194
TK100-40/2	350	350	255	179	150	230	140	266	981	550	216
TK100-48/2	350	350	280	179	150	230	140	266	1011	550	258
TK100-52/2	400	400	305	179	150	230	140	266	1071	550	312

Performance curves

