


TK125

Performance data

Model	Power		Q (m ³ /h)	40	60	80	100	120	140	160	180	200
	kW	HP										
TK125-11/4	5.5	7.5	H (m)	12.8	12.7	12.4	11.8	11	9.9	8		
TK125-14/4	7.5	10		16.1	15.9	15.5	14.9	14	12.8	11.2		
TK125-18/4	11	15		21.4	21.3	21	20.6	19.9	19.1	18	16.4	14
TK125-22/4	15	20		26.6	26.5	26.2	25.7	24.9	23.7	22	19.8	16.6
TK125-28/4	18.5	25		30.8	30.8	30.7	30.5	30.1	29.3	28	25.8	22.1
TK125-32/4	22	30		34.6	34.6	34.5	34.4	34	33.3	32	30.2	27.2
TK125-40/4	30	40		43.8	43.6	43.3	42.9	42.2	41.3	40	38	35.3
TK125-48/4	37	50		51.4	51.3	51	50.5	49.9	49.1	48	46.4	44.1

Installation dimensions & weight

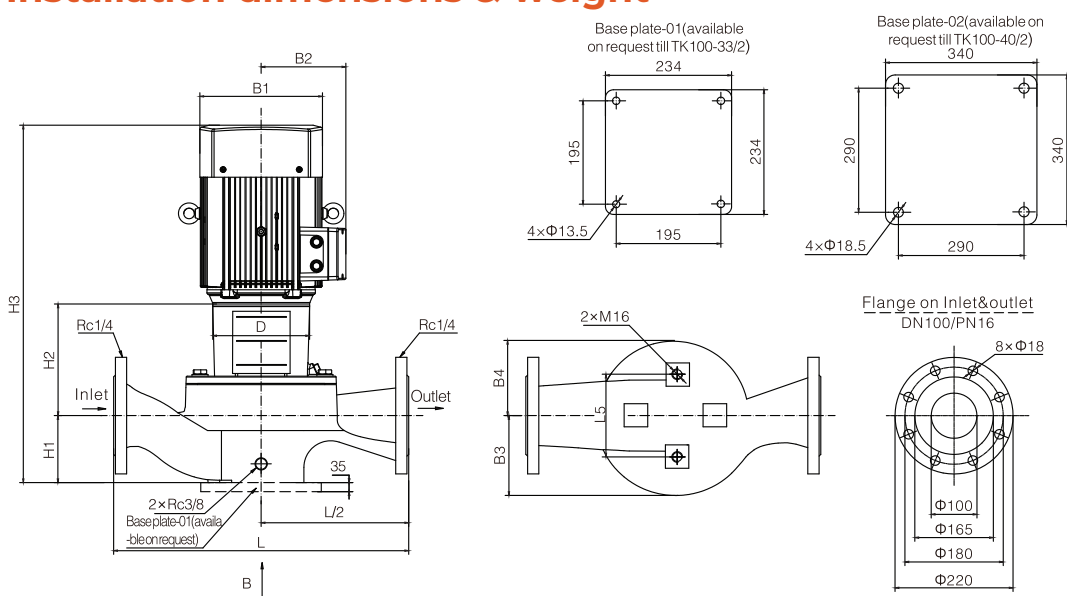

Model	Dimensions (mm)										Weight (kg)
	D	B1	B2	B3	B4	B5	H1	H2	H3	L	
TK125-11/4	200	260	208	215	175	230	215	256	887	620	142
TK125-14/4	200	260	208	215	175	230	215	256	887	620	152
TK125-18/4	350	330	255	210	176	230	215	297	1054	800	258
TK125-22/4	350	330	255	235	207	230	215	297	1087	800	310
TK125-28/4	350	330	280	235	207	230	215	316	1106	800	350
TK125-32/4	350	330	280	235	207	230	215	316	1136	800	376
TK125-40/4	400	400	305	271	247	230	215	323	1238	800	462
TK125-48/4	450	450	335	271	247	230	215	323	1243	800	518

Performance curves

