


TK150

Performance data

Model	Power		Q (m ³ /h)	50	80	110	140	170	200	220	240
	kW	HP									
TK150-12.5/4	11	15	H (m)	14.5	14.5	14.4	14.2	13.7	12.5	11.1	9.1
TK150-17/4	15	20		18.7	18.8	18.7	18.5	18	17	16.1	14.9
TK150-21/4	18.5	25		23.2	23.1	22.9	22.6	22	21	19.8	17.8
TK150-25/4	22	30		27.9	28	27.8	27.3	26.5	25	23.5	21.2
TK150-33/4	30	40		35.4	35.4	35.2	34.8	34.2	33	31.5	29.5
TK150-40/4	37	50		43	43	42.8	42.4	41.6	40	38.4	36.1
TK150-50/4	45	60		52.3	52.2	52	51.7	51.1	50	48.7	46.6

Installation dimensions & weight

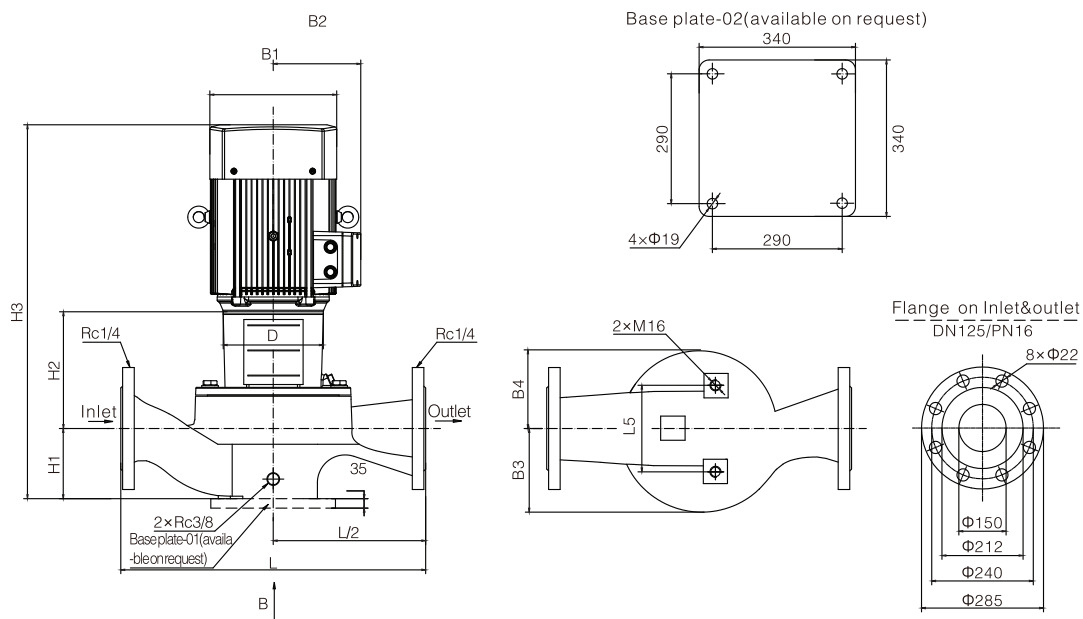

Model	Dimensions (mm)										Weight (kg)
	D	B1	B2	B3	B4	B5	H1	H2	H3	L	
TK150-12.5/4	350	315	255	216	179	230	215	293	1050	800	260
TK150-17/4	350	315	255	216	179	230	215	293	1083	800	276
TK150-21/4	350	360	280	216	179	230	215	293	1083	800	314
TK150-25/4	350	360	280	237	207	230	215	293	1113	800	372
TK150-33/4	400	400	305	237	207	230	215	293	1208	800	430
TK150-40/4	450	450	335	266	247	230	230	323	1258	900	432
TK150-50/4	450	450	335	266	247	230	230	323	1283	900	556

Performance curves

