



Guide Rail System

- Suitable for pumps with flange conforming ISO7005-92 standard.
- Automatic engagement with flanged elbow


Includes

- Duck-foot bend
 - Guide hook
 - Flange connector
 - Upper guide support
 - Bolts and lock washers
- (Foundation bolts and guide pipes are not included)

Identification Codes

SW 50 - 50

— Pipe Diameter
— Pump Outlet
— LEO Product Style

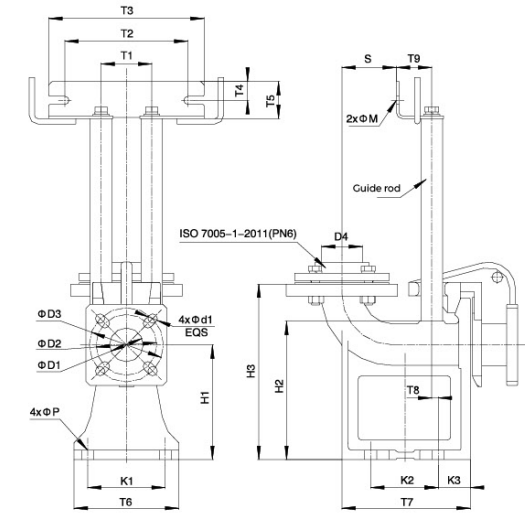

Dimension

Model	D1	D2	D3	D4	T1	T2	T3	T4	T5	T6	T7	T8	T9	K1	K2	K3	H1	H2	H3	S	M	P	d1
SW50-50(PN6)	50	90	110	G2	75	182	230	28	55	165	190	12	52.5	115	100	45	170	205	260	80.5	12	18	14
SW65-65(PN6)	65	-	130	G2.5	85	182	230	28	55	190	210	17	59	145	120	45	175	220	270	89	12	18	14
SW80-80(PN6)	80	-	150	G3	85	182	230	28	55	220	242	27	59	175	160	41	190	246	290	115	12	18	18
SW100-100(PN6)	100	170	-	-	100	182	250	28	55	220	350	38	59	169	266	41	230	305	360	135	14	22	19
SW100-100(PN10)	100	-	180	-	100	182	250	28	55	220	350	38	59	169	266	41	230	305	360	135	14	22	19
SW150-150(PN6)	150	225	-	-	100	182	250	28	55	330	460	40	59	280	340	57	275	380	447	191	14	22	19
SW150-150(PN10)	150	-	240	-	100	182	250	28	55	330	460	40	59	280	340	57	275	380	447	191	14	22	22

Standard with threaded flange and fastening bolt, with bracket welder; Without guide rod, guide chain and anchor bolts, and without fixed bolts for bracket weldment, the customer shall provide them by himself. Guide rod can be standard galvanized water pipe.(DN100 and above are circular outlets without flanges)


Package Information

Model	Caliber (mm)	Nominal pressure	Packing Dimension (mm)	G.W (kg)	N.W (kg)
DN50-PN6	50	PN6	377x322x205	23	17.6
DN65-PN6	65	PN6	406x339x230	30	23.5
DN80-PN6	80	PN6	460x375x270	39.5	30.8
DN100-PN6	100	PN6	523x483x296	53.8	45
DN150-PN6	150	PN6	605x355x650	97	86.6
DN200-PN6	200	PN6	690x390x757	138.5	122.5
DN250-PN6	250	PN6	765x430x845	179	160
DN100-PN10	100	PN10	523x483x296	53.8	45
DN150-PN10	150	PN10	605x355x650	97	86.6
DN200-PN10	200	PN10	690x390x757	138.5	122.5
DN250-PN10	250	PN10	765x430x845	179	160

Flange Elbow




Dimension

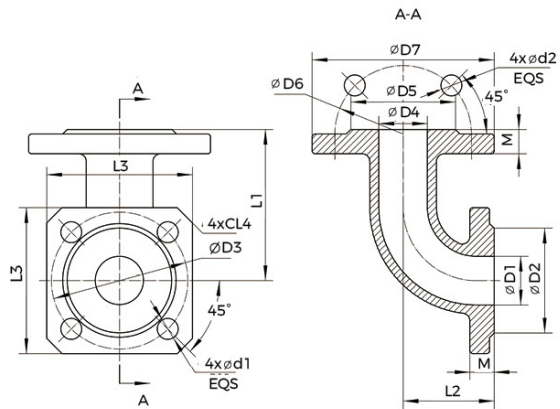

Model	D1	D2	D3	D4	D5	D6	D7	L1	L2	L3	L4	M	d1	d2
32-32 Flange Elbow	32	69	90	32	69	90	120	100	60	96	10	16	14	14
40-50 Flange Elbow	40	78	100	50	88	110	140	120	60	110	15	16	14	14
50-50 Flange Elbow	50	88	110	50	88	110	140	105	105	120	15	16	14	14
65-65 Flange Elbow	65	108	130	65	108	130	160	130	130	145	20	16	14	14
80-80 Flange Elbow	80	124	150	80	124	150	190	155	155	145	15	18	18	18

Hose Coupling

Dimension

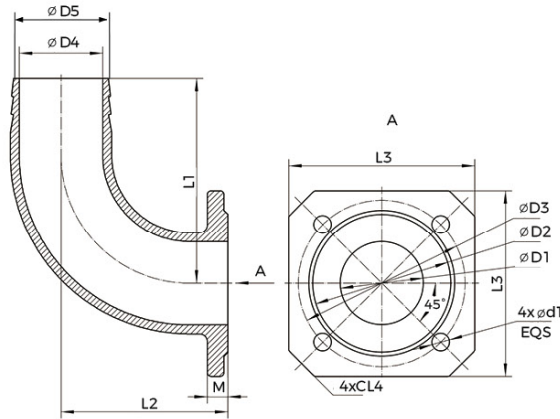

Model	D1	D2	D3	D4	D5	L1	L2	L3	L4	M	d1
• 50-40 Hose Coupling	50	88	110	38	48	115	65	120	15	16	14
• 65-50 Hose Coupling	65	108	130	51	61	125	68	145	20	16	14
• 80-60 Hose Coupling	80	124	150	60	70	140	75	145	15	16	18
50-50 Hose Coupling	50	88	110	50	58	140	120	120	15	16	14
65-65 Hose Coupling	65	108	130	65	74	160	130	145	20	18	14
80-80 Hose Coupling	80	124	150	80	87	190	135	145	15	18	18

• Product standard