
AquaDuty AQDB Stainless Steel Dirty-Water Drainage Pumps

Performance curves and technical data (50 Hz).

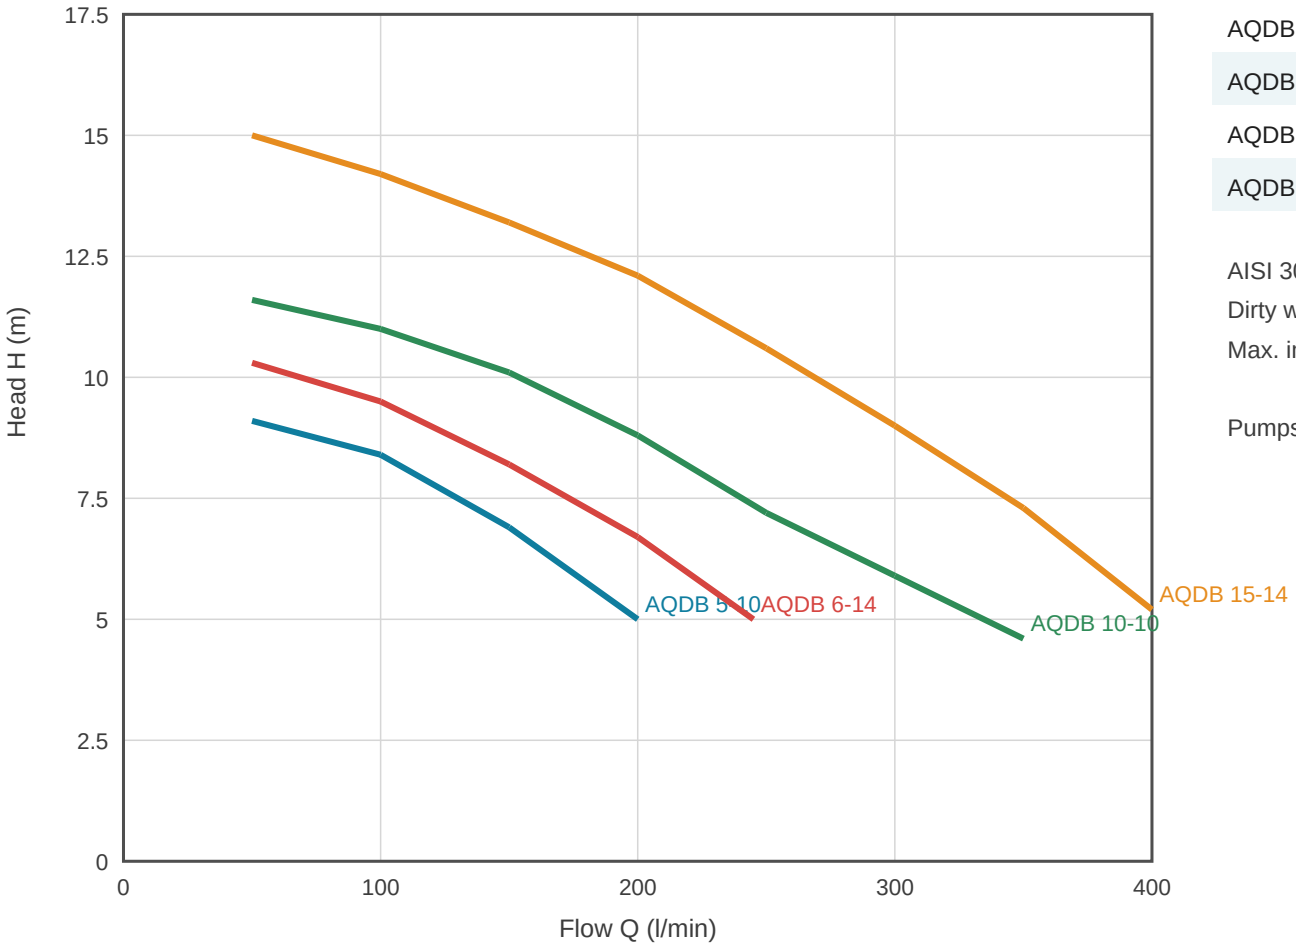

Model	Motor	Supply	Max head	Max flow
AQDB 5-10	0.55 kW	230 V	9.1 m	200 l/min
AQDB 6-14	0.75 kW	230 V	10.3 m	245 l/min
AQDB 10-10	1.1 kW	230 V	11.6 m	350 l/min
AQDB 15-14	1.5 kW	230 V	15 m	400 l/min

AISI 304 stainless steel, vortex impeller, IP68.

Dirty water with solids up to 40 mm, max 35 °C.

Max. immersion 5 m. Heads read off the curve (approximate).

Pumps On Line - www.pumps.co.za