
AquaDuty AQDS Dirty-Water Submersible Drainage Pumps (plastic)

Performance curves and technical data (50 Hz).

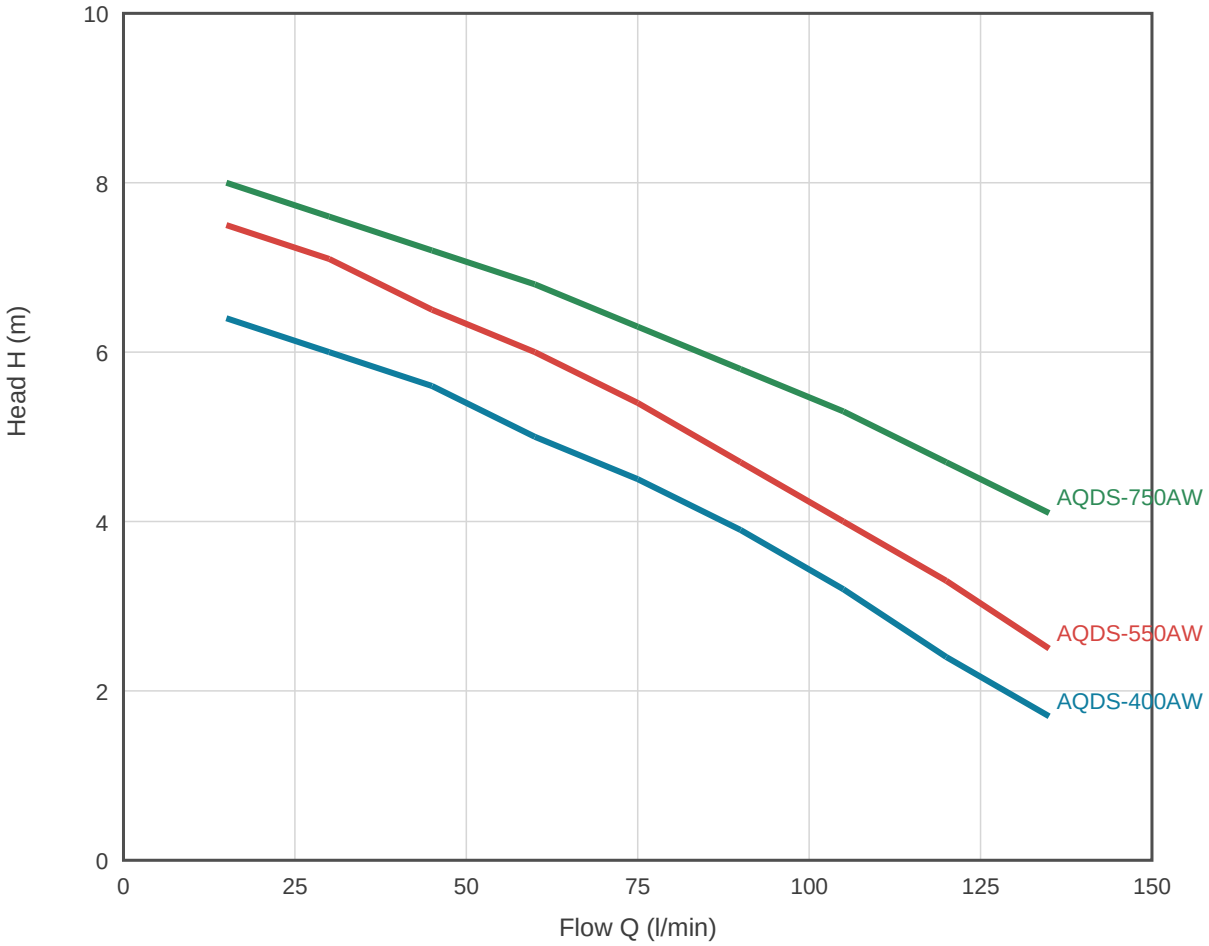

Model	Motor	Supply	Max head	Max flow
AQDS-400AW	0.4 kW	230 V	6.4 m	135 l/min
AQDS-550AW	0.55 kW	230 V	7.5 m	135 l/min
AQDS-750AW	0.75 kW	230 V	8 m	135 l/min

Technopolymer body, IP68, 2850 rpm.
Dirty water, solids up to 5 mm, max 35 °C.
Heads read off the curve (approximate).

Pumps On Line - www.pumps.co.za