
AKS-PH

CLEAN WATER SUBMERSIBLE PUMP



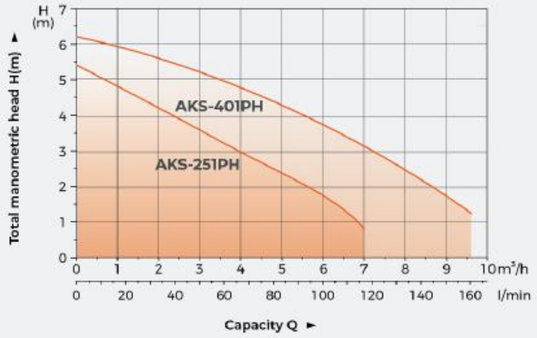

Features

Engineering plastic pump body

Float switch ensures automatic cut-in and cut-out

Built-in thermal protector

Application


Can be used for transfer clean water or other liquids similar to water in physical and chemical properties

Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	AKS-251PH	AKS-401PH
Rated Power	250 W	400 W
Max. Head	6 m	6 m
Max. Flow	7 m³/h	9 m³/h
Max. Depth of immersion	7 m	7 m
Max. Dia of Particle	5 mm	5 mm
Outlet	1 1/4"	1 1/4"
Power Cable Type	H05RN-F	H05RN-F
Length of Power Cable	10 m	10 m
Protection Class	IPX8	IPX8
Max. liquid Temperature	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs
Package Dimension	440x350x300 mm	440x350x300 mm
Package Gross Weight	16.68 kg	17.88 kg
Qty/20'GP	2700	2700
Automatic function	Float Switch	Float Switch

AKS-PWH

DIRTY WATER SUBMERSIBLE PUMP

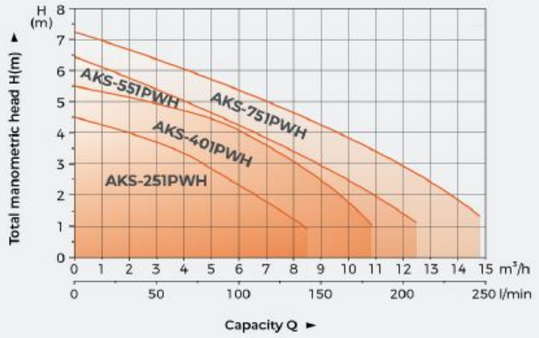



Features

Engineering plastic pump body

Float switch ensures automatic cut-in and cut-out

Built-in thermal protector

Application

Can be used for transfer clean water or other liquids similar to water in physical and chemical properties

Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	AKS-251PWH	AKS-401PWH	AKS-551PWH	AKS-751PWH
Rated Power	250 W	400 W	550 W	750 W
Max. Head	5 m	5 m	7 m	8 m
Max. Flow	8 m³/h	10 m³/h	12 m³/h	14 m³/h
Max. Depth of immersion	7 m	7 m	7 m	7 m
Max. Dia of Particle	25 mm	25 mm	35 mm	35 mm
Outlet	1 1/4"	1 1/4"	1 1/2"	1 1/2"
Power Cable Type	H05RN-F	H05RN-F	H05RN-F	H05RN-F
Length of Power Cable	10 m	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8	IPX8
Max. liquid Temperature	35 °C	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs	4 pcs
Package Dimension	440x350x330 mm	440x350x330 mm	420x350x370 mm	420x350x370 mm
Package Gross Weight	16.4 kg	18.4 kg	20.72 kg	22.52 kg
Qty/20'GP	2700	2700	2700	2700
Automatic function	Float Switch	Float Switch	Float Switch	Float Switch