


Technical Data

Model	Voltage	Speed	Max. Flow	Max. Head	Motor Power		Discharge	Guide Rlal Fitting	Max. Solid Dia	N.W	G.W	Packing Dimension
	V	r.p.m	m³/h	m	kW	HP	in		mm	kg	kg	mm
150WQ150-10-7.5/4	380	1450	300	16	7.5	10	6"	150-150	75	160	188.1	1154x549x532
50WQ20-55-11	380	2900	45	60.5	11	15	2"	50-50	25	136	156	1040x420x477
50WQ30-50-11	380	2900	45	60.5	11	15	2"	50-50	25	136	156	1040x420x477
80WQ45-40-11	380	2900	60	50.5	11	15	3"	80-80	30	131	151	1040x420x477
80WQ70-30-11	380	2900	100	40.5	11	15	3"	80-80	30	137	157	1040x420x477
100WQ80-26-11	380	2900	120	42	11	15	4"	100-100	35	132	152	1040x420x477
100WQ100-25-11/4	380	1450	220	31	11	15	4"	100-100	50	252	274	616x520x1388
150WQ120-18-11	380	2900	160	30	11	15	6"	150-150	55	137	157	1040x420x477
150WQ180-11-11/4	380	1450	260	24	11	15	6"	150-150	60	264	286	616x520x1388
200WQ300-7-11/4	380	1450	450	17	11	15	8"	200-200	70	285	314	716x620x1488
200WQ400-5-11/4	380	1450	470	18	11	15	8"	200-200	55	285	314	716x620x1488
50WQ20-70-15	380	2900	45	75.5	15	20	2"	50-50	25	150	170	1040x420x477
50WQ30-65-15	380	2900	45	75.5	15	20	2"	50-50	25	150	170	1040x420x477
80WQ70-40-15	380	2900	100	49.5	15	20	3"	80-80	30	149	169	1040x420x477
100WQ100-30-15/4	380	1450	220	36	15	20	4"	100-100	50	273	295	616x520x1388
150WQ200-15-15/4	380	1450	290	29	15	20	6"	150-150	60	285	307	616x520x1388
200WQ250-11-15/4	380	1450	490	21	15	20	8"	200-200	70	305.5	334.5	716x620x1488
200WQ400-8-15/4	380	1450	525	19	15	20	8"	200-200	55	304.5	334.5	716x620x1488
50WQ20-80-18.5	380	2900	45	85.5	18.5	22	2"	50-50	25	217.5	242.5	1240x460x500
50WQ30-75-18.5	380	2900	45	85.5	18.5	22	2"	50-50	25	217.5	242.5	1240x460x500
80WQ70-50-18.5	380	2900	100	58.5	18.5	22	3"	80-80	30	212.5	237.5	1240x460x500
100WQ100-33-18.5/4	380	1450	220	39	18.5	25	4"	100-100	50	298	320	616x520x1388
150WQ150-25-18.5/4	380	1450	300	32	18.5	25	6"	150-150	60	305.5	327.5	616x520x1388
200WQ300-13-18.5/4	380	1450	530	25	18.5	25	8"	200-200	70	325.5	354.5	716x620x1488
200WQ400-10-18.5/4	380	1450	525	22	18.5	22	8"	200-200	55	325.5	354.5	716x620x1488
250WQ600-6-18.5/4	380	1450	750	18	18.5	22	10"	250-250	75	354	383	716x620x1488
50WQ20-90-22	380	2900	45	94	22	30	2"	50-50	25	225	250	1240x460x500
50WQ30-85-22	380	2900	45	94	22	30	2"	50-50	25	225	250	1240x460x500
80WQ70-55-22	380	2900	100	63	22	30	3"	80-80	30	219	244	1240x460x500
100WQ100-36-22/4	380	1450	220	42	22	30	4"	100-100	50	293	315	616x520x1388
150WQ150-30-22/4	380	1450	330	39	22	30	6"	150-150	60	312	334	616x520x1388
200WQ300-17-22/4	380	1450	550	27	22	30	8"	200-200	70	331.5	360.5	716x620x1488
200WQ400-13-22/4	380	1450	525	24.5	22	30	8"	200-200	55	331.5	360.5	716x620x1488
250WQ600-7-22/4	380	1450	800	22	22	30	10"	250-250	85	360	389	716x620x1488
150WQ150-34-30/4	380	1450	310	45	30	40	6"	150-150	55	497	519	780x600x1430
200WQ300-21-30/4	380	1450	570	33	30	40	8"	200-200	80	519	541	820x620x1470
250WQ500-14-30/4	380	1450	860	27	30	40	10"	250-250	85	512	535	780x650x1490
300WQ800-8-30/4	380	1450	1040	22	30	40	12"	300-300	90	557	581	860x720x1540
150WQ150-40-37/4	380	1450	330	50	37	50	6"	150-150	55	557	579	780x600x1480
200WQ300-25-37/4	380	1450	620	39	37	50	8"	200-200	80	576	598	820x620x1520
250WQ500-18-37/4	380	1450	930	30	37	50	10"	250-250	85	570	593	780x650x1540
300WQ800-11-37/4	380	1450	1060	25	37	50	12"	300-300	90	614	638	860x720x1590
200WQ300-30-45/4	380	1450	660	43	45	60	8"	200-200	80	612	634	820x620x1520
250WQ500-21-45/4	380	1450	950	34	45	60	10"	250-250	85	606	629	780x650x1540
300WQ800-14-45/4	380	1450	1080	28	45	60	12"	300-300	90	650	674	860x720x1590

Dimension

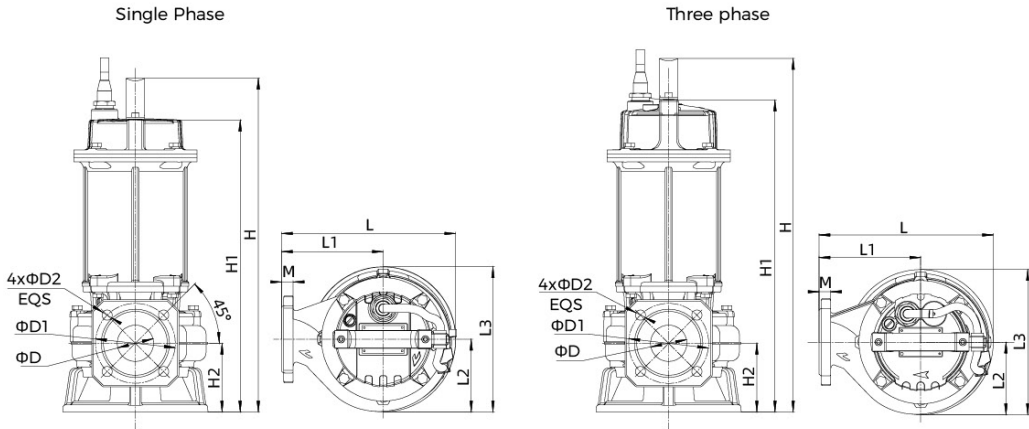

Model	L	L1	L2	L3	M	H	H1	H2	D	D1	D2
50WQ4-6-0.18M	214	120	99	187	16	422	374	81	50	110	14
50WQD4-6-0.18M(A)	214	120	99	187	16	422	374	81	50	110	14
50WQ5-7-0.25M	214	120	99	187	16	422	374	81	50	110	14
50WQD5-7-0.25M(A)	214	120	99	187	16	422	374	81	50	110	14
50WQ7-7-0.37M	214	120	99	187	16	422	374	81	50	110	14
50WQD7-7-0.37M(A)	214	120	99	187	16	422	374	81	50	110	14
50WQ6-12-0.55	214	120	99	187	16	422	374	81	50	110	14
50WQD6-12-0.55(A)	214	120	99	187	16	422	374	81	50	110	14
50WQ6-16-0.75	214	120	99	187	16	422	374	81	50	110	14
50WQD6-16-0.75(A)	214	120	99	187	16	422	374	81	50	110	14
50WQ10-10-0.75	214	120	99	187	16	422	374	81	50	110	14
50WQD10-10-0.75(A)	214	120	99	187	16	422	374	81	50	110	14
50WQ10-16-1.1	240	140	99	200	16	459.5	402	94.5	50	110	14
50WQD10-16-1.1(A)	240	140	99	200	16	487.5	429.5	94.5	50	110	14
50WQ15-10-1.1	240	140	99	200	16	459.5	402	94.5	50	110	14
50WQD15-10-1.1(A)	240	140	99	200	16	487.5	429.5	94.5	50	110	14
65WQ15-10-1.1	240	140	99	200	16	462	404.5	97	65	130	14
65WQD15-10-1.1(A)	240	140	99	200	16	490	432	97	65	130	14
50WQ10-20-1.5	240	140	99	200	16	459.5	402	94.5	50	110	14
50WQD10-20-1.5	240	140	99	200	16	523	465.5	94.5	50	110	14
50WQ15-15-1.5	240	140	99	200	16	459.5	402	94.5	50	110	14
50WQD15-15-1.5	240	140	99	200	16	523	465.5	94.5	50	110	14
65WQ15-15-1.5	240	140	99	200	16	462	404.5	97	65	130	14
65WQD15-15-1.5	240	140	99	200	16	526	468	97	65	130	14
50WQ15-20-2.2	240	140	99	200	16	495.5	438	94.5	50	110	14
65WQ15-20-2.2	240	140	99	200	16	498	440.5	97	65	130	14
80WQ40-9-2.2	240	140	103	203	18	515.5	458	106.5	80	150	19
50WQ18-25-3	289	170	121.5	240	16	530	484	109.5	50	110	14
65WQ25-22-3	289	170	121.5	240	16	530	484	109.5	65	130	14
80WQ40-13-3	289	170	123	242	18	553	507	121.5	80	150	19
100WQ60-9-3	303	180	135	254	18	557	511	125.5	100	170	19
50WQ18-32-4	289	170	121.5	240	16	530	484	109.5	50	110	14
65WQ25-28-4	289	170	121.5	240	16	530	484	109.5	65	130	14
80WQ40-18-4	289	170	123	242	18	553	507	121.5	80	150	19
100WQ60-13-4	303	180	135	254	18	557	511	125.5	100	170	19