


## Data sheet: Wilo-Multivert MVI 812 (3~400 V, EPDM, PN 16)


### Pump curves

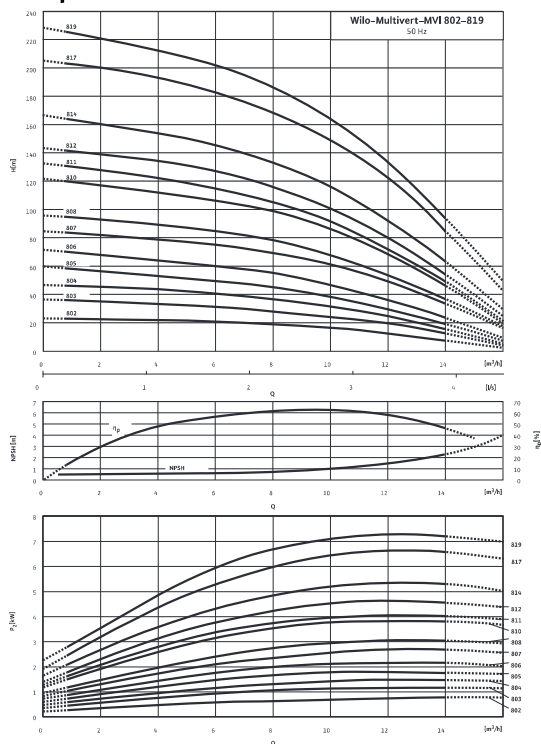

Pump curves in accordance with ISO 9906, class 2

### Terminal diagram

Three-phase current  $\geq 5.5$  kW; Y- $\Delta$ -direct starting



### Power

Fluid temperature	$T$	-15...+120 °C
Max. ambient temperature	$T$	40 °C
Maximum operating pressure	$p_{max}$	16 bar

### Minimum Efficiency Index (MEI)

Minimum Efficiency Index (MEI)	$\geq 0.40$
--------------------------------	-------------

### Motor

Insulation class	F	
Protection class	IP 55	
Mains connection	3~400 V, 50 Hz	
Nominal motor power	$P_2$	5.5 kW
Power consumption	$P_1$	6.24 kW
Nominal current 3~400 V, 50 Hz	$I_N$	10.7 A
Motor efficiency	$\eta_m$ 50%	85.2 %
Motor efficiency	$\eta_m$ 75%	86.9 %
Motor efficiency	$\eta_m$ 100%	88.1 %

### Connections

Nominal diameter, oval flange (on the pressure side)	G 1½	
Nominal diameter, oval flange (on the suction side)	G 1½	
Rated pressure level (on the pressure side)	$PN$	PN 16
Rated pressure level (on the suction side)	$PN$	PN 16

### Materials

Impeller	1.4301 [AISI304]
Pump housing	1.4301 [AISI304]
Pump shaft	1.4301 [AISI304]
Static seal	EPDM
Mechanical seal	Q1BE3GG

### Information for order placements

Make	Wilo	
Type	MVI 812	
Art no.	4024741	
Weight approx.	$m$	58.0 kg

• = available, - = not available