


V1300DF & V1800DF DRAINAGE PUMP

CW FLOAT SWITCH, CUTTER & 6M CABLE

Performance Chart

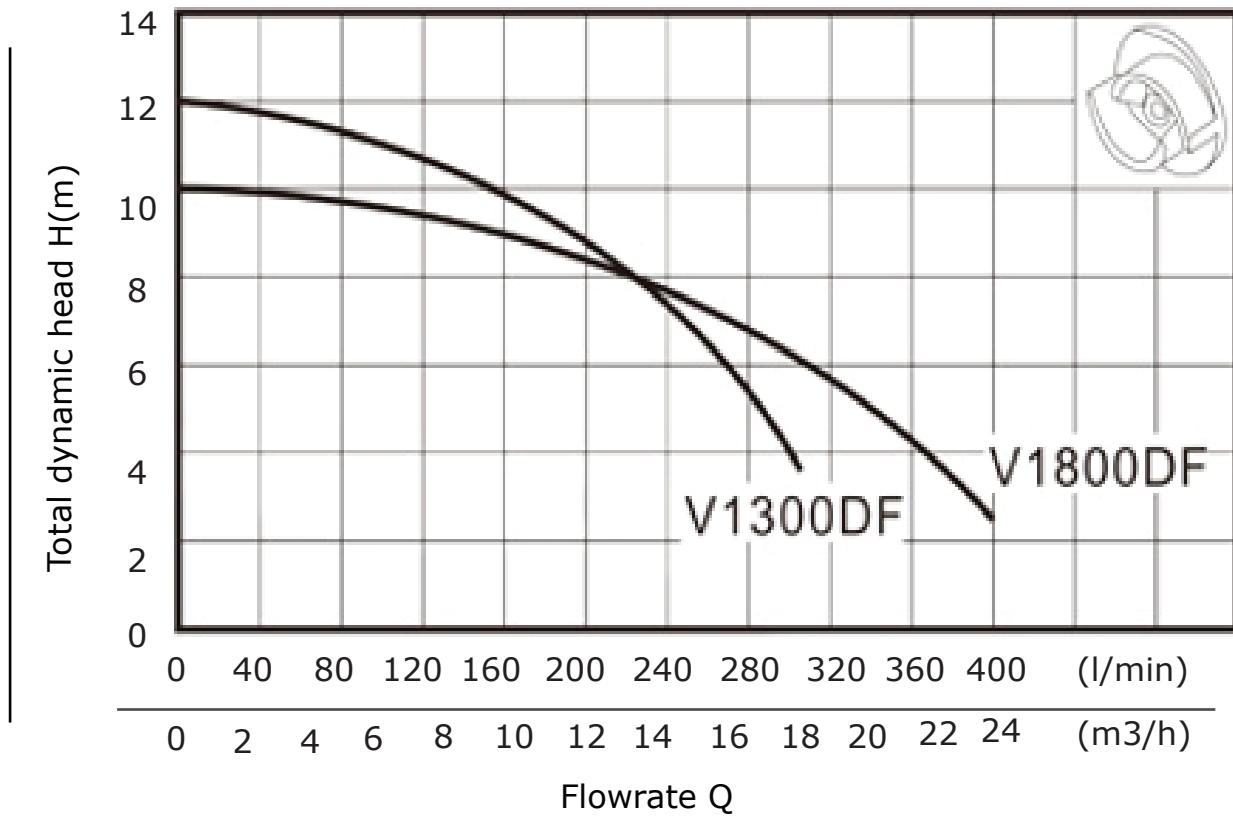

Performance Table

Model	Power (kW)	Outlet Diameter (mm)	Voltage/Frequency (V/Hz)	Max. Flow (l/min)	Max. Head (m)	G.W. (kg)
V1300DF	1.3	50	220/50	300	12	25.5
V1800DF	1.8	75	220/50	400	10	32.5



Application

- Waste water drainage in factories, construction sites and commercial facilities
- Drainage system in municipal sewage treatment plants
- Drainage stations in residential quarters
- Municipal projects
- Methane pools and field irrigation in countryside

Pump

- Max. immersion depth: 5 m
- Max. liquid temperature: 40 C
- Liquid pH value: 4-10
- Max. liquids density: 1.2 x 10kg/m

Motor

- Copper winding
- Built-in thermal protector
- Stainless steel welded shaft
- Insulation Class: B
- Protection Class: IPX8