

SVM90




SVM90




Performance table

Model	Associated motor(kW)	Q (m ³ /h)	50	60	70	80	90	100	110
SVM90-10-1	5.5	H (m)	22	19	17	16	13	10	6
SVM90-10	7.5		25	24	22	21	19	16	12
SVM90-20-2	11		41	39	36	32	28	22	15
SVM90-20	15		53	50	47	44	40	36	30
SVM90-30-2	18.5		68	65	60	55	49	41	32
SVM90-30	22		81	77	72	67	62	55	48
SVM90-40-2	26		98	93	87	80	72	62	50
SVM90-40	30		110	105	100	92	84	76	66
SVM90-50-2	37		126	120	113	104	93	81	68
SVM90-50	37		139	131	124	115	106	94	83
SVM90-60-2	45		155	148	139	129	117	102	86
SVM90-60	45		168	160	150	141	130	117	103

Performance curves

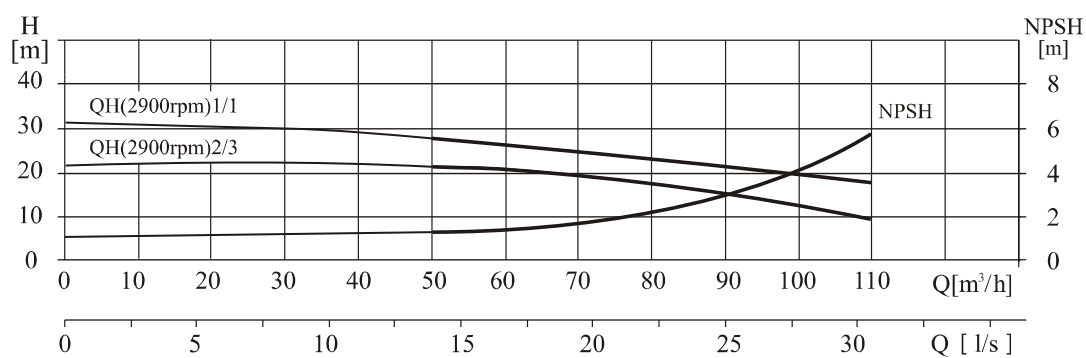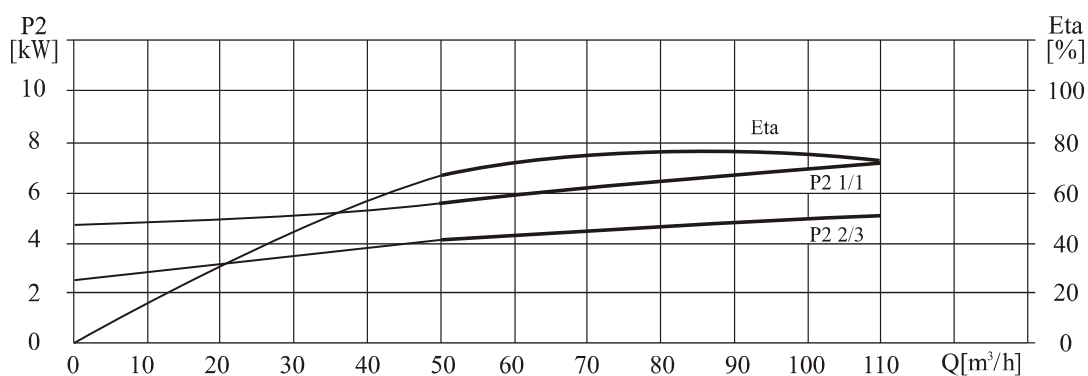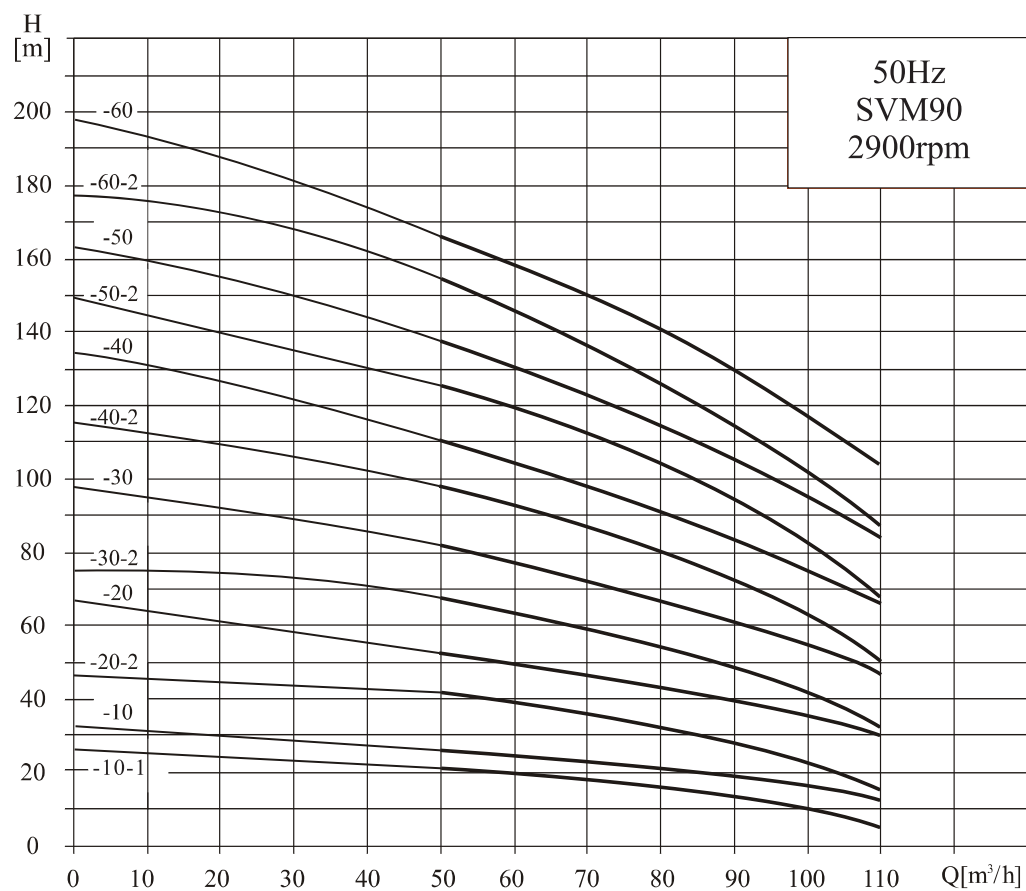


Size & Weight

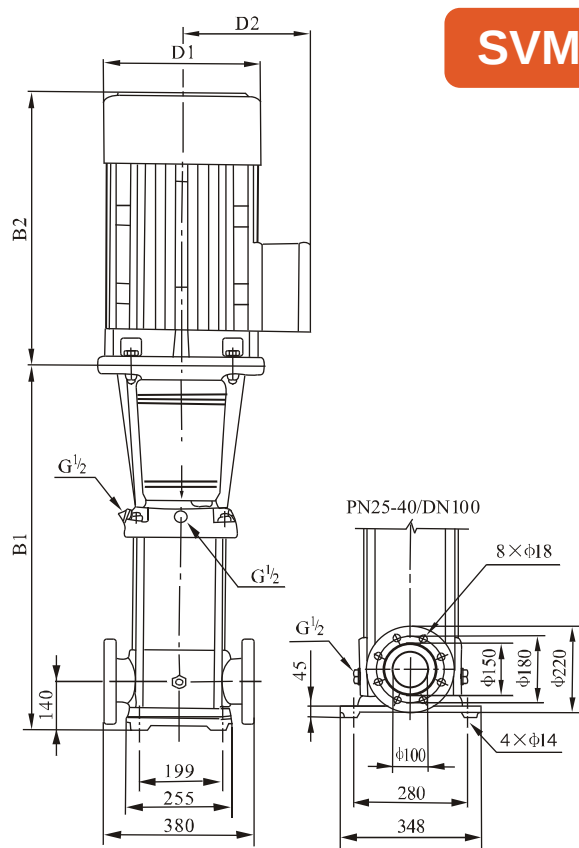

SVM90

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM90-10-1	571	390	961	260	208	105
SVM90-10	571	390	961	260	208	110
SVM90-20-2	773	500	1273	330	255	181
SVM90-20	773	500	1273	330	255	192
SVM90-30-2	865	550	1415	330	255	215
SVM90-30	865	575	1440	360	285	252
SVM90-40-2	957	575	1532	360	285	271
SVM90-40	957	650	1607	400	310	312
SVM90-50-2	1049	650	1699	400	310	336
SVM90-50	1049	650	1699	400	310	336
SVM90-60-2	1141	685	1826	460	340	407
SVM90-60	1141	685	1826	460	340	407

Installation drawing

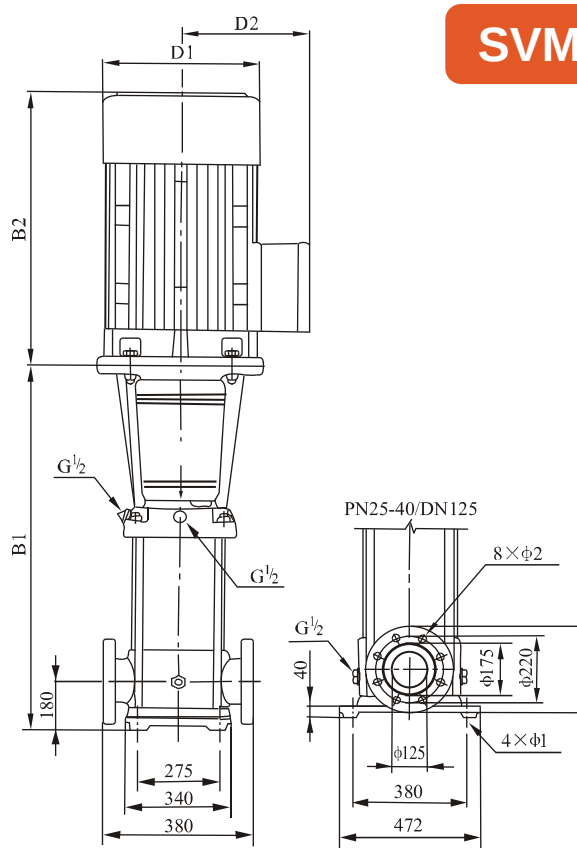

SVM120

Model	Size (mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM120-10	840	500	1340	330	255	230
SVM120-20-2	1000	500	1500	330	255	245
SVM120-20-1	1000	550	1550	330	255	250
SVM120-20	1000	575	1575	360	285	285
SVM120-30-2	1160	575	1735	360	285	326
SVM120-30-1	1160	650	1810	400	310	360
SVM120-30	1160	650	1810	400	310	360
SVM120-40-2	1320	650	1970	400	310	400
SVM120-40-1	1320	650	1970	400	310	400
SVM120-40	1320	685	2005	460	340	460
SVM120-50-2	1480	685	2165	460	340	470
SVM120-50-1	1480	685	2165	460	340	470
SVM120-50	1510	760	2270	540	370	575
SVM120-60-2	1670	760	2430	540	370	585
SVM120-60-1	1670	760	2430	540	370	585
SVM120-60	1830	845	2515	580	410	705
SVM120-70-2	1830	845	2675	580	410	715
SVM120-70-1	1830	845	2675	580	410	715
SVM120-70	1830	845	2675	580	410	715