


4 SD 8

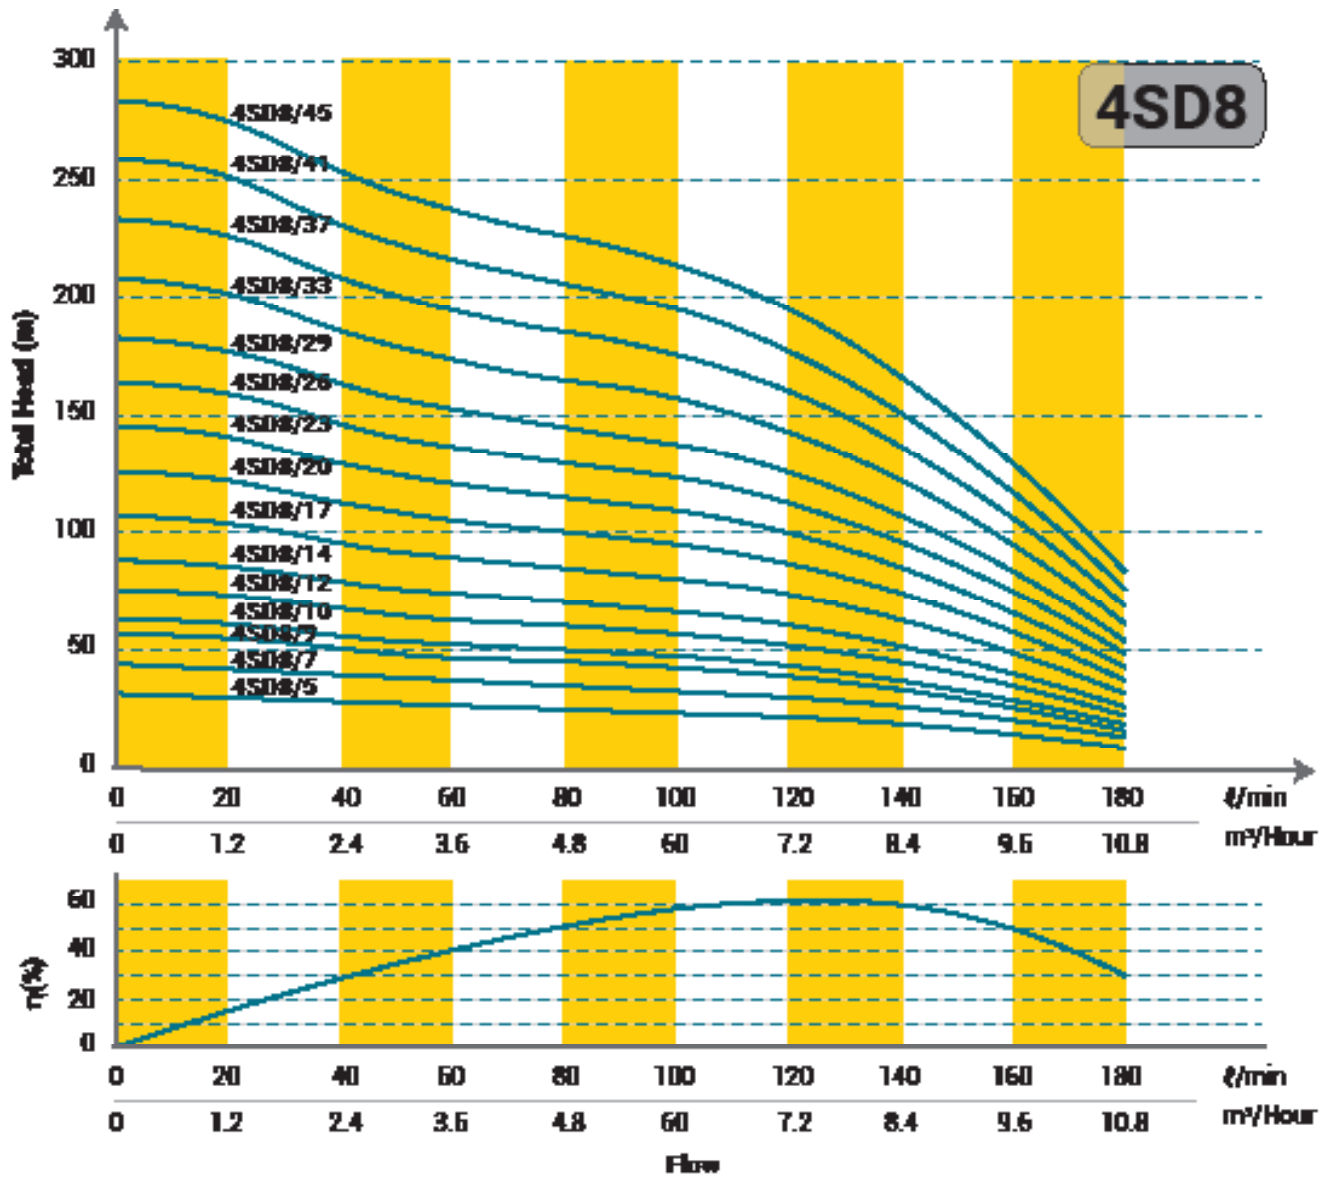

Performance Data 50Hz

MODEL (50Hz)		P2		Delivery n=2850 1/min											
1 - 220-240V	3 - 380 - 415V	kW	HP	m³/h	0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.8	
				l/min	0	20	40	60	80	100	120	140	160	180	
4SDM8/5	4SD8/5	0.55	0.75	HEAD (m)	32	31	28	26	25	24	22	18	14	9	
4SDM8/7	4SD8/7	0.75	1		44	43	39	37	35	33	30	30	26	20	13
4SDM8/9	4SD8/9	1.1	1.5		57	55	51	47	45	43	39	39	33	26	17
4SDM8/10	4SD8/10	1.5	2		63	61	56	53	50	48	43	43	37	28	18
4SDM8/12	4SD8/12	1.5	2		76	73	67	63	60	57	52	52	44	34	22
4SDM8/14	4SD8/14	2.2	3		88	86	79	74	70	67	61	61	52	40	26
4SDM8/17	4SD8/17	2.2	3		107	104	96	90	85	81	74	74	63	48	31
4SDM8/20	4SD8/20	3	4		126	122	112	105	100	95	87	87	74	57	37
-	4SD8/23	3	4		145	141	129	121	115	109	100	100	85	65	42
-	4SD8/26	4	5.5		164	159	146	137	130	124	113	113	96	74	48
-	4SD8/29	4	5.5		183	177	163	153	145	138	126	126	107	82	53
-	4SD8/33	5.5	7.5		208	202	186	174	165	157	143	143	122	94	61
-	4SD8/37	5.5	7.5		234	226	208	195	185	176	160	160	136	105	68
-	4SD8/41	7.5	10		259	251	231	216	205	195	178	178	151	117	76
-	4SD8/45	7.5	10		284	275	253	237	225	214	195	195	166	128	83