

SVM16




SVM16




Performance table

Model	Associated motor(kW)	Q (m ³ /h)	8	10	12	14	16	18	20	22
SVM16-20	2.2	H (m)	27	26	25	24	22	21	19	16
SVM16-30	3.0		41	40	38	37	34	32	29	25
SVM16-40	4.0		54	53	52	49	46	43	38	34
SVM16-50	5.5		68	67	65	62	58	54	48	43
SVM16-60	5.5		82	80	78	74	70	64	58	52
SVM16-70	7.5		96	95	91	87	82	76	68	61
SVM16-80	7.5		110	108	104	99	94	86	77	70
SVM16-100	9.2		138	136	131	125	118	109	97	87
SVM16-120	11		166	162	157	150	141	130	116	105
SVM16-140	15		194	190	184	175	166	152	136	122
SVM16-160	15		222	217	210	200	189	174	156	140

Performance curves

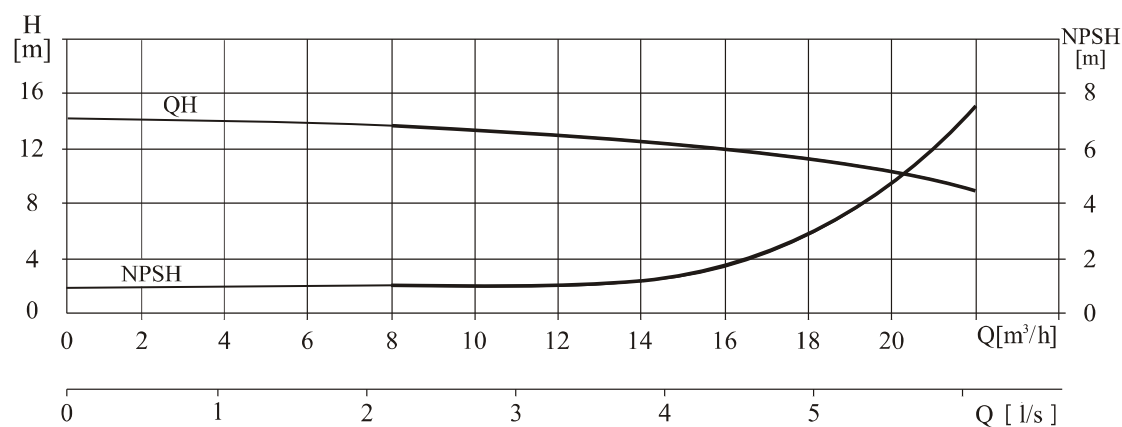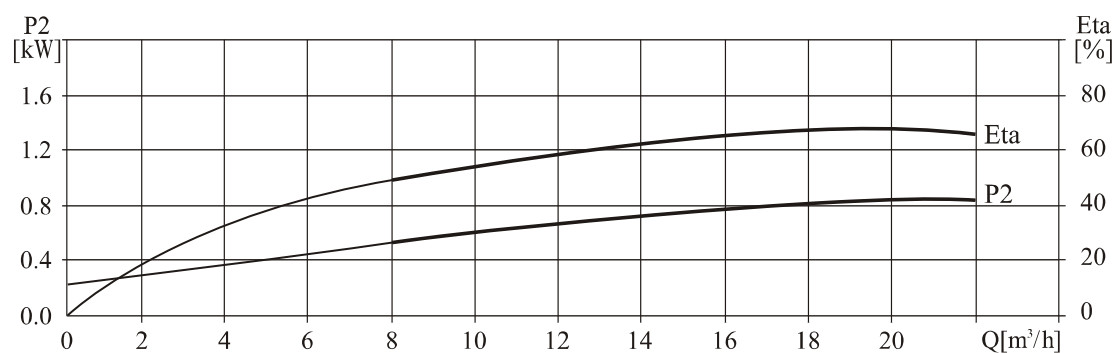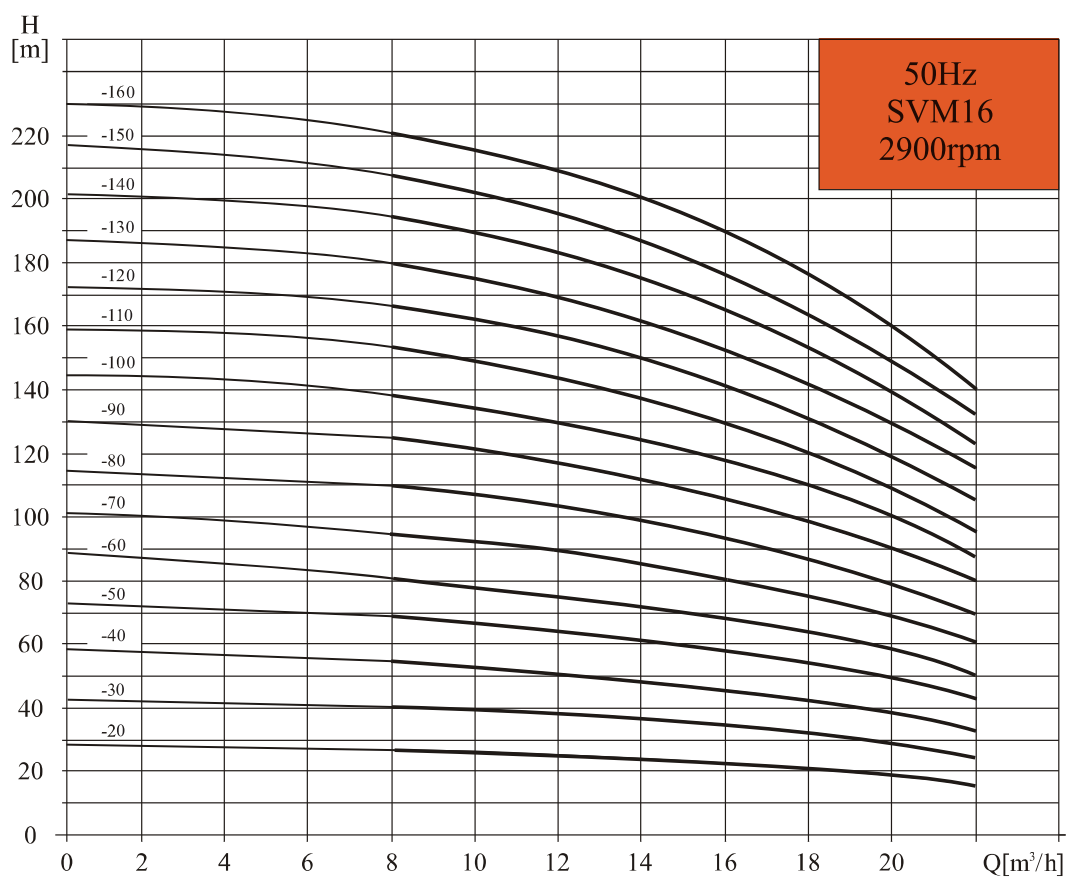


Size & Weight

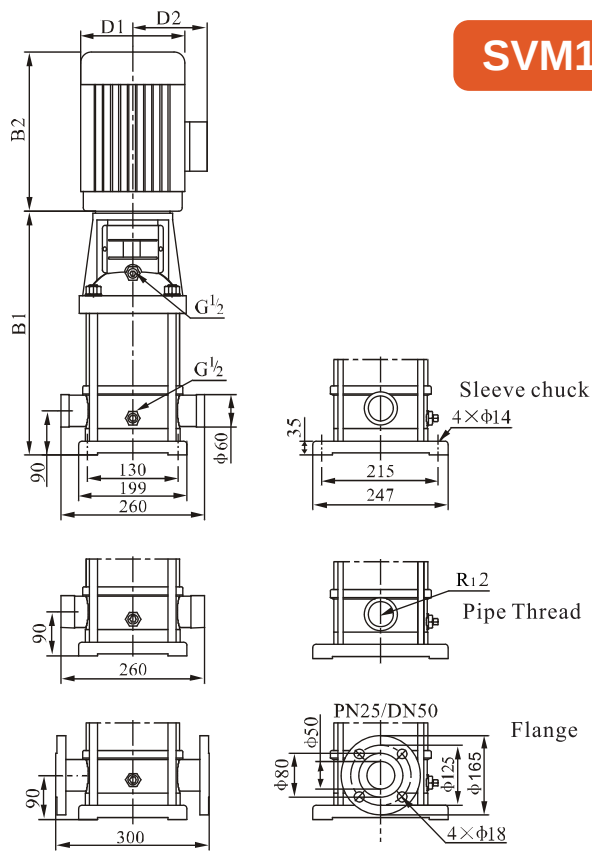

SVM15

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM15-10	352	245	597	170	142	33
SVM15-20	397	290	687	190	155	42
SVM15-30	452	345	797	197	165	50
SVM15-40	497	355	852	230	185	59
SVM15-50	542	355	897	230	185	60
SVM15-60	607	390	997	260	210	77
SVM15-70	652	390	1042	260	210	78
SVM15-80	697	390	1087	260	210	86
SVM15-90	742	390	1132	260	210	87
SVM15-100	875	500	1375	330	255	160
SVM15-120	965	500	1465	330	255	161
SVM15-140	1055	500	1555	330	255	162
SVM15-170	1190	500	1690	330	255	179

Installation drawing

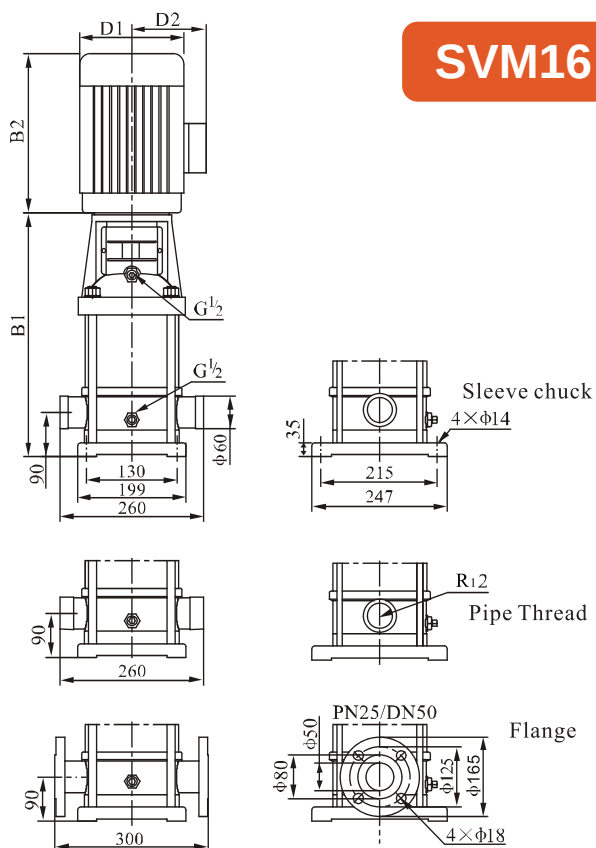

SVM16

Size & Weight

Model	Size(mm)					Weight (kg)
	B1	B2	B1+B2	D1	D2	
SVM16-20	397	290	687	190	155	42
SVM16-30	452	345	797	197	165	50
SVM16-40	497	355	852	230	188	59
SVM16-50	562	390	952	260	208	76
SVM16-60	607	390	997	260	208	77
SVM16-70	652	390	1042	260	208	84
SVM16-80	697	390	1087	260	208	86
SVM16-100	787	390	1177	260	208	106
SVM16-120	965	500	1465	330	255	161
SVM16-140	1055	500	1555	330	255	174
SVM16-160	1145	500	1645	330	255	178