


4 SD 12

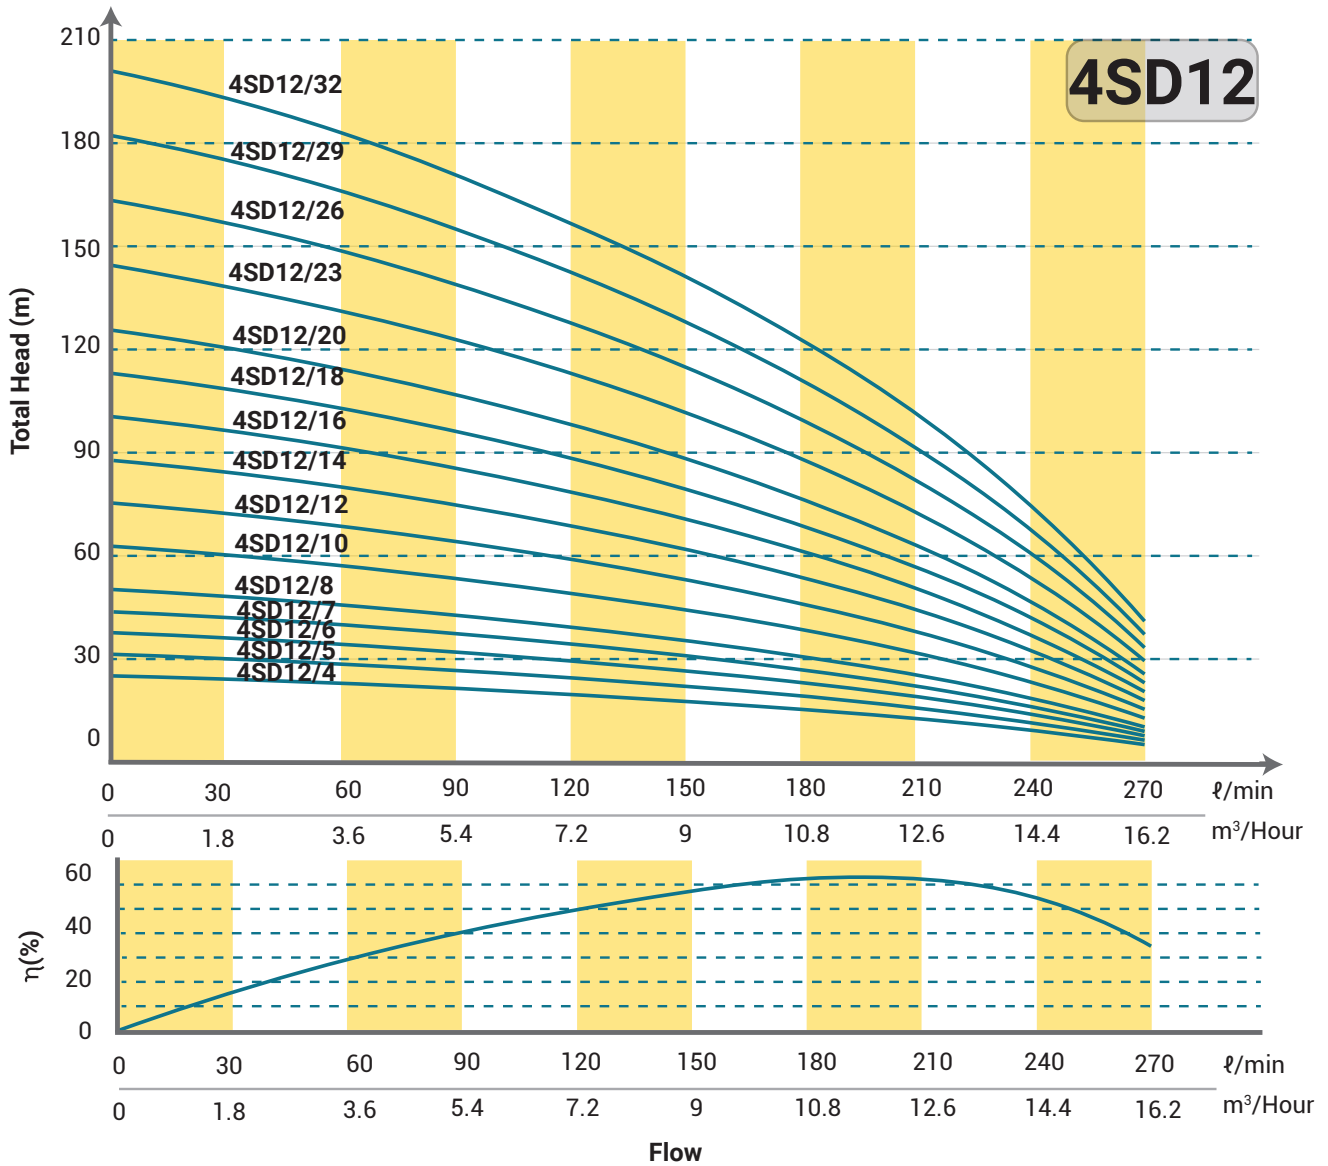

Performance Data 50Hz

MODEL (50Hz)		P2		Delivery											
				n≈2850 1/min											
				m³/h	0	1.8	3.6	5.4	7.2	9.0	10.8	12.6	14.4	16.2	
1 - 220-240V	3 - 380 - 415V	kW	HP	l/min	0	30	60	90	120	150	180	210	240	270	
4SDM12/4	4SD12/4	0.75	1	HEAD (m)	25	24	23	21	20	18	15	13	9	5	
4SDM12/5	4SD12/5	1.1	1.5		31	30	29	27	25	22	19	16	12	6	
4SDM12/6	4SD12/6	1.1	1.5		38	36	34	32	29	26	23	19	14	8	
4SDM12/7	4SD12/7	1.5	2		44	42	40	37	34	31	27	22	16	9	
4SDM12/8	4SD12/8	1.5	2		50	48	46	43	39	35	31	25	19	10	
4SDM12/10	4SD12/10	2.2	3		63	60	57	53	49	44	38	32	23	13	
4SDM12/12	4SD12/12	2.2	3		75	72	69	64	59	53	46	38	28	15	
-	4SD12/14	3	4		88	84	80	75	69	62	54	44	33	18	
-	4SD12/16	3	4		101	96	92	86	79	71	62	51	38	21	
-	4SD12/18	4	5.5		113	108	103	96	88	79	69	57	42	23	
-	4SD12/20	4	5.5		126	120	114	107	98	88	77	63	47	26	
-	4SD12/23	5.5	7.5		144	138	132	123	113	101	88	73	54	29	
-	4SD12/26	5.5	7.5		163	156	149	139	128	115	100	82	61	33	
-	4SD12/29	7.5	10		182	174	166	155	142	128	111	92	68	37	
-	4SD12/32	7.5	10		201	192	183	171	157	141	123	101	75	41	